

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/DK04/000910

International filing date: 22 December 2004 (22.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/535,522
Filing date: 12 January 2004 (12.01.2004)

Date of receipt at the International Bureau: 31 January 2005 (31.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

PA 1267598

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office


January 04, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/535,522

FILING DATE: January 12, 2004

DK / 04 / 910

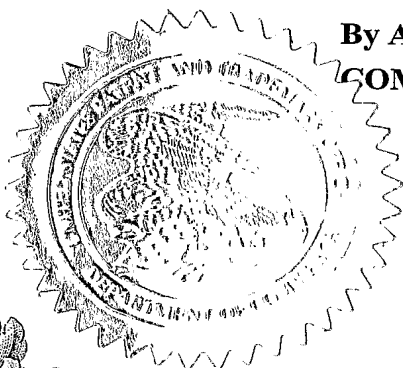

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

H. L. JACKSON
Certifying Officer

**U.S. PATENT AND TRADEMARK OFFICE
PROVISIONAL APPLICATION FOR PATENT COVER SHEET**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT
under 37 C.F.R. §1.53(b)(2)

Atty. Docket: CHRISTENSEN9

19587 U.S. PTO
60/535522

INVENTOR(S)/APPLICANT(S)			
LAST NAME	FIRST NAME	MI	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)
Soeren	CHRISTENSEN	F.	Frederiksberg, Denmark
lb	JOHANNSEN		Vaerloese, Denmark

☐ Additional inventors are being named on separately numbered sheets attached hereto

TITLE OF THE INVENTION (280 characters max)

APPARATUS AND METHODS FOR ANALYSIS AND SORTING OF PARTICLES SUCH AS POLYMER BEADS

CORRESPONDENCE ADDRESS

Direct all correspondence to the address associated with **Customer Number 001444**, which is presently:
BROWDY AND NEIMARK, P.L.L.C.
624 Ninth Street, N.W., Suite 300
Washington, D.C. 20001-5303

ENCLOSED APPLICATION PARTS (check all that apply)

<input checked="" type="checkbox"/> Specification	Number of Pages	124	<input type="checkbox"/> Applicant claims small entity status. See 37 C.F.R. §1.27
<input checked="" type="checkbox"/> Drawing(s)	Number of Sheets	15	<input type="checkbox"/> Other (specify) _____

METHOD OF PAYMENT (check one)

☒ Credit Card Payment Form PTO-2038 is enclosed to cover the Provisional filing fee of
☒ \$160 large entity ☐ \$80 small entity

☒ The Commissioner is hereby authorized to charge filing fees and credit Deposit Account Number 02-4035

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No ☐ Yes, the name of the U.S. Government agency and the Government contract number are:

Respectfully submitted,

BROWDY AND NEIMARK, P.L.L.C.

By: Iver P. Cooper
Registration No.: 28,005

Date: January 12, 2004

IPC:jlu

Apparatus and methods for analysis and sorting of particles such as polymer beads

All patent and non-patent references cited herein are incorporated in their entirety.

5

Field of invention

The present invention relates to an apparatus for analysing beads and particles, such as polymer beads used e.g. for solid phase synthesis. The apparatus in one embodiment comprises a rotatable, circular disc comprising a plurality of through-going inlets, wherein an individual bead from a composition comprising different beads can be fixed to the disc at the end-position of a through-going inlet by applying a pressure drop over said disc comprising said through-going inlets. The pressure drop results in beads being sucked (i.e. detachably fixed) onto the disc on top of the through-going inlets.

15

When the disc is rotated the beads are transferred from the position where they initially became attached to the disc to fixed positions wherein suitable devices for measuring and/or analysing and/or sorting the beads can be operated in order to e.g. measure and/or analyse and/or sort at least one bead of a plurality of beads.

20

Also provided are methods for measuring and/or analysing and/or sorting particles, as well as methods for processing particles once they have been analysed and/or sorted.

25

Background of invention

When large numbers of polymer beads, such as more than 10.000 beads, are to be analysed one by one at an acceptable total analysis time, the beads are typically dispersed in a liquid and passed through a measuring section of the analysis instrument.

30

In order for the beads to be lined up in a flow channel and passed through a measuring section one by one, while at the same time avoiding that beads stick together

35

or to the walls of the flow system, a high flow velocity is required. Typical flow velocities are in the order of 1m/s (meter per second) is required. Consequently the residence time of each bead in the measuring section is very short, typically less than 1 millisecond. This poses a number of serious problem as not all measuring or
5 analysing devices can operate within such a short "window of opportunity" for measuring and analysing bead properties. Furthermore, the devices which can in fact operate in the "window of opportunity" of less than 1 millisecond often does not work reliably or under optimal conditions with such a short residence time of the beads.

10 Also, the demands on the measuring components are very high and prevents the application of certain advanced and time consuming measuring methods. If there is a need for sorting the beads on the basis of the measured properties, there is often not enough time to complete the algebra and very complicated mathematical calculations required to establish whether a bead is to be selected or discarded on the
15 basis of the measurement and analysis performed. One reason for this shortcoming of prior art devices for bead sorting is that the sorting unit is typically placed at a very short distance downstream from the measuring section. Accordingly, time consuming mathematical calculations cannot be used in this context as a bead would have passed the sorting unit long before the result of the measuring of bead properties can be established.
20

Increasing the distance between the measuring section and the sorting unit often does not offer any practical solution to the problem as an increased distance also increases the risk of beads getting stuck to the wall sections, or getting stuck together, and a longer flow section furthermore contributes to variations in the velocity
25 of individual beads, both of which factors will result in a reduced validity of the results required for a correct sorting of beads.

30 A further problem often encountered in purely fluid dynamic based bead manipulation methods is that the flow of beads cannot be interrupted on demand without such an interruption causing a considerable shutdown period followed by often laborious and time-consuming start up procedures.

35 During the operation of a purely fluid based bead sorter, such as e.g. the COPAS bead sorter supplied by Harvard Bioscience, a number of difficulties regarding fluid

handling of particles such as e.g. polymer beads are experienced. For example, beads tend to get stuck in the feed tube to the flow cell where the beads are analysed, and two or more beads may therefore stick together as they enter the flow cell. As a result a considerable fraction of beads are not sorted correctly, such as e.g. more than 20%, and the resulting fractions of beads must be resorted to obtain an acceptable level of accuracy. This is time-consuming and inefficient as it requires beads to be measured and analysed more than once.

In order for the beads to line up one by one in the feed tube to the flow cell a high flow velocity of about 1 m/s is required corresponding to a measuring time of less than 1 millisecond per bead and a computation time of less than 100 milliseconds from bead measurement to bead sorting. This places very high demands on sensors, data handling equipment, and the fluid handling components of the sorting unit. In cases where beads are to be imaged even lower exposure times, e.g. 10 microseconds, are required for freezing the motion of a passing bead and obtaining a sharp image.

In cases where advanced bead analysis, such as resolving the three dimensional structure of spatially encoded microparticles must be carried out at a high throughput rate, high flow velocities and corresponding low residence times in the flow cell poses an even greater challenge for the equipment as the data handling is much more complex compared to conventional bead sorters in which a more simple analysis, such as bead size or total fluorescence, is measured.

There is a need for an improved apparatus for bead analysis and sorting which allows high throughput rates while maintaining sufficiently high residence times, e.g. in a compartment or section in which bead properties can be measured, thus ensuring that more reliable data are generated for each and every bead, wherein each bead is preferably only measured once prior to being sorted on the basis of the result and analysis of the measurement of a bead property.

WO 01/77391 A1 (Quantum Dot) discloses devices, systems, kits, and methods for detecting and/or identifying a plurality of spectrally labeled bodies well-suited for performing multiplexed assays. By spectrally labeling the beads with materials which generate identifiable spectra, a plurality of beads may be identified within the fluid.

Reading of the beads is facilitated by restraining the beads in arrays, and/or using a focused laser. The present invention is in one aspect directed to a bead sorter comprising a rotatable, circular capture body comprising a plurality of through-going inlets.

5

WO 99/42209 (Takeda) discloses a bead sorter comprising a bead holder. The bead holder has a surface having a recess sized to receive a single bead, a passage connected at one end thereof to the recess, and a restricting portion for preventing the bead from being entering into the passage. Also, the bead separator has first, second, and third stations. The first station is to introduce a negative pressure in the passage, thereby holding the bead in the recess. The second station is to eject a liquid around the recess retaining the bead, thereby removing a bead or beads possibly existing around the recess away from the recess. The third station is to introduce a positive pressure in the passage, thereby releasing the bead from the recess. A transporting means is provided for moving the recess through the first, second, and then third stations. One embodiment of the present invention is directed to a bead sorter which does not comprise a bead holder having a recess in at least one surface. Rather, the present invention employs in one embodiment a planar disc comprising a plurality of through-going inlets.

15
20

Summary of invention

The present invention relates in one aspect to an apparatus for analysing beads and particles, such as polymer beads used e.g. for solid phase synthesis. The apparatus in one embodiment comprises a rotatable, capture body, such as a circular disc comprising a plurality of through-going inlets, wherein an individual bead from a composition comprising different beads can be fixed to the disc at the end-position of a through-going inlet by applying a pressure drop over said disc comprising said through-going inlets. The pressure drop results in beads being sucked (i.e. detachably fixed) onto the surface of the planar disc on top of the through-going inlets. As essentially all of the bead is present on top of the disc (i.e. extends from the surface rather than being contained in a recess therein), analysis of bead properties can be performed more readily and more easily while still ensuring a high through-put rate.

30
35

When the capture body, preferably in the form of a planar disc comprising a plurality of through-going holes, is rotated, the beads are transferred from the position where they initially became attached to the disc to fixed positions wherein suitable devices for measuring and/or analysing and/or sorting the beads can be operated in order to
 5 e.g. measure and/or analyse and/or sort at least one bead of a plurality of beads.

The present invention offers several solutions to the problems associated with prior art proposals for achieving a more efficient sorting of e.g. polymer beads:

10 The present invention ensures, when compared to the prior art,

- i) that the comparatively short measurement times of prior art devices can be increased, thus allowing more reliable data to be generated, and/or allowing
 15 a wider variety of analysing equipment to be used,
- ii) that the comparatively short analysis time (i.e. time for algebra/mathematical calculations) of prior art devices can be increased considerably, thereby allowing more conclusive results to be generated, thereby allowing a more correct sorting to be achieved,
 20
- iii) that the limited spatial control over beads in prior art flow systems can be increased as the beads are detachably fixed to the capture body of the vacuum container of the apparatus of the present invention, and
- 25 iv) that the sorting method can be interrupted at request for a short period of time without decreasing the high through-put rate - the reason being that no
 time-consuming and laborious start-up procedures are required.

30 In summary, when compared to fluid dynamics based instruments, the present invention allows for measurement exposure times orders of magnitude higher while maintaining comparable through-put rates, i.e. total number of beads screened per total screening time.

In one aspect of the present invention there is provided an apparatus for measuring a plurality of optically detectable particles or beads, such as polymer beads, said apparatus comprising

- 5 a) a vacuum container comprising at least one planar capture body capable of rotating around a central axis,

wherein said planar capture body comprises a plurality of through-going inlets,

10

wherein the diameter of each inlet is smaller than the average diameter of the beads being measured and/or analysed and/or sorted,

- 15 b) a pressure controlling device capable of controlling the pressure in the vacuum container, and

- c) a device for rotating the vacuum container around the axis of the capture disc.

20 The apparatus in one embodiment further comprises an analysing device for analysing results being generated from the measurement of the at least one property of the at least one bead or particle, wherein said analysis enables individual beads to be characterised and/or identified and optionally also sorted.

25 Also provided in accordance with the present invention are methods for measuring ~~and/or analysing and/or sorting particles, as well as methods for processing particles~~ once they have been analysed and/or sorted. In one aspect the methods comprise the steps of diverting the beads to the bead sorting apparatus of the invention, measuring at least one property of at least one bead, analysing the result of the measurement of the at least one property, and sorting at least one bead based on the analysis of the measurement result.

30

The analysis of beads can involve a determination of at least one bead property and/or involve identifying individual beads characterised by at least one unique feature, such as a plurality of spatially immobilised microparticles in each bead.

35

Beads comprising a plurality of spatially immobilised microparticles are termed "encoded" beads.

5 The identification of individual beads from a composition of beads can involve a determination of the coordinates of the plurality of spatially immobilised microparticles in an "encoded" bead. The determination of the spatial coordinates preferably allows one to generate at least one distance matrix for the "encoded" bead to be identified.

10 Distance matrix data can be further processed in order to provide - if required - more conclusive results on the basis of which the identity of an individual "encoded" bead can be determined. One further data processing step involves providing, for an individual "encoded" bead to be identified, a set of all the possible geometrical figures, such as triangles, generated on the basis of the spatial coordinates used for
15 the generation of at least one distance matrix for the bead in question.

It is thus possible to generate - based on the spatial coordinates of the spatially immobilised microparticles initially used for a determination of at least one distance matrix of the individual "encoded" bead to be identified - a well-defined set of all (i.e.
20 the total set of) geometrical figures, such as triangles, which can be generated from the set of spatial coordinates of the spatially immobilised microparticles of a single "encoded" bead to be identified. The total set of e.g. triangles generated in this way can be used for the identification of individual "encoded" beads in a population of different beads such as polymer beads used for solid phase synthesis.

25

~~As data for the identification of all "encoded" beads in the bead population have~~
initially been recorded on a data storage medium, i.e. data for the identification of all "encoded" beads in the bead population have been recorded prior to the actual step of identifying individual beads, all distance matrices and/or all geometrical figures
30 will already have been stored on the data storage medium. The total set of distance matrices and/or the total set of geometrical figures is therefore available and can thus be used for analysing and/or identifying individual "encoded" beads. Consequently, it is possible to compare - for an "encoded" bead to be identified - at least one distance matrix, or the total set of geometrical figures one can generate on
35 the basis of the spatial coordinates of the spatially immobilised microparticles used

for the distance matrix determination. An individual "encoded" bead will be identified once a "match" is found between the recorded at least one distance matrix for the bead to be identified and the already stored at least one distance matrix for all beads, or once a "match" is found between the recorded total set of geometrical figures for the bead to be identified and the already stored total set of geometrical figures for all beads, i.e. a "match" between a recorded data set and an already obtained (and stored) data set for the bead in question.

Accordingly, in preferred aspects of the present invention the below-mentioned methods are provided.

A method for measuring at least one property of at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- i) providing a plurality of beads each comprising at least one label,
- ii) providing an apparatus for measuring at least one property of at least one bead according to any of the measuring methods of the invention,
- iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container, and
- v) using the measuring device of the apparatus for measuring at least one property of at least one bead.

A method for analysing data generated by measuring at least one property of at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- i) providing a plurality of beads each comprising at least one label,

- ii) providing an apparatus of the invention for analysing at least one property of at least one bead,
- 5 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- 10 iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
- 15 v) using the measuring device of the apparatus for measuring at least one property of at least one bead, and
- vi) analysing data generated by the measuring device for measuring at least one property of at least one bead.

20 A method for identifying at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- i) providing a plurality of beads each comprising at least one label,
- 25 ii) providing an apparatus of the invention for analysing at least one property of at least one bead,
- 30 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,

- v) using the measuring device of the apparatus for measuring at least one property of at least one bead, and
- 5 vi) using the analysing device for analysing data generated by the measuring device for measuring at least one property of at least one bead, and
- vii) identifying at least one bead of a plurality of beads by analysing the data generated by the measuring device for measuring at least one property of at least one bead.

10

A method for sorting at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

15

- i) providing a plurality of beads each comprising at least one label,
- ii) providing an apparatus according to the invention for sorting at least one bead,
- 20 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,

25

30

- v) using the measuring device of the apparatus for measuring at least one property of at least one bead,
- vi) using the analysing device for analysing data generated by the measuring device for measuring at least one property of at least one bead, and
- vii) sorting the at least one bead of a plurality of beads based on the result of the analysis performed in step vi).

35

A method for sorting at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- 5 i) providing a plurality of beads each comprising at least one label,
- ii) providing an apparatus according to the invention for sorting at least one bead,
- 10 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
- 15 v) using the measuring device of the apparatus for measuring at least one property of at least one bead, and
- 20 vi) using the analysing device for analysing data generated by the measuring device for measuring at least one property of at least one bead,
- vii) identifying at least one bead of a plurality of beads by analysing the data generated by the measuring device for measuring at least one property of at least one bead, and
- 25 viii) sorting the at least one bead of a plurality of beads based on the identification performed in step vii).
- 30

A method for treating at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- 35 i) providing a plurality of beads each comprising at least one label,

- ii) providing an apparatus according to the invention for treating at least one bead,
- 5 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- 10 iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
- 15 v) using the measuring device of the apparatus for measuring at least one property of at least one bead,
- 20 vi) analysing data generated by the measuring device for measuring at least one property of at least one bead, and
- 20 vii) treating at least one bead of a plurality of beads based on the result of the analysis performed in step vi).

A method for treating at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- 25 i) providing a plurality of beads each comprising at least one label
- 30 ii) providing an apparatus according to the invention for treating at least one bead,
- 30 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- 35 iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,

- v) using the measuring device of the apparatus for measuring at least one property of at least one bead, and
- 5 vi) using the analysing device for analysing data generated by the measuring device for measuring at least one property of at least one bead,
- vii) identifying at least one bead of a plurality of beads by analysing the data generated by the measuring device for measuring at least one property of at least one bead, and
- 10 viii) treating at least one bead of a plurality of beads based on the identification obtained in step vii).
- 15 A method for treating at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of
 - i) providing a plurality of beads each comprising at least one label,
 - 20 ii) providing an apparatus according to the invention for treating at least one bead,
 - iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in
 - 25 step ii),
 - iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
 - 30 v) using the measuring device of the apparatus for measuring at least one property of at least one bead,
 - vi) analysing data generated by the measuring device for measuring at least one property of at least one bead,
 - 35

- vii) sorting the at least one bead of a plurality of beads based on the result of the analysis performed in step vi), and
- 5 viii) treating the at least one bead of a plurality of beads having been sorted in step vii).

A method for treating at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

10

- i) providing a plurality of beads each comprising at least one label,
- ii) providing an apparatus according to the invention for treating at least one bead,

15

- iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),

20

- iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,

25

- v) using the measuring device of the apparatus for measuring at least one property of at least one bead, and

-
- vi) using the analysing device for analysing data generated by the measuring device for measuring at least one property of at least one bead,

30

- vii) identifying at least one bead of a plurality of beads by analysing the data generated by the measuring device for measuring at least one property of at least one bead,

35

- viii) sorting the at least one bead of a plurality of beads based on the identification performed in step vii), and

- ix) treating the at least one bead of a plurality of beads having been sorted in step viii).

5 When the invention relates to "encoded" beads, the analysing step of the above methods preferably involves the determination of the coordinates in space of the spatially immobilised microparticles of at least one "encoded" bead, and the generation, for preferably each of the analysed beads, of at least one distance matrix on the basis of said determination of coordinates of spatially immobilised
10 microparticles.

Accordingly, there is provided in one embodiment a method for determining or calculating for an "encoded" bead at least one distance matrix of said bead, preferably by a method comprising the steps of

15

- i) determining for each microparticle of the encoded bead the 2D coordinates in the XZ-plane and in the YZ-plane, thereby generating a first set of data and a second set of data,
- 20 ii) combining the first set of data and the second set of data and thereby obtaining at least one set of 3D coordinates for the microparticles, and
- iii) calculating the distance matrix as the full set of distances between particles for which the set of 3D coordinates is obtained.

25

~~Preferably, only one distance matrix is obtained for each "encoded" bead. When~~
more than one distance matrix is obtained it is preferred to re-calculate the distance matrix in accordance with preferred methods directed to this, as disclosed in more detail herein below in the detailed description of the invention.

30

The above method for determining the distance matrix of the at least one "encoded" bead preferably comprises the further steps of

- iv) comparing the Z-coordinates of different particles within each particle,
35 and

- v) selecting particles wherein the difference between Z-coordinates is less than a predetermined threshold value, delta-Z,
- 5 vi) pair-wise grouping the selected particles according to delta-Z values,
- vii) maintaining the X-coordinate and the Z-coordinate for each of the pair-wise grouped particles, and
- 10 .viii) switching the Y-coordinate between pair-wise grouped particles, thereby obtaining an alternative set of 3D coordinates from which an alternative distance matrix can be calculated.

15 By determining the distance matrix for each bead and store the data as a "finger print" for each bead, it is possible to subsequently identify individual beads in a composition comprising beads for which the distance matrix has already been determined.

20 Accordingly, there is provided a method for identifying individual beads comprising the steps of

- i) determining the set of distance matrices for individual encoded beads according to the methods of the present invention,
- 25 ii) deriving from each of the distance matrices generated in step i) all of the possible geometrical figures, such as triangles, which can be generated by connecting microparticle coordinates with straight lines, and
- iii) recording and storing the set of geometrical figures for each "encoded" bead of the composition to be identified,
- iv) selecting a subset of "encoded" beads,
- 30 v) identifying one or more of the selected "encoded" beads on the basis of a comparison of the set of geometrical figures of said bead(s) with all sets of geometrical figures recorded for the composition in step iii).

35 The geometrical figures are preferably triangles. Preferred methods for deriving geometrical figures in the shape of triangles from methods for distance matrix de-

terminations are listed herein below. The method is based on categorizing and classifying 3D positions from 2 2D projections.

- 5 The objective of the method is to determine 3D coordinates of spatially immobilised microparticles within e.g. a beaded polymer matrix. Accordingly, a large set of unknown 3D locations of spatially immobilised microparticles is rapidly searched though creation of a 3 dimensional table using the length of each side of the spanned triangle as an entry.
- 10 The aim of the search is to create a classification table, based on known distances between particles derived from each orthogonal image pair. Two such image pairs giving rise to the same sets of distances are most likely image pairs of the same bead.
- 15 The number of microparticle to microparticle distances of each encoded bead is large, and does discriminate well among a large set (100000 or more) of encoded beads. Utilizing the constraints of 3D connectivity, the method employ the constraint given by triangles in 3D.
- 20 Each code spans one or more triangles, where each triangle spans a plane. The number of spanned planes is significant less than the number of spanned distances between microparticle sets.
- 25 The aim is to create a lookup table where each entry is the distance between the side length of each triangle, equal to a spanned plane in 3D. A 3D look-up table can be stored in memory, and look-up for matches is performed efficiently.
- 30 Within each table entry three units spanning this particular plane is stored in a linked list. Each image is searched for triangles with the same side length, limiting the number of matches significantly. Each match is then searched individually for full 3D correspondence. The best number of table entries i.e. the unit of each length depends on the set of length differences, but as a general rule, each length unit should contain the variation of side lengths when capturing several image of the same unit.

Accordingly, there is provided a method for identifying an individual bead, b_q , of a plurality of beads, $B = (b_1, b_2, \dots, b_H)$, where $1 \leq q \leq H$, and H being the number of beads, H preferably being less than 10^{17} , such as less than 10^{15} , such as less than 10^{13} , such as less than 10^{11} , such as less than 10^{10} , for example less than 10^9 , such as less than 10^8 , said method comprising the steps of

1. providing a plurality of distance encoded beads, B ,
2. obtaining one orthogonal pair of images, $(I_{h,x,z}, I_{h,y,z})$, of each bead, b_h ,
where $h = 1, 2, \dots, H$, of said plurality of distance encoded beads, B ,
3. deriving from each of said orthogonal pairs of images, $(I_{h,x,z}, I_{h,y,z})$, the set, C_h , of possible sets of three-dimensional microparticle positions represented by x , y , and z image pixel values for each bead, b_h ,

$$C_h = (c_{h,1}, c_{h,2}, \dots, c_{h,E_h}), \text{ where } c_{h,e} = (x_{h,f,e}, y_{h,f,e}, z_{h,f,e}),$$

where $f = 1, 2, \dots, F_h$, and F_h being the number of microparticles of bead b_h , and $e = 1, 2, \dots, E_h$, and E_h being the number of possible sets of three-dimensional microparticle positions for bead b_h ,

4. deriving for each set of possible sets of three-dimensional microparticle positions one distance matrix

$$D_{h,e} = \begin{vmatrix} 0 & d_{h,e,1,2} & d_{h,e,1,3} & \dots & d_{h,e,1,F_h} \\ d_{h,e,2,1} & 0 & d_{h,e,2,3} & \dots & d_{h,e,2,F_h} \\ d_{h,e,3,1} & d_{h,e,3,2} & 0 & \dots & \dots \\ \dots & \dots & \dots & \dots & \dots \\ d_{h,e,F_h,1} & d_{h,e,F_h,2} & \dots & \dots & 0 \end{vmatrix}$$

where $d_{h,e,i,j} = \text{integer}([(x_{h,e,i} - x_{h,e,j})^2 + (y_{h,e,i} - y_{h,e,j})^2 + (z_{h,e,i} - z_{h,e,j})^2]^{1/2})$, where $i = 1, 2, \dots, F_h$, and $j = 1, 2, \dots, F_h$,

5. deriving for each distance matrix, $D_{h,e}$, the full set of derivable triangles, $T_{h,e} = (t_{h,e,1}, t_{h,e,2}, \dots, t_{h,e,G_{h,e}})$, each triangle being represented by its three side length,

$$5 \quad T_{h,e} = [t_{h,e,1}, t_{h,e,2}, \dots, t_{h,e,G_{h,e}}] = [(d_{h,1,2}, d_{h,1,3}, d_{h,2,3}), (d_{h,1,2}, d_{h,1,4}, d_{h,2,4}), \dots, (d_{h,(Fh-2),(Fh-1)}, d_{h,(Fh-2),Fh}, d_{h,(Fh-1),Fh})],$$

$G_{h,e}$ being the total number of derivable triangles from distance matrix, $D_{h,e}$,

- 10 6. generating a subset, U , of all triangles, T , derived for the full set of beads, B , said subset of triangles comprising all different triangles derived for the full set of beads,

$$U = (u_1, u_2, \dots, u_W),$$

15

where $u_i \neq u_j$, for $i \neq j$, and $i = 1, 2, \dots, W$, and $j = 1, 2, \dots, W$, and W being the total number of different triangles derived for the full set of beads, B ,

- 20 7. generating a look-up table, L , that for every triangle, u_r , where $r = 1, 2, \dots, W$, gives the subset, A_r , of the full set of beads, B , for which subset of the full set of beads at least one of its derived sets of triangles comprises u_r ,

$$L = [(u_1, A_1), (u_2, A_2), \dots, (u_W, A_W)],$$

25

8. obtaining one orthogonal pair of images of the bead, b_q , to be identified,
9. deriving from said one orthogonal pair of images the full set of possible sets of three-dimensional microparticle positions,

30

$$C_q = (c_{q,1}, c_{q,2}, \dots, c_{q,E_q}),$$

10. deriving for each of said sets of possible sets of three-dimensional microparticle positions one distance matrix

$$D_{q,e} = \begin{vmatrix} 0 & d_{q,e,1,2} & d_{q,e,1,3} & \dots & d_{q,e,1,F_q} \end{vmatrix}$$

$$\begin{vmatrix} d_{q,e,2,1} & 0 & d_{q,e,2,3} & \dots & d_{q,e,2,Fq} \\ d_{q,e,3,1} & d_{q,e,3,2} & 0 & & \dots \\ \dots & \dots & & \dots & \\ d_{q,e,Fq,1} & d_{q,e,Fq,2} & \dots & & 0 \end{vmatrix}$$

11. deriving for each distance matrix, $D_{q,e}$, the full set of derivable triangles, $T_q = (t_{q,e,1}, t_{q,e,2}, \dots, t_{q,e,Gqe})$, each triangle being represented by its three side length,

5

$$T_q = [t_{q,e,1}, t_{q,e,2}, \dots, t_{q,e,Gqe}] = [(d_{q,1,2}, d_{q,1,3}, d_{q,2,3}), (d_{q,1,2}, d_{q,1,4}, d_{q,2,4}), \dots, (d_{q,(F-2),(F-1)}, d_{q,(F-2),F}, d_{q,(F-1),F})]$$

10

12. finding for each of said triangles of said set of triangles, T_q , derivable from bead b_q the corresponding set, B_q , of subsets of beads according to said look-up table, L , for which at least one of its derived sets of triangles comprises each of said triangles of said set of triangles, T_q , derivable from bead b_q ,

15

13. registering for each of the beads of said subset of beads, B_q , the number of triangles contained in T_q ,

20

14. identifying bead b_q as the bead of said subset of beads, B_q , that has the highest number of triangles contained in T_q .

The apparatus according to the invention and the methods disclosed herein above makes it possible to perform applications such as e.g.:

25

A method for recording individual reaction steps involved in the step-wise synthesis of a chemical compound on an optically detectable bead, said method comprising the steps of

30

- a) spatially immobilizing a plurality of microparticles in each optically detectable bead,
- b) isolating, preferably by automated selection, at least a subset of the spatially encoded beads provided in step a),

- c) recording and storing a distance matrix or a geometrical figure derivable from the distance matrix for each bead, wherein said distance matrix or geometrical figure is preferably generated by any of the methods disclosed herein,
 - 5 d) stepwise synthesising chemical compounds on functional groups present on the encoded beads, wherein the identity of each bead is recorded and stored for each reaction step, and
 - e) obtaining for each bead a record of the individual reaction steps,
- 10 as well as a method for identifying a chemical compound having been synthesised on an optically detectable bead comprising a plurality of spatially immobilised micro-particles comprising at least one label, said method comprising the steps of
- a) performing the recording method cited herein immediately above,
 - 15 b) selecting beads of interest by using an assay or a diagnostic screen selective for the chemical compound having been synthesised on the bead,
 - c) recording the distance matrix for each of the beads selected in step b),
 - 20 d) comparing the distance matrix recorded in step c) with all of the distance matrices recorded and stored in step c) of the recording method cited herein immediately above, thereby obtaining information about the identity of the selected bead,
 - e) identifying for each selected bead the sequence of individual steps
 - 25 having lead to the synthesis of the chemical compound, and
 - f) identifying, based the sequence of individual steps, the chemical structure of the compound.

30 In a further aspect there is provided a method for generating a composition comprising a plurality of encoded beads, said method comprising the steps of

- i) synthesizing a monomer and/or macro-monomer and a crosslinker for polymerisation, and,

- ii) mixing the monomer and/or macro-monomer with microparticles to give an even dispersion of microparticles in the mixture, and
- iii) polymerising the monomer and/or macro-monomer by either i) suspension polymerisation and/or; ii) inverse suspension polymerisation and/or iii) bulk polymerisation followed by granulation and/or iv) droplet polymerisation.

In an even further aspect there is provided a method for generating a composition comprising a plurality of encoded beads and detecting and/or identifying individually identifiable beads, said method comprising the steps of:

- (a) preparing a plurality of beads comprising spatially immobilised microparticles comprising at least one marker;
- (b) detecting and/or quantifying the said markers of each bead and assigning a code, such as the result of a determination of the location of spatially encoded microparticles or vacuoles, for each bead;
- (c) identifying beads having distinctive codes; and optionally
- (d) identifying beads having similar codes; and further optionally
- (e) sorting the beads having distinctive codes from the beads having non-distinctive codes to thereby provide a plurality of encoded beads.

There is also provided the use of such a composition comprising a plurality of encoded beads linked to a bioactive compound for identifying bioactive compound binding partners, and a use of the composition of beads linked to different bioactive compounds for diagnostic purposes, wherein the binding and determination of a predetermined binding partner to a substrate or bioactive compound on the carrier is at least indicative of a positive diagnosis.

Preferred embodiments of the present invention is disclosed in the drawings and in the below detailed description of the invention.

Brief description of the drawings

Fig. 1. illustrates the principle of the present invention: 101 dispersion liquid, 102 bead, 103 capture body, 104 loading section ($P1 > P2$), 105 capture hole, 106

measuring section ($P1 > P2$), 107 means for measuring, 108 treating section ($P1 > P2$), 109 means for treating, 110 unloading section ($P1' < P2'$).

5 Fig. 2. illustrates the principle of using a vacuum container: 201 vacuum container, 202 bead stopper.

Fig. 3. shows an overview of an apparatus: 301 bead suspension reservoir, 302 bead suspension pump, 303 measuring device, 304 Water reservoir, 305 water pump, 306 Outer cylinder of bead handling apparatus, 307 Computer, 308 valve, 10 309 first bead filter, 312 second bead filter, 310 third water pump, 311 second water pump, 313 stepper motor, 314 laser.

Fig. 4. shows a vacuum container and a vacuum container housing: 401 guiding plate holder, 402, 406 wet sections, 403, 405 dry sections, 404 vacuum connecting piece, 407 shaft hole, 408 guiding plate, 409 momentum transfer split, 410 hollow shaft, 411 back plate, 412 - 414 separation plates, 415 capture disc holder, 416 capture-disc. 15

Fig. 5. shows parts of a vacuum container and a vacuum container housing: 501 direction of rotation. 20

Fig. 6. shows sections of an apparatus: 601 excess bead unloading section, 602 sorting section, 603 bead feeding section, 604 excess bead flushing section, 605 water feeding section, 606 unloading section, 607 analysing section. 25

Fig. 7. shows an imaging device for obtaining orthogonal image pairs of beads: 701 fluorescence filter, 702 stepper motor controller, 703 first electric pulse generator, 704 second electric pulse generator, 705 CCD camera, 706 image intensifier, 707 objective. 30

Fig. 8. shows details of a measuring section for obtaining orthogonal image pairs of beads: 801 first microscope, 802 second microscope, 803 second imaging window, 804 illumination window, 805 first imaging window.

Fig. 9. shows an unloading section for removing beads from the capture body by use of a bead stopper: 901 tube, 902 connecting piece.

5 Fig. 10. shows a sorting section for selectively removing beads from the capture body by suction: 1001 connecting piece, 1002 piston, 1003 piston cylinder, 1004 tube.

10 Fig. 11. shows a sorting section for selectively blowing beads from the capture body: 1101 vacuum volume, 1102 vacuum outlet, 1103 high pressure connecting piece, 1104 high pressure volume, 1105 high pressure outlet, 1106 vacuum connecting piece.

15 Fig. 12. shows a sorting section for selectively displacing beads from the capture body with a bead displacing body: 1201 bead displacing body, 1202 bead displacing body container, 1203 bead displacing body guiding channel.

Fig. 13. Demonstration of utility: Sub-sequence of the sequence of capture image pairs showing orthogonal fluorescence image pairs of spatially encoded beads.

20 Fig. 14. Demonstration of utility: Number of beads observed in each capture image pair.

Fig. 15. Demonstration of utility: Images obtained with a 10x magnification, 1.5mm aperture microscope.

25

Definitions

30 **Bead:** A bead is an essentially spherical solid particle with a diameter in the range 0.05mm to 5mm, and more typically in the range 0.1mm to 1mm. Beads can comprise in principle any solid material, but typical materials are silica and polymers, especially cross-linked polymers that can be used for solid phase synthesis, such as cross-linked polystyrene or polyethylene glycol.

35 **Bioactive compound:** Molecules comprising a sequence of building blocks, which includes e.g. L-amino acids, D-amino acids, or synthetic amino acids, such a beta-

amino acids, as well as natural and non-natural nucleotides and polynucleotides, and carbohydrates. It will also be understood that different basis sets of building blocks may be used at successive steps in the synthesis of a compound of the invention.

5

Carrier: Used interchangeably with bead.

10

Code: Used interchangeably with the unique nature of individually identifiable beads, the identification of which resides in the unique spatial distribution of a plurality of microparticles or vacuoles. The code for each bead in principle is unique.

Coordinates: The coordinates are relative spatial coordinates assigned to microparticles in the bead

15

2 D-coordinates: these are coordinates of microparticles in a 2-D projection of the bead along one of three orthogonal axes.

Dispersion: Heterogeneous fluid comprising beads and dispersion liquid.

20

Dispersion liquid: A liquid for dispersing of beads.

Encoded bead: This is bead formed by polymerisation of a monomer mixture comprising a dispersion of microparticles.

25

Essentially: This term signifies that a physical process often yields a result that deviates from the theoretical result expected due to heterogeneity and incomplete control of the process.

30

Essentially mono-disperse size distribution: This indicate that a slight tendency towards inhomogeneous bead size or microparticle size can be expected in any process for preparation of beads and microparticles respectively.

35

Essentially spherical: Any spherical object for which the distance from the gravitational centre to any point on the surface of the object is in the range of from a quarter of the average distance from the gravitational centre to the surface to preferably

less than four times the average distance from the gravitational centre to the surface.

5 Essentially the same diameter: The diameters are never identical since a gaussian distribution of bead sizes is obtained during polymerisation

10 Fluorescently detectable: An unsaturated organic molecule, a complex, an alloy or a transition metal that is excited at one wavelength and, due to electronic structure and heat emission, returns to the ground state with the emission of a photon at a different wavelength, wherein said emission can be detected.

Granulation: Process whereby a solid body is mechanically broken into smaller fragments.

15 HYDRA: PEG-tri-aminoethylamine star copolymer.

Individually detectable: This refers to the separation of beads in a fluidic stream of beads that allow recording of the encoding pattern of each individual bead.

20 PEGA: PEG-acrylamide copolymer (may be alkylated on amide)

25 Photon fluorescence spectroscopy: One photon fluorescence spectroscopy, which is the same as standard fluorescence spectroscopy, is based on the facts that a molecule can be excited by a single photon, and that the excited molecule after an internal process emits a photon with a lower energy than the excitation photon. The energy (the spectrum) as well as the rate of emission is specific for the molecule in its specific environment. Two-photon excitation of fluorescence is based on the principle that two photons of longer wavelength light are simultaneously absorbed by a fluorochrome which would normally be excited by a single photon, with a shorter wavelength. The non-linear optical absorption property of two-photon excitation limits the fluorochrome excitation to the point of focus.

30

POEPOP: Polyethyleneglycol-polyoxypropylene copolymer

Resolution: This term refers to the resolution of a detection method, in a CCD framegrab this is defined by the number of pixels and the optics used to produce the picture, in a scanning laser detection this relates to the cross-section of a laser beam at the point of excitation.

5

Solid phase synthesis: Synthesis where one of several of the reactants forming the target molecule is attached to a solid support e. g. a bead.

10

Spatial position: Position of a bead or microparticle in space defined by Cartesian coordinates

15

Spatially immobilised microparticles: Microparticles which are immobilised in a surrounding polymer matrix in such a way that the individual distances between the immobilised microparticles are constant in a given solvent.

SPOCC: Polymer obtained by ring opening polymerisation of partially or fully 3-methyloxetan-3-ylmethyl alkylated PEG.

20

Swelling: When beads or microparticles or vacuoles are capable of swelling, any physical measurement of the afore-mentioned, including size determinations and volume determinations, refer to measurements conducted for the swelled bead or microparticle or vacuole. Swelling of the beads are for practical reasons measured as the volume of a packed bed of beads swelled in a specific solvent and divided by the dry weight of the beads. The unit is given as ml/g. Typical solvents are water, methanol and dichloromethane, but any suitable solvent may be chosen. When the refractive index of the swelled bead is different from the refractive index of the surrounding solvent the swelled bead will function as an optical lens. When the relative positions of immobilised microparticles inside the swelled beads are determined by optical means this lens effect may give rise to inaccurate determination of the relative positions of the immobilised microparticles. Preferred solvents give rise to as little difference in refractive index between the solvent and the swelled bead as possible. For instance when the polymer matrix comprises cross-linked polyethyleneglycol a one-to-one mixture of ethanol and glycerol gives rise to nearly no refractive index difference.

35

Unique distance matrix: Each bead is uniquely identified by an orientation independent distance matrix describing the relative positions of microparticles within the encoded bead.

5 Uniquely identifiable: Used herein interchangeably with "individually identifiable", i.e. that a single bead can be identified on the basis of the spatial configuration of the microparticles immobilised in the bead. The encoded beads are "individually identifiable" within the limits of statistical probability of occurrence of identical beads and resolution of identification method. In one embodiment, with a practical resolution of
10 1:100 and only 4 encoding microparticles the probability of e. g. selecting two identical beads is 10^{-6} according to Monte-Carlo simulation. A total of $\sim 10^{15}$ different beads may be encoded. More preferably, more than 95%, such as more than 97%, for example about or more than 98%, such as about or more than 99% of all beads will be "individually identifiable" under practical circumstances.

15 Vacuole: Space comprising gaseous or liquid composition of matter, wherein said matter is identifiable by having at least one spectroscopically or optically detectable parameter which distinguishes the vacuole from the bead. Vacuoles may be present in e.g. polymer particles instead of microparticles.

20

Detailed description of the invention

The present invention in a preferred embodiment provides an apparatus comprising devices for bead manipulation and bead measurement.

25

The bead manipulation device preferably comprises a mechanical bead handling apparatus comprising a vacuum container comprising a capture disc for bead manipulation.

30 Once captured onto the capture disc of the vacuum container the beads can be measured, e.g. by using an imaging device capable of generating an image of each bead which can be used for bead identification. The generated images can be stored on a data storage medium and analysed by an analysis device for analysing the results generated by the imaging device. Accordingly, the apparatus can further
35 comprise a device for bead analysis based on the data generated by the imaging

device. In an even further embodiment the apparatus can also comprise a device for bead processing based on the data generated by the imaging device and/or the data generated by the analysing device.

5 The principle of the operation of the apparatus according to the present invention is illustrated in Fig. 1. A bead (102) is dispersed in a dispersion liquid (101) and brought into proximity of the capture body (103), preferably in the form of a disc. The bead is placed firmly on top of a through-going inlet (capture hole) (105) due to the formation of a pressure drop, $P_2 - P_1$, over the inlet.

10

The circular capture body (103) can be manipulated, such as rotated in a step-wise fashion, so that a bead, once it has been firmly fixed onto an inlet, can be transferred to a measuring (imaging) section (106) where one or more properties of the bead can be measured by a suitable device for measuring said one or more properties (107). The measuring section and the measuring device will preferably be stationary, whereas the step-wise motion of the capture disc will transfer - in a step-wise fashion - beads to the measuring section, one bead after the other. Accordingly, the term "section" as used herein will be understood to refer to a particular volume that contains the full track of the capture holes or parts thereof, and through which at least one capture hole can be manipulated. By the "track of the capture holes" is meant the spatial geometry described by the moving capture holes. In the case of a rotating capture disc with capture holes arranged along a circle centered around the axis of rotation of the capture disc, the track of the capture holes is a circle. In preferred embodiments of the present invention a section contains only parts of the track of the capture holes, and preferably all capture holes can be manipulated through a section. In cases where an apparatus of the present invention includes a guiding plate, a section typically is fixed relative to the guiding plate. In cases, where the guiding plate comprises a guiding channel, a section typically refers to a volume including a specific part of the guiding channel. Accordingly, any bead which is measured by the measuring device is positioned in a measuring section. The beads are preferably measured in stationary mode, i.e. in between the step-wise motions which are required in order to rotate the capture disc and transfer beads from one section (e.g. a loading section) to another section (e.g. a measuring section).

35

It is to be understood that the capture body can be of various geometries other than circular and can be manipulated in various ways other than rotation. As an example the capture body can be spherical with capture holes arranged along a circle and can be rotated around an axis perpendicular to the geometrical plane of the capture holes and going through the centre of the circle described by the capture holes.

As a further example a capture body can comprise a rectangular capture surface with a rectangular array of capture holes arranged in rows and columns, and can e.g. be manipulated in directions parallel to the rows and columns of the capture holes. Furthermore the loading and/or unloading can be performed batch wise. As an example, a capture body can be loaded with beads by immersing the capture surface of the capture body into a dispersion of beads, and can be unloaded by immersing the capture surface in dispersion liquid and disconnecting the vacuum body from the vacuum and optionally connecting the vacuum container to a pressurized source of dispersion liquid.

Examples of suitable measuring devices are e.g. imaging devices, such as microscopes, CCD-cameras, confocal microscopes, scanning laser microscopes, non-imaging devices, such as photo-multiplier tubes, and spectrophotometers, such as infrared spectrometers, ultraviolet spectrometers, UV-VIS spectrometers, and Raman spectrometers.

The properties measured can optionally be analysed further by a device suitable for analysing the results generated in the measuring section.

Examples of suitable analysing devices are e.g. computers with computer programs installed. Suitable computer programs can comprise but are not limited to computer programs for image processing, such as finding bright dots, for extracting the three-dimensional positions of bright dots from orthogonal fluorescence image pairs of spatially encoded beads, for metric calculations, such as determining the distance matrix between bright dots from the three-dimensional positions of dots, and for identifying individual spatially encoded beads on the basis of the distance matrix as described elsewhere. Further examples are programs for comparing total bead fluorescence against a preset value, generating a sorting result on the basis of the comparison, for keeping track of the position of beads and their associated sorting results, and for controlling an actuator of an optional sorting section of an apparatus of

the present invention. Furthermore, computer programs can control the means for treating a bead in one or more optional treating sections of the present invention, such as keeping track of synthesis beads and their individual predetermined building block exposure sequences and control the addition of specific building blocks to said

5 one or more optional treating sections in accordance thereto.

Once a bead has been subjected to a measuring step and a particular property has been measured, and optionally also analysed, the capture body can be further manipulated, such as rotated, preferably in the same orientation as previously, so that a

10 bead having been measured and optionally also analysed, subsequently enters a processing section (108) where the bead can optionally be processed by a suitable processing device (109).

Examples of suitable treating devices are e.g. lasers for etching or bleaching, compartments connected to the treating section by tubes for infusion of chemical and/or

15 biological compounds for performing chemical reactions, heating devices, ultraviolet lasers, or lamps for accelerating a desired chemical reaction. As an example a compound can be added that reacts with a specific chemical group if present in the bead upon the formation of a fluorescent compound, e.g. a short lived fluorescent

20 compound. The presence or absence of the specific chemical group is then determined in a downstream measuring section by total fluorescence measurement.

By bleaching is meant a process whereby the colour and/or fluorescence of a material be reduced or eliminated. As an example a fluorescent and/or colour bead can

25 be given a specific mark for purposes of e.g. keeping track of the bead, by bleaching a certain pattern therein.

By etching is meant a process whereby the microscopic interactions, such as covalent or ionic bonds, Van der Waals forces, hydrogen bonds, and the like, that keep

30 the microscopic entities of a solid material together are eliminated, whereby the material deteriorates. As an example a laser can etch one or more through-going holes in a bead for improved access of large molecules to the core of the bead.

By chemical reaction is meant a process that breaks existing chemical bonds, such

35 as covalent bonds, ionic bonds, or hydrogen bonds, and forms new chemical bonds

within a given chemical compound. As an example chemical compounds with a desired structure can be synthesised on beads for solid phase synthesis, so-called synthesis beads, by exposing the beads to building blocks in a specified sequence. As an example the treating device can comprise a plurality of compartments comprising chemical building blocks said compartments being connected to the treating section by at least one tube for diverting individual chemical building blocks to the treating section, such that specific beads can be exposed to specific building blocks in the treating section.

By acceleration of a chemical reaction is meant a process whereby the reaction rate of a chemical reaction is increased. One example of acceleration is initiation, which is a process that increases a specific chemical reaction rate by orders of magnitude without considerably influencing the reaction rate of other chemical reactions. As an example polymer beads comprising carbon-carbon double bonds, such as present in vinyl groups, can be cross-linked by exposure to ultraviolet irradiation.

In a similar and still further step of operating the capture body, the bead can be transported to an unloading section (110) by suitable manipulation of the capture body. The bead in question can be removed from the capture body e.g. by reversing the pressure drop having been exerted during the aforementioned steps, i.e. by reversing - once the bead enters the unloading section - the pressure drop $P_2' - P_1'$ over the inlet to which the bead has been attached during the above-mentioned operations.

The bead sorting and imaging apparatus described in principle above allows a fast and reliable sorting, imaging and identification of a plurality of polymer beads. Using the bead sorting apparatus disclosed herein it is possible to perform methods enabling an imaging in a single hour of as many as more than 10.000 beads, such as more than 20.000 beads, such as at least 30.000 beads, such as at least 36.000 beads, such as at least 76.000 beads per hour, with imaging exposure times of about 1/20 second or less. Imaging exposure times in this range are orders of magnitudes longer than the approximately 10 microseconds exposure times allowed for by a purely fluid dynamics based systems.

Furthermore, the sensor for detecting the coming of a bead, which is an essential component of the purely fluid dynamics based system, is rendered superfluous by the present invention due to the accurate mechanical control of the capture body being operated by a stepper motor.

5

Fig. 1 discloses the principle of attaching a bead to a through-going inlet of a capture disc and transferring the bead to certain (stationary) "utility sections" by rotating the disc. In a preferred embodiment of the present invention, as illustrated in Fig. 9, the capture body forms part of a (capture) vacuum container (903) connected to a vacuum so that an essentially constant pressure, P_2 , can be maintained inside the capture vacuum container throughout the operation of the apparatus. The capture vacuum container ensures that the capture body surface can be moved freely around a central axis with only a minimum of friction.

10

15

The vacuum container comprises a first (outer) surface onto which beads can be captured, and through going inlets extending from the first surface to a second (inner) surface.

20

The captured beads can be transferred between different "utility sections" - defined by fixed positions occupied by different beads over time - when the vacuum container is rotated around a central axis. By "utility sections" is meant sections such as e.g. loading sections, measuring sections, analysing sections, processing sections, and unloading sections.

25

The beads can finally be removed from the capture vacuum container at an unloading section (110) by rotating the capture vacuum container so that a bead on the first surface is contacted by a bead stopper (202) which forces the bead away from the first surface of the capture vacuum container. The use of a bead stopper eliminates the need for supplying a strong vacuum near the first surface of the capture vacuum container at the unloading section.

30

35

In one aspect of the invention there is provided a vacuum container comprising a) a circular capture disc comprising a plurality of through-going inlets, b) a circular capture disc support supporting the capture disc at a distal end thereof (at the perimeter) and being connected at a proximal end (at the central axis) of the capture disc to

- c) a hollow shaft, wherein the hollow shaft is preferably fitted with a shaft hole so that a vacuum (i.e. a pressure below 1 bar) can be applied to the interior of the vacuum container, and d) a stepper motor operably linked to a momentum transfer split for transferring the momentum from the stepper motor to the vacuum container,
- 5 thereby causing the vacuum container to rotate in a controlled, step-wise fashion.

In the above description the pressure drop over the capture disc is generated by applying a vacuum to the interior of the vacuum body. It is to be understood though that the pressure drop can be generated in other ways. One alternative is to apply a pressure to the dispersion liquid contacting the outer surface of the capture disc by

10 e.g. connecting a pressurized dispersion liquid reservoir thereto. A further alternative is to apply a vacuum to the inside of the vacuum container and at the same time to apply a pressure to the dispersion liquid on the outside.

15 The above-described vacuum container comprising a rotatable capture disc for bead sorting is preferably integrated into an apparatus for bead sorting further comprising the following features

- 20 i) a bead feeding section for diverting beads to the vacuum container of the bead sorting apparatus,
- ii) a loading section for loading beads onto the capture disc of the vacuum container,
- 25 iii) a device for rotating the vacuum container and thereby transferring beads detachably attached to through-going inlets of the capture disc from one location to another location,
- iv) a measuring section for optically measuring at least one property of a bead attached to the capture disc,
- v) an optical measuring device for measuring the at least one bead property,
- 30 vi) an analysing device for analysing and storing the data obtained from measuring the at least one bead property, and
- vii) at least one unloading section for unloading beads from the capture disc of the vacuum container.

35 An overview of the apparatus for bead sorting according to the invention is described herein below with reference to Fig. 3.

Overview of bead sorting apparatus

5 The following paragraphs describe with reference to Fig. 3 the best mode for operating the bead sorting apparatus of the invention as well as the methods for bead sorting which are thereby enabled.

Fig. 3 illustrates a bead suspension reservoir (301) in which beads to be sorted can be suspended in water by a sufficiently rapid stirring. The beads can be diverted to
10 the bead suspension reservoir e.g. following a solid phase synthesis step. A bead suspension pump (302) supplies the suspended beads from the bead suspension reservoir to the bead feeding section of the apparatus. Any non-captured beads can be re-circulated to the bead suspension reservoir from the excess bead unloading section.

15 The water reservoir (304) diverts aqueous liquid such as water to the water feeding section of the apparatus. The water in the water reservoir preferably has a free surface for ensuring a water pressure inside the guiding channel of approximately 1 bar.

20 The first water pump (305) is connected to the vacuum connecting piece of the apparatus for maintaining a vacuum inside the vacuum container. The vacuum ensures that beads remain firmly fixed to the capture disc of the vacuum container during transfer to at least one or more of a measuring section and an analysing section. The transfer occurs when beads having been fixed to the capture disc of the
25 vacuum container by the applied vacuum pressure are rotated in step-wise motions by the action of a stepper motor operated by a computer (307).

30 An illumination source (314) positioned in the measuring section for illuminating a bead in the measuring section preferably comprises at least one laser. Once a bead has been illuminated by the laser, the image of the bead thereby obtained is recorded by an imaging device (303) and optionally also stored on a data storage medium in a computer (307).

The computer (307), or a set of different computers, can be used for controlling the stepper motor, as well as controlling the imaging device for imaging beads, storing imaging data, analysing the images obtained, and controlling the piston valve at the unloading section.

5

The imaging device (303) preferably comprises two CCD cameras. Each CCD camera is equipped with an image intensifier, a microscope objective for simultaneous imaging of a bead inside the measuring section, and a fluorescence filter for blocking the laser light and for transmitting fluorescence emission from the beads.

10

The images obtained are preferably stored on a data storage medium in a computer and analysed with regard to total number of fluorescent microparticles embedded in each bead. An analysis result is generated for each bead stating the number of fluorescence microparticle in the bead. A sorting result is subsequently generated for each bead by comparing the analysis result to a specified interval so that if the analysis result lies within the interval the sorting result = 1, whereas, if the analysis result lies outside of the interval, the sorting result = 0,

15

20

Each bead, its associated sorting result, and its position on the capture disc from the measuring section and forward is recorded by a computer.

At the sorting section each bead is removed from the disc and transferred to the second bead filter (309) if its associated sorting result = 1, whereas the bead is left on the capture disc if its analysis result = 0,

25

At the unloading section all beads that were not removed at the sorting section are removed from the capture disc and transferred to the first bead filter (312),

30

In this way, at least two fractions of beads are generated, one fraction containing beads with a number of fluorescent microparticles within the specified interval, and one fraction containing beads with a number of fluorescent microparticles outside the specified interval.

35

A third water pump (310) generates a vacuum for removing beads from the capture disc at a sorting section. The removal of beads is ensured by the actions of a piston

valve (308) connecting the vacuum of the third water pump to the sorting section. A second filter (309) can retain beads removed at the sorting section. A second water pump (311) generates a vacuum for removing beads not removed at the unloading section from the capture disc at the unloading section.

5

Operation of the bead sorting apparatus

The below sections describe the actions routinely performed when operating the above-described apparatus.

10

Initially, the computer (307), the CCD-cameras, and the image intensifiers are turned on. The valve (308) is closed and the water reservoir (304) is filled with demineralised water. The first water pump (304) is activated, whereby a pressure of less than 0.5 bar is maintained inside the vacuum container. The third water pump (310) is started whereby a pressure of 0.1 bar is maintained downstream from the second bead filter (309). The second water pump (311) is started whereby a pressure of 0.1 bar is maintained downstream from the first bead filter (312).

15

The laser (314) is turned on whereby the measuring section is illuminated. A computer program is run which controls the stepper motor (313), the valve (308), and the CCD-cameras, and the image intensifiers so that the vacuum body is rotated in a step-wise fashion and so that one pair of orthogonal images are obtained, stored, and analysed in the computer every time a capture hole is momentarily at rest in the imaging section. The valve (308) is controlled on the basis of the result of the analysis of the images, thereby enabling sorting of the beads.

20

25

Vacuum container

A detailed illustration of one preferred embodiment of a vacuum container and a vacuum container housing is provided in Fig. 4. The vacuum container according to this embodiment preferably comprises

30

- a) a circular capture disc (416) comprising a plurality of a through going inlets (105) forming a circle close to the perimeter of the capture disc,

35

5 such as e.g. a 100mm diameter and 5mm thick capture disc with e.g. about 100 cylindrical or conically shaped through-going inlets (capture holes) having the same diameter or different diameters through the disc (depending on whether the inlet is a cylinder or a cone). When being conical in shape, the through going inlets can have a diameter of about 0.2mm at the first side of the disc, and a diameter of about 2.0mm at the second side of the disc. The capture holes can e.g. be arranged along an 80mm diameter circle 10mm from the perimeter of the disc,

10 b) a circular capture disc support (415),

preferably having an outer diameter of about 100mm, supporting the capture disc (416) at a distal end and being connected at a proximal end to

15 c) a hollow shaft (410),

preferably a hollow stainless steel shaft, wherein the shaft can have an outer diameter of about 6mm and an inner diameter of about 4mm, wherein the hollow shaft (410) is preferably fitted with a shaft hole (407) so that a vacuum (i.e. a pressure below 1 bar) can be applied to the interior of the vacuum container,

20

Capture disc holder of vacuum container

25 A cylindrical capture disc holder (415) makes it possible to apply a pressure drop over the disc. The capture disc holder (415) can have an outer diameter of e.g. 100mm. The capture disc holder can support the disc at the perimeter of the disc while the central section of the capture disc holder is supported by a hollow shaft (410), preferably a hollow stainless steel shaft, through which shaft one can apply a first vacuum of less than e.g. 0.5bar. The hollow stainless steel shaft (410) can

30 have an outer diameter of about 6mm and an inner diameter of about 4mm.

Vacuum container housing

35

The vacuum container housing according to this embodiment serves the purposes of containing the dispersion liquid, holding the vacuum container in place, connecting the inside of the vacuum container to a vacuum, and transferring rotational momentum to the vacuum container.

5

The vacuum container housing in one embodiment preferably comprises

- a) an outer cylinder (303) for containing the dispersion liquid,
- b) a vacuum pump connecting piece (404) therein for connecting the wet section (406) of the vacuum container housing to a suitable pump, such as e.g. a water pump for maintaining and controlling the vacuum inside the vacuum container,
- c) a guiding plate (408) as illustrated in Fig. 4, and optionally
- d) a momentum transfer split (409) operably linked to a stepper motor (313) for transferring the momentum from the stepper motor to the vacuum container thereby causing the vacuum container to rotate in a controlled step-wise fashion.

10

15

20

A suitable means for stepwise rotating the disc is a stepper motor with e.g. 200 steps per round mounted on the shaft and arranged so that the motor causes the disc and the container to rotate around a common central axis. In this way, the capture holes are moved along a planar, circular path. The stepper motor comprises an electronic stepper motor controller for controlling the motion of the stepper motor.

25

30

The guiding plate preferably comprises a circular guiding channel, such as e.g. a 1mm deep circular guiding channel having an outer diameter of e.g. about 81.5mm and an inner diameter of e.g. about 78.5mm carved therein, said guiding plate further comprising a number of through-going inlets for supplying and retracting beads, or more preferably dispersion liquid comprising beads, to and from the guiding channel of the guiding plate, said guiding plate preferably further comprising a plurality of transparent sections or windows allowing illuminating and imaging of the beads, wherein the guiding plate is optionally attached to a guiding plate holder (401) for holding the guiding plate.

The at least one transparent section or window is preferably made from a material which does not absorb the illumination light from the source of illumination and/or the emission light emitted from the particles, preferably quartz or a suitable transparent polymer.

5

The vacuum container and vacuum container housing can be constructed in different ways in order to serve the purpose of transferring beads from one section of utility to another. The construction is not critical as long as it permits the container to function according to the principles of the invention. In Fig. 4 is illustrated a design based on a circular back plate (411), such as a circular stainless steel back plate (411), and a plurality of separation plates (412 - 414), such as circular stainless steel separation plates for separating dry sections (403, 405) from the wet sections (402, 406). The separation plates are preferably fitted with central through-going holes equipped with sealings for keeping the liquid from leaking from the wet sections to the dry sections. The plates are preferably further equipped with low friction bearings for ensuring low-friction and non-wobbling rotation of the shaft.

The individual components of a vacuum container comprising a) a circular capture disc comprising a plurality of a through going inlets forming a circle close to the perimeter of the capture disc, b) a circular capture disc support supporting the capture disc at a distal end and being connected at a proximal end to c) a hollow shaft preferably fitted with a shaft hole so that a vacuum can be applied to the interior of the vacuum container, and of a vacuum container housing comprising d) a stepper motor operably linked to a momentum transfer split for transferring the momentum from the stepper motor to the vacuum container thereby causing the vacuum container to rotate in a controlled step-wise fashion, and optionally further components, is disclosed in the following.

Fig. 5 illustrates detailed side and top views of a capture disc of the vacuum container and vacuum container housing illustrated in Fig. 4.

The capture body (416) can comprise e.g. a 100mm diameter and 5mm thick plastic disc comprising two planar, circular sides, a first and a second side. The capture holes (105) can comprise any suitable number of through-going inlets, such as e.g. about 100 cylindrical through-going inlets of varying diameter, the diameter being

e.g. about 0.2mm at the first side of the disc (to which the beads are attached), and the diameter being e.g. about 2.0mm at the second side of the disc. In a preferred embodiment the number steps of the stepper motor is divisible by the number of capture holes, and the capture holes are equidistantly spaced, whereby it is obtained that all capture holes are at rest at the exact same positions.

The capture holes (through-going inlets) can e.g. be arranged along an 80mm diameter circle positioned about 10mm from the perimeter of the disc.

10 Utility sections of the apparatus for bead sorting

Loading section

The loading section (104) can comprise a volume of e.g. at least 1mm^3 , said volume being confined in an essentially cylindrical space extending from the surface of the first side of the disc and into the dispersion liquid and positioned at the circle described by the capture holes.

In a preferred embodiment the loading section comprises an elongated volume extending along the track of the capture holes for a distance corresponding to several times the average distance between neighbouring capture holes, such that at all times during the operation of the apparatus multiple capture holes, such as at least ten capture holes, are contained in the loading section, whereby the probability of a capture hole capturing a bead while traversing the loading section is increased compared to the case of a loading section containing only one capture hole at a time. In order to further increase the chance of capture holes capturing a bead inside the loading section the number of mobile beads in the loading section should be maximised. By "mobile beads" is meant beads that can be captured by an empty passing capture hole by action of the flow of dispersion liquid towards the capture hole. At low numbers of beads (the bead number) the number of mobile beads (the mobile bead number) increases with increasing bead number up to a certain critical bead number, the clogging bead number, where beads become immobilised by friction and adhesion interactions with neighbouring beads and with the solid surfaces surrounding the loading section. Hence, the bead number in the loading section should be kept just below the clogging bead number. It should be

noticed then, that the clogging bead number depends on various parameters, such as e.g. bead size, bead composition, dispersion liquid composition, dispersion liquid flow velocity, and loading section geometry. To avoid the bead capture rate from becoming the throughput limiting factor in the operation of the apparatus the mobile bead number should be maximised.

As already mentioned, the mobile bead number can be increased by increasing the clogging bead number. As an example this can be achieved by inducing static flow in the loading section, e.g. by stirring, such as stirring with a magnetic stirrer, or by infusing dispersion liquid at one end of the loading section and withdrawing dispersion liquid from the distal end of the loading section. In many cases a more pronounced effect can be achieved by inducing an alternating flow field.

A further obvious way of increasing the mobile bead number is to extend the loading section along the track of the capture holes. Obviously the length of the loading section is limited by the total length of the track of the moving capture holes. In the case of a circular capture hole track the total length of the capture hole track can be increased by increasing the diameter of the capture hole track. In cases where the capture holes are arranged along a circle in a capture disc the total length of the capture hole track can be increased by increasing the diameter of the capture disc. If for instance a 500mm capture disc be used, a total of up to 500 capture holes can be arranged along a circle with 3mm between neighbouring capture holes. The loading section can then be designed such that at least 400 capture holes be present in the loading section at all times during operation. This significantly increases the probability of a capture hole capturing a bead in the loading section compared to the case of a 100mm diameter capture disc with the same inter-capture hole distance.

The unloading section (110) preferably also comprises an at least 1mm³ essentially cylindrical space extending from the surface of the first side of the disc and into the dispersion liquid and positioned at the circle described by the capture holes at e.g. 180° from the loading section.

Unloading section

Once the beads have passed through the measuring section (106) and an analysis section (607), they need to be unloaded from the capture disc. In the embodiment disclosed in Fig. 4 one unloading section (606) is illustrated, which serves to unload beads. A detailed disclosure of a preferred embodiment of the unloading section is provided in Fig. 9. Also, an unloading section (110) is illustrated in Fig. 5 opposite to the loading section (104) in the illustrated embodiment.

When a bead enters the unloading section it is firmly fixed onto a through-going inlet of the disc due to the pressure drop over the inlet. Any type of pressure controlling equipment can be used in an unloading section for normalising the vacuum or, preferably, for generating a reverse pressure drop over the part of the disc which at any one time is positioned in the unloading section. The pressure controlling equipment can e.g. comprise a pipe for unloading beads, preferably of stainless steel, having a length of e.g. about 20mm and an inner diameter of e.g. about 1.1mm.

The pipe comprises a first end and a second end, and the pipe is preferably positioned perpendicular to the first side of capture disc, the first end of the pipe pointing towards the first side of the disc and being positioned about 1mm from the capture disc and entering the unloading section, the second end of the pipe being connected to a second vacuum of 0.1bar, whereby a reverse pressure drop, $P_1' - P_2' = -0.4\text{bar}$, is generated over the capture disc at the unloading section,

The measuring section can be defined by a 1mm^3 spherical space extending from the surface of the first side of the disc and into the dispersion liquid. The measuring section (106) for measuring at least one bead property, and optionally also analysing the data resulting from the measuring, is preferably positioned on the circle perimeter defined by the capture holes at an angle of 90° from both the loading section (104) and the unloading section.

Accordingly, beads are transferred from the loading section via the measuring section to the unloading section. The measuring section is so positioned that the step-wise rotation of the disc causes a through-going inlet (capture hole) to which a bead is fixed to be stationary (i.e. not moving) when the bead fixed to the through-going inlet passes the measuring section. This ensures that individual beads can be

measured in "stationary mode" during the movements generated by the stepper motor.

5 The apparatus for measuring individual beads comprises a light source for illuminating a single bead when the bead is positioned in the measuring section, and one or more sets of objectives and cameras for obtaining images of the beads from one or more angles. This is further illustrated in Fig. 8.

10 The different sections of the bead sorting apparatus is illustrated in more detail in Fig. 6. It will be understood that the term "section" can refer to a part of the capture disc when said part is positioned in a predetermined location with respect to e.g. the stationary devices used for measuring, analysing and the like, including a predetermined stationary location, as the disc is rotated in a step-wise fashion during the operation of the apparatus.

15 With reference to Fig. 6, the sections of utility can be e.g. a loading section (104), a measuring section (106), an analysis section (607), and at least one unloading section (602, 606).

20 For example, the through-going capture inlet n will initially be located in the loading section for being loaded with a bead.

25 As the stepper motor rotates the disc a single step, the through-going capture inlet n will be rotated one step in the orientation of the rotation. At the same time, the through-going capture inlet n+1 will be located in the loading section for being loaded with a bead.

30 As the stepper motor rotates the disc another single step, the through-going capture inlet n+1 will be rotated one step in the orientation of the rotation. At the same time, the through-going capture inlet n+2 will be located in the loading section for being loaded with a bead, and so on.

As the stepper motor rotates the disc step-wise, the through-going capture inlet n will be rotated a plurality of steps in the orientation of the rotation. After a certain

number of step-wise rotations, the through-going capture inlet n will have been rotated so many steps that it will be positioned in the measuring section.

5 In the embodiment of the capture disc disclosed in Fig. 6, the beads having been dispersed in a dispersion liquid are brought into contact with the capture disc at a bead feeding section (603) where the dispersed beads are diverted to the capture disc loading section (104), preferably via a guiding channel as illustrated in Fig. 6.

10 In the loading section (104) the beads are sucked onto the through-going capture inlets of the capture disc, and non-captured beads are removed in an excess bead unloading section (601).

15 There is also provided a liquid feeding section (605) in which e.g. water can be diverted to the guiding channel generating a flow of water in a direction away from the water feeding section. Also provided in this embodiment is an excess bead flushing section (604) for flushing any non-captured beads away from the flushing section and towards the bead feeding section, whereby it is obtained that only captured beads proceed from the excess bead flushing section towards the measuring section. Examples of non-captured beads include non-captured beads sticking to captured beads, non-captured beads sticking to the surface of the capture disc, non-captured beads sticking to the walls of the guiding channel, and freely flowing non-captured beads. In this way it is ensured that non-captured beads do not pass the water feeding section.

25 Measuring section

In the measuring section (106) a measuring device enables the generation of an appropriate imaging of the beads.

30 Figs. 7 illustrates one preferred embodiment for imaging of beads. In this embodiment, the measuring device comprises a stepper motor (313), a stepper motor controller (702), a first electric pulse generator (703), a second electric pulse generator (704), a laser (313), two imaging systems, each comprising a CCD camera (705), an image intensifier (706), an objective (707), a fluorescence filter (701).

35

Fig 8 illustrates in detail the set-up of the measuring section according to one embodiment of the present invention.

5 A first and a second through-going cylindrical imaging hole of a diameter of about 2mm in the guiding plate is inclined 45° to the plane surface of the guiding plate and arranged perpendicular to each other and further arranged so that their axis cross at a point on the surface of the capture disc at the circle described by the capture holes. This ensures that a bead can be simultaneously imaged from two orthogonal directions through the imaging holes.

10 First and a second imaging windows are illustrated (801, 803), as well as a through-going illumination hole of a diameter of about 1.5mm in the guiding plate and perpendicular to the plane surface of the guiding plate and positioned so that the axis of the illumination hole goes through the point at which the axis of the imaging holes cross, whereby a bead can be simultaneously illuminated and imaged.

15 The illumination window (804) preferably comprises a polished glass cylinder of a diameter of about 1.5mm and a length about 2mm inserted, and optionally fixed with a glue, in the illumination hole, whereby the illumination hole is sealed.

20 The measuring device is described in more detail herein below

25 In preferred embodiments of the present invention it is desirable to read distance-encoded synthesis beads at a high rate, i.e. reading at least 10000 spatially encoded beads per hour, preferably more than 20000 spatially encoded beads per hour, such as more than 30000 spatially encoded beads per hour.

30 The reading of encoded bead must result in data from which the distance matrix of individual spatially encoded beads can be extracted by the device analysing the data generated by the measuring device.

35 In one preferred embodiment there is provided a device for measuring (recording) and storing at least one image of at least one spatially encoded bead comprising a plurality of beads, said device preferably comprising i) at least one source of illumination, preferably a continuous wave laser, ii) at least one pulse generator, iii) at

least one image intensifier, and iv) at least one CCD camera, such as two or more CCD cameras.

5 The measuring device can comprise or be linked to a computer running a program for calculation of distance matrices for individual spatially encoded beads as disclosed herein below.

10 The photo-sensor for detecting entry of an encoded bead into the imaging section of the flow cell preferably comprises an optical objective for focussing said imaging section of said flow cell onto the photo-sensitive area of said photo-sensor. The optical objective of said photo-sensor preferably comprises a fluorescence filter for blocking the light of said laser, and the fluorescence filter is capable of transmitting the fluorescence emission from an individual encoded bead.

15 The CCD-camera(s) for recording at least one fluorescence image of an individual encoded bead preferably comprises a gated image intensifier for amplifying the fluorescence emission from the encoded bead. Each of the gated image intensifiers preferably comprises an optical objective for focussing said imaging section of said flow cell onto the photo-sensitive area of each image intensifier. Each optical objective preferably comprises a fluorescence filter for blocking the light of said laser, and
20 the fluorescence filter is capable of transmitting the fluorescence emission from an individual encoded bead.

25 The pulse generator can be an electrical square wave pulse generator for triggering said two or more CCD-cameras and/or said two or more image intensifiers.

30 It is preferred that the device further comprises an image storage system comprising one or more of the following elements: A framegrabber for recording the images from said two or more CCD-cameras, an electronic memory-device for storing said images from said framegrabber, a program code for controlling said electronic memory-device, and a computer for integrating said framegrabber and said electronic memory device and for executing said program code.

The bead measuring device can be used in methods for recording and optionally also storing images of individual spatially encoded beads. This is achieved by performing e.g. a method comprising the steps of

- 5 1. Dispersing spatially encoded beads in a dispersion liquid,
2. Diverting the dispersion of spatially encoded beads to the capture disc of the vacuum container,
3. Rotating the capture disc and transferring the beads one by one to the measuring section,
- 10 4. Recording one pair of orthogonal fluorescence images of each spatially encoded bead, and
5. Optionally storing the images of each spatially encoded bead on a computer,

The measuring device preferably comprises:

- 15 1. A continuous wave laser for illuminating said imaging section of the measuring device.
2. Two or more video-cameras for obtaining fluorescence images of an encoded bead, each one of said two or more video-cameras being equipped
- 20 with one gated image intensifier for amplifying the fluorescence emission from the encoded bead, and each one of said image intensifiers being equipped with one optical objective for focussing said imaging section of said flow cell onto the photo-sensitive area of each image intensifier, and each optical objective being equipped with one fluorescence filter for blocking the
- 25 light of said laser, and said fluorescence filter transmitting the fluorescence emission from the encoded bead
3. An electrical square wave pulse generator for triggering said two or more cameras and said two or more image intensifiers
- 30 The device preferably also comprises an electrical cable connecting the output terminal of said photo-sensor to the trigger input of said pulse generator whereby it is obtained that a square wave pulse is generated when the output voltage of said photo-sensor is above the trigger-voltage of said pulse generator. Also provided are electrical cables for connecting the output terminal of said
- 35 pulse generator to the input terminals of said two or more video-cameras and

said two or more image intensifiers, whereby it is obtained that two simultaneous images are recorded with said two cameras.

5 The optical objectives of the image intensifiers can optionally comprise means for increasing the depth of field such as e.g. any one or more of

1. phaseplates such as waveplates such as cubic phase modulation masks placed in the lens system [E. Ben-Eliezer, Z. Zalevsky, E. Marom, N. Konforti, J. Opt. A: Pure Appl. Opt. 5 (2003) S164-S169], [E. R. Dowski and W.T. Cathey, Applied Optics, vol. 34, no 11, pp. 1859-1866, April, 1995],
- 10 2. high depth of field endoscopes, such as 1mm perceived depth of field endoscopes, such as 1mm perceived depth of field rigid endoscopes,
3. a duplicate set of two or more cameras equipped with image intensifiers, optical objectives, and fluorescence filters, each one of said cameras of said
15 duplicate set of cameras being positioned opposite each one of said cameras of said two or more cameras, each of said cameras of said duplicate set of two or more cameras having a different focus plane than said opposite camera of said two or more cameras, whereby it is obtained that a duplicate set of images are obtained with different focal planes, and a microbead
20 which are far from the focal plane of any one of said two or more cameras will be close to the focal plane of said opposite camera of said duplicate set of two or more cameras and vice versa, and therefore will appear sharply in one of the images obtained with two opposite cameras, or
4. means for varying the aperture placed in the lens system, whereby the depth
25 of field can be increased by decreasing the aperture but whereby at the same time the light sensitivity is decreased, thus whereby the best compromise between depth of field and light sensitivity can be obtained, such as means for varying the aperture in the range from 10mm to 2mm, whereby the perceived depth of field in an image of field of view of 1.2mm x 1.5mm
30 can be varied in the range from about 0.1mm to 0.8mm when a CCD camera equipped with an image intensifier and a conventional 10x magnification microscope objective is used.

The image storage system preferably comprises:
35

1. A framegrabber for recording the images from said two or more cameras
 2. An electronic memory-device for storing said images from said framegrabber
 3. A program code for controlling said electronic memory-device
 4. A computer for integrating said framegrabber and said electronic memory
- 5 device and for executing said program code, and

The image storage system can further comprise means for digital decoding of images obtained with the use of

- 10 1. phaseplates, as described above, in order to generate sharper images,
2. a sufficiently high depth of field endoscopes, as described above, and
3. opposing cameras, whereby higher depth of field images can be reconstructed.

15 The continuous wave laser can e.g. be a BluePoint series supplied by Rainbow Photonics, the Cobolt Blue series supplied by Cobolt AB, or the Blue CrystaLaser series-supplied-by-Crysta Laser of wavelength 473 nm for illuminating the imaging section of said central section of said flow cell and for controlling the position and geometry of said imaging section of said central section of said flow cell,

20 The CCD cameras can e.g. be a CPL high speed series supplied by Canadian Photonics Labs Inc., the SR-CMOS series supplied by Vision Research, or the SVS series supplied by SVS-Vistek GmbH, a first and a second CCD camera, and be positioned perpendicular to each other and aligned relative to said imaging section

25 of said central section of said flow cell in such a way that the CCD chips of said CCD cameras run parallel to the flat surfaces of said central section of said flow cell and so that said imaging section of said central section of said flow cell can be projected onto said two CCD chips of said two CCD cameras by optical means described below.

30 The image intensifiers can e.g. be supplied by Hamamatsu or the Proxifier series supplied by Proxitronic, or the GPM series supplied by Photonicstech, and connected to said two CCD cameras for amplifying the optical signal emitted from the illuminated section of said imaging section of said flow cell.

Two objectives (such as the MS-50 supplied by MEIJI TECHNO or the QM-100 supplied by Questar) are preferably connected to said first and second CCD cameras whereby the optical signal from said imaging section is focused onto said two CCD chips of said two CCD cameras.

5

Two optical filters (emission band pass filters, e.g. type 528-50 supplied by Ferroperm or Chroma) are connected to the above-mentioned objectives for blocking the laser light and transferring the fluorescence emission from the fluorescent spatially immobilised microparticles of the encoded beads described elsewhere,

10

An electronic pulse generator, e.g. of the type TGP110 supplied by Thurlby Thanders instruments, TTi, can preferably be used for generating a pulse for simultaneous triggering said two cameras and said two image intensifiers, whereby simultaneous pairs of images can be recorded with said two CCD cameras.

15

A framegrabber, e.g. of the type GrabLink Expert supplied by Eurecard, can be connected to the output terminals of said two CCD cameras for transferring the electronic signals from said two CCD cameras to a computer, e.g. a personal computer (such as e.g. a PC type Pentium 4 supplied by Unit-One electronics) connected to the output terminals of said framegrabber for electronically storing the images from said two CCD cameras.

20

As an alternative to the use of CCD cameras any suitable digital camera can be used, e.g., C-MOS cameras.

25

As an alternative to the use of image intensifiers connected to CCD cameras, on-chip multiplication gain cameras can also be used.

Analysis section

30

Once the beads have passed through the measuring section (106), they are transferred by further step-wise rotation to an analysis section (607).

In the analysis section (607) the images resulting from the imaging of captured beads in the imaging section are being analysed at the same time as the beads are being transferred in a step-wise fashion towards the one unloading section (606).

- 5 A variety of data processing methods can be carried out when analysing the data generated by the measuring of the at least one bead property by the measuring device in the measuring section. Examples of data processing methods and their results are described in detail herein below.

10 Analysing bead properties by distance matrix determination

In one embodiment, the spatial immobilisation of the plurality of microparticles in each bead is essentially unique for each bead. The spatial positions of microparticles in each bead can be defined by sets of coordinates, (x,y,z) of microparticle
 15 centers of said microparticles, relative to one reference point of the detection. Furthermore, the relative positions in space of centers (x,y,z) of immobilised microparticles can be detected based on recording of 2D-projections of the microparticles.

In one embodiment, three 2D-projections are recorded along 3 orthogonal axis x , y
 20 and z to generate three sets of 2D-coordinates (y,z) , (x,z) and (x,y) , respectively, from which the 3D-coordinates (x,y,z) of microparticle centers can be derived. A stack of 2D projections can be generated by confocal or focal microscopy to recreate the 3D image matrix of the bead from which the relative microparticle position (x,y,z) in space can be determined.

25 One method for determination of relative microparticle positions within a bead can be based on using focussed scanning lasers for determining the coordinates x , y and z of a microparticle detachably fixed on a capture disc inlet by fast scanning two orthogonally aligned lasers over three cross sections of the bead.

30 Accordingly, it is possible to determine the coordinates x , y and z of a microparticle position by using a single laser and a rotating mirror that via 2 or three geometrically arranged static mirrors reflects the laser beam along 2 or 3 orthogonal axis.

A further method for determination of relative microparticle positions within a bead can be based on phase shifting digital holography, which determines the 3D structure of the interface between the microparticles and the surrounding polymer of the bead based on the reflections of light of said interface [Ichirou Yamaguchi, Jun-ichi Kato, Sohgo Ohta, and Jun Mizuno, 1 December 2001, Vol. 40, No. 34, APPLIED OPTICS], [Etienne Cuhe, Frédéric Bevilacqua, and Christian Depeursinge March 1, 1999 / Vol. 24, No. 5 / OPTICS LETTERS 291].

Accordingly, one method for recording the unique pattern of each encoded bead comprises the steps of recording the relative coordinates of the center of the spatially immobilised microparticles and calculating a distance matrix based on the recorded coordinates. Accordingly, it is possible to convert the relative coordinates into absolute and unique parameters for each bead by generating for each bead a distance matrix of inter microparticle distances.

The coordinates of the microparticles in a bead can be generated in a variety of different ways.

1. A laser or conventional light excitation of the entire bead can be combined with detection along 3 orthogonal axis with three CCD cameras and the three sets of coordinates measured in 2D X,Y; Y,Z and X,Z for each microparticle can be used to correlate the microparticles to give a unique set of parameters XYZ for each immobilised microparticle.
2. A principle of focal or confocal microscopy can be used to obtain a 3D representation of the bead in which the 3 coordinates are the x and y of the microparticle in the a particular picture while the z-coordinate is derived from the focal depth.
3. Using fluorescence labelled microparticles a set of two focussed alternating scanning lasers along three orthogonal axis can excite the fluorophores on a microparticle of a spatially encoded bead located on the capture disc in the measuring section and the fluorescence can be recorded with a photo-sensor equipped with a fluorescence fileter. The coordinates are generated from the three excitation coordinates.

The methods and spatially encoded beads described above can be used to identify single beads out of a very large assembly of beads by rapid decoding at any point of process time. They can furthermore be used in connection with diagnostic kits
5 where a large mixture of beads are used in a fashion similar to that of spatial arrays of e. g. DNA or protease substrates.

When polymer beads encoded with spatially immobilised microparticles are to be identified by the distance matrix between said spatially immobilised microparticles,
10 the relative position of each microparticle must be determined within some acceptable experimental error, such as a general spatial uncertainty of e.g. one microparticle diameter. As a further example two or more sets of 2D projections of microparticles can give rise to more than one set of three-dimensional microparticle positions.

15 To a large extent this can be done by multiple imaging or laser scanning. However, erroneous distance matrices may result in cases where the optical data obtained gives rise to two or more three-dimensional (3D) interpretations. For instance, when encoded beads are viewed from two orthogonal angles corresponding to an x,z-projection and a y,z-projection, a "correspondance problem" arises when two or
20 more spatially immobilised microparticles have the same z-value within the optical accuracy of the equipment. One example of the "correspondance problem" arising from one set of images giving rise to two or more possible 3D-structures is illustrated in Fig. 9.

25 Below is provided three non-limiting examples of conceivable solutions to the "correspondence problem"

Solution 1: Focal depth evaluation

30 Spatially immobilised microparticles positioned at the focal plane of the imaging objective appear as sharp and intense bright spots, whereas microparticles positioned away from the focal plane of the objective appear as less sharp and less intense, the sharpness and intensity gradually decreasing as the distance from the microparticle to the focal plane increases.

35

In case that the dimensions of the imaging section exceeds the focal depth of the objectives, any 2D-projection will - apart from giving the 2D-positions of each microparticle - also provide information about the distance of each microparticle from the focal plane. This information can be used to distinguish between spatially immobilised microparticles which are otherwise indistinguishable or result in the calculation of more than one distance matrix.

One example of the correspondence problem is given in figure 10 in PCT/DK03/00635.

Solution 2: Principal component projection

This solution is provided essentially by performing the method steps listed herein below:

1. Obtaining an orthogonal pair of images of each spatially encoded bead,
2. Determining the 2D-positions of each spatially immobilised microparticle in each of said two orthogonal images,
3. Combining the resulting two orthogonal sets of 2D-positions whereby the set of possible sets of 3D-positions is obtained for each spatially encoded bead.
4. Calculating the principal component axis, x' , y' , z' , of one of set of possible sets of 3D spatially immobilised microparticle positions.
5. Calculating the projected set of 3D spatially immobilised microparticle positions by projecting the 3D spatially immobilised microparticle positions onto said principal component axis.
6. Calculating the projected distance matrix based on the projected set of 3D spatially immobilised microparticle positions.
7. Identifying single spatially encoded beads by comparing the full set of projected distance matrices of single spatially encoded beads against the full set of projected distance matrices of all spatially encoded beads. The best fit of single projected distance matrices hereby obtained identifies single spatially encoded beads.

Encoded bead identification based on the principal component projected distance matrix is considerably more stable towards mismatching of spatially immobilised

microparticles than encoded bead identification based on the conventional distance matrix.

Solution 3: Multiple distance matrix calculation

5

A multiple distance matrix can be calculated by performing the steps of

1. Obtaining an orthogonal pair of images of each spatially encoded bead,
2. Determining the 2D-positions of each spatially immobilised microparticle in each
10 of said two orthogonal images,
3. Combining the resulting two orthogonal sets of 2D-positions whereby the set of possible 3D-positions is obtained for each spatially encoded bead.
4. Computing the set of distance matrices corresponding to the set of 3D-positions
thus determined.
- 15 8. Identifying single spatially encoded beads by comparing the full set of distance matrices of single spatially encoded beads against the full set of sets of distance matrices of all spatially encoded beads. The best fit of single distance matrices hereby obtained identifies single spatially encoded beads.

20 Theoretical design criteria for spatially encoded beads

In order to demonstrate the versatility of the above methods, theoretical design criteria for spatially encoded beads with optimal features for identification can be obtained by

25

1. Forming a virtual set of spatially encoded beads in a computer on the basis of a set of spatially encoded bead properties, e.g., spatially encoded bead size distribution, spatially immobilised microparticle size distribution, and number of spatially immobilised microparticles per bead. Also, optical parameters should be included in the analysis, especially the uncertainty involved in the determination of the spatially immobilised microparticle positions,
2. Simulating random rotation of all spatially encoded beads,
3. Computing one pair of orthogonal projections of each of the spatially immobilised microparticles of each spatially encoded bead,
35

4. Combining the two orthogonal sets of 2D-positions whereby the set of possible 3D-positions is obtained for each spatially encoded bead,
5. Computing the set of distance matrices corresponding to the set of 3D-positions thus determined,
- 5 6. Identifying single spatially encoded beads by comparing the full set of distance matrices of single spatially encoded beads against the full set of distance matrices of all spatially encoded beads. The best fit of single distance matrices hereby obtained identifies single spatially encoded beads.
7. Registering the number of not-identified spatially encoded beads,
- 10 8. Varying one or more spatially encoded bead parameters and repeating the sequence 1 to 7 a one or more times.

Finding theoretical encoded beads (EB) design criteria

- 15 A virtual set of $N = 5000$ spatially encoded beads was formed in a computer with the use of a MatLab code. The following input parameters were used:

	<u>Input parameter</u>	<u>Symbol</u>	<u>Value</u>	<u>Unit</u>
20	EB diameter	D	800	micrometers
	Spatially immobilised microparticle diameter d		10	micrometers
25	Number of spatially immobilised microparticles per EB	M	5	-
	Standard deviation of the error of the spatially immobilised microparticle positions	δ	4	micrometers

- 30 This virtual set of spatially encoded beads was fed to a MatLab code for multiple distance matrix identification, which gave rise to the following output parameters:

	<u>Output parameter</u>	<u>Symbol</u>	<u>Value</u>	<u>Unit</u>
35	Number of spatially encoded beads with correspondence problem	C	458	

Number of ill-identified spatially encoded beads E 165

5 The number of spatially immobilised microparticles per spatially encoded bead, M, and the standard deviation of the error of the spatially immobilised microparticle positions, δ , were varied stepwise and fed to the multiple distance matrix ID code.

10 The result in terms of the number of spatially encoded beads with correspondence problem, C, and the number of ill-identified spatially encoded beads, E, is given in figure 11 of PCT/DK03/00635 where C and E are plotted against M and δ .

15 It can be seen from the upper plot of Fig. 11 of PCT/DK03/00635 that the number of correspondence problems increases with increasing number of spatially immobilised microparticles and with the error associated with the determination of the relative spatially immobilised microparticle positions as one would expect.

20 The lower plot in Fig. 11 Fig. 11 of PCT/DK03/00635 shows that in order to minimize the number of ill-identified spatially encoded bead, each spatially encoded bead should preferably comprise from 4 to 6 spatially immobilised microparticles. However, other numbers are also possible, such as from 3 to 8 spatially immobilised microparticles, for example 3 or 4 spatially immobilised microparticles, such as from 6 to 8 spatially immobilised microparticles for example 3, 4, 5, 6, 7, or 8 spatially immobilised microparticles.

25 At numbers of spatially immobilised microparticles below 4, the number of ill-identified spatially encoded beads increases abruptly, and at numbers higher than 4 spatially immobilised microparticles, the number of ill-identified spatially encoded beads increases gradually. The plot further shows that the number of ill-identified spatially encoded beads gradually increases with the positional error, and that the method breaks down when the positional error involved in the determination increases from 6 to 8 micrometers. These results can be used as design parameters for generating individually identifiable, spatially encoded beads.

30

35 For finding the 2D spatially immobilised microparticle-positions in images with the use of MatLab Imaging toolbox, it is possible to use e.g. a number of Gauss models,

such as from 6 to 8 Gauss models, with same shape and varying size are applied to the image. For each Gauss model applied, one goodness-of-fit images are generated with the use of linear filtering. A new image is generated on the basis of the goodness-of-fit images as pixel-wise maximum of the goodness-of-fit images. The
5 2D spatially immobilised microparticle-positions can be found in this image as the positions of local maxima that have a goodness-of-fit value above a pre-set threshold value.

Sorting section

10 Once the beads have passed through the measuring section (106) and an analysis section (408), they are optionally sorted into at least two fractions. In the embodiment disclosed in Fig. 4 one sorting section (602) is illustrated, but more sorting
15 sections are required in other embodiments. The sorting section (602) serves to remove certain beads from the capture body while leaving other beads to proceed to the unloading section.

Detailed disclosures of preferred embodiments of the sorting section are provided in Figs. 10, 11, and 12, respectively.

20 Fig. 9 discloses the unloading section comprising an inlet in the guiding plate (408) fitted with a connecting piece (902) for forming a connection to a pump via a tubing (901). A stationary bead stopper (202), e.g. a PMMA bead stopper, is attached to one or more wall parts of the guiding channel, e.g. by a thin layer of glue, and blocks
25 almost entirely the cross section of the guiding channel, thus ensuring that all beads (102) fixed to a capture hole (105) and entering the unloading section are unloaded from the capture disc (416). The stationary bead stopper at the same time keeps beads from passing from the loading section to the unloading section in the direction opposite the direction of the motion of the capture holes. This ensures that all beads
30 passes the measuring section on the way from the loading section to the unloading section.

The sorting section is illustrated in a preferred embodiment in Fig. 10. The sorting section for unloading beads (102) from the capture disc (416) is located upstream of
35 the unloading section (illustrated in a preferred embodiment in Fig. 9) and preferably

comprises a through-going hole delimited by a cylinder (1003) in the guiding plate (408) with a piston valve (1002) positioned within the cylinder. The cylinder (1003) has an inner diameter of about 1mm and is arranged perpendicular to the guiding channel so that the extended axis of the piston valve projects through the centre of the capture holes (105) of the capture disc (416) for the period of time during which the capture disc is stationary in-between the step-wise rotation of the capture disc. The piston valve (1002) positioned in the cylinder (1003) serves to connect and disconnect a vacuum in the guiding channel generated by a water pump. Preferably, a connecting piece (1001) connects the water pump to the piston valve via a tube (1004). A computer can be used to control the state of the valve (open vs. closed).

In a further embodiment of sorting section illustrated in Fig. 11 the sorting section preferably comprises

- a first cylindrical through-going hole in the guiding plate with a cylindrical high pressure connecting piece (1103) therein comprising
 - a first end extending from the surface of the guiding plate (408) for connecting the high pressure connecting piece to the outlet of a valve via a high pressure tube, the inlet of said valve being connected to a pressurised water source,
 - a second end positioned 0.1 mm from the surface of the capture body (416),
 - an interior high pressure volume (1104),
 - a high pressure outlet (1105) near the surface of the capture body and positioned such that the distance between the high pressure outlet and a passing capture hole be at its minimum in the time interval between the steps-wise motion of the capture holes,
- whereby it is obtained that when the valve is open a captured bead is blown away from its capture hole by the flow caused by the pressure drop over the high pressure outlet without neighbouring beads being affected,
- a second cylindrical through-going hole in the guiding plate with a cylindrical vacuum connecting piece (1106) therein comprising
 - a first end extending from the surface of the guiding plate (408) for connecting the vacuum connecting piece to a vacuum via a vacuum tube,
 - a second end positioned 0.1 mm from the surface of the capture body,
 - an interior vacuum volume (1101) with a diameter allowing for a bead to unhindered pass through the vacuum connecting piece,

a vacuum outlet (1102) near the surface of the capture body and positioned opposite the high pressure outlet of the high pressure connecting piece, said vacuum outlet connecting the vacuum volume to the guiding channel and having a cross section allowing for a bead to unhindered enter from the guiding channel to the vacuum volume,

whereby it is obtained that a bead that has been blown away from its capture hole is drawn from the guiding channel and into the vacuum volume due to the flow caused by the pressure drop over the vacuum outlet, and removed from the apparatus via the vacuum tube.

It is essential that the pressure drop over the vacuum outlet be sufficiently high for being able to draw away beads that have been blown from their capture holes from the guiding channel, yet sufficiently low to not remove captured beads from their capture holes.

In yet a further embodiment of the second, optional unloading section illustrated in Fig. 12 the unloading section comprises

a bead displacing body (1201) contained inside a bead displacing body container (1202) and restricted by a bead displacing body guiding channel (1201) connecting said bead displacing body container to the guiding channel, said bead displacing body container and said bead displacing body guiding channel extending from the surface of the capture body (416) and a distance less than the thickness of the guiding plate into the guiding plate, said bead displacing body guiding channel restricting the motion of said bead displacing body such that said bead displacing body can move only in directions essentially perpendicular to the motion of the beads, and said bead displacing body container restricting the motion of said bead displacement body such that said bead displacement body can only move a fixed distance in directions essentially perpendicular to the motion of the beads corresponding to a few bead diameters, and such that at one extreme of said restricted motion of said bead displacing body said bead displacing body extends across the track of the moving capture holes; and such that at the other extreme of said restricted motion of said bead displacing body said bead displacing body does not extend across the track of the moving capture holes and such that the shortest distance between the said bead displacing body to the track of the moving capture holes be larger than the bead radius, and

means for manipulating said bead displacing body comprising

a magnetic bead displacing body, and
an electric coil positioned above said magnetic bead displacing body such that when
a voltage is applied to said electric coil a magnetic field is generated that causes
said magnetic bead displacing body to move to said one extreme of said restricted
5 motion of said bead displacing body and such that when an opposite voltage is applied to said electric coil a magnetic field is generated that causes said magnetic bead displacing body to move to said other extreme of said restricted motion of said bead displacing body,

10 whereby it is obtained that a bead can be displaced from its capture hole or not removed from its capture hole at the unloading section depending on the voltage applied to said electric coil,

a second cylindrical through-going hole in the guiding plate with a cylindrical vacuum connecting piece (1106) therein comprising

15 a first end extending from the surface of the guiding plate (408) for connecting the vacuum connecting piece to a vacuum via a vacuum tube,

a second end positioned 0.1 mm from the surface of the capture body,
an interior vacuum volume (1101) with a diameter allowing for a bead to unhindered
pass through the vacuum connecting piece,

20 a vacuum outlet (1102) near the surface of the capture body and positioned opposite the high pressure outlet of the high pressure connecting piece, said vacuum outlet connecting the vacuum volume to the guiding channel and having a cross section allowing for a bead to unhindered enter from the guiding channel to the vacuum volume,

25 whereby it is obtained that a bead that has been blown away from its capture hole is drawn from the guiding channel and into the vacuum volume due to the flow caused by the pressure drop over the vacuum outlet, and removed from the apparatus via the vacuum tube.

whereby it is obtained that beads can be sorted into two fractions, by controlling the voltage applied to the electric coil.

30

When both the unloading section and the sorting section are present the different sections are connected to different pumps or the same pump for generating a vacuum in the unloading section and sorting section, respectively.

Accordingly, using the apparatus for bead sorting disclosed herein above it is possible to perform a method wherein

- a) beads are dispersed in dispersion liquid, thereby providing a dispersion comprising the beads to be measured and sorted,
- 5 b) the stepper motor is started, whereby the vacuum container comprising the capture disc is rotated in a step-wise manner in the direction indicated by the arrow in Fig. 5,
- c) the vacuum container comprising the capture disc is submerged in dispersion liquid,
- 10 d) a first and a second vacuum is applied to the vacuum container and to the pipe for unloading beads by activating suitable pressure controlling devices including pumps,
- e) dispersion comprising the dispersed beads is fed to the loading section of the apparatus, the beads being confined to a circular volume contacting the first surface of the capture disc by a stationary circular channel, such as a 1.1mm deep and 1mm wide stationary circular channel carved in a guiding plate and extending from the surface of the first surface of the disc and running along the perimeter of the circle defined by the capture holes. The capture holes are positioned in the middle part of the channel, whereby the beads are sucked onto the capture disc, essentially only
- 15 one bead being captured at each capture hole.
- f) individual beads are transferred along a circular path through the measuring section, where the beads are imaged, the images preferably being analysed and stored on a data storage medium such as e.g. a computer.
- g) individual beads are further transferred to the unloading section where they are
- 20 unloaded and removed from the capture disc through the pipe.
- 25

Encoded beads comprising spatially immobilised microparticles

- 30 It is one object of the present invention to provide a polymer matrix for solid phase synthesis in the form of a bead comprising a plurality of spatially immobilised microparticles or vacuoles, wherein each microparticle or vacuole is individually detectable. The beads have different optical or spectroscopic properties from those of the immobilised microparticles or vacuoles. The immobilised microparticles or vacuoles can be mono-disperse or hetero-disperse, and the immobilised microparticles can
- 35 be regular spherical beads or vacuoles, or they can be irregular microparticles. The

bead can be spherical, i.e. having a regular, rounded shape, or it can have an irregular shape.

Each bead preferably comprises at least 2 microparticles, such as at least 3 microparticles, for example at least 4 microparticles, and preferably 10 or less microparticles, such as less than 5 microparticles. The microparticles can be essentially spherical, and preferably at least 2 such as 3, for example 5 of said microparticles have essentially the same diameter. The microparticles are preferably essentially mono-disperse and/or less than 10 micrometer in diameter, such as less than 5 micrometer in diameter, for example less than 1 micrometer in diameter, such as less than 0.1 micrometer in diameter.

The present invention resides in one embodiment in a bead on which a compound can be synthesised, wherein the bead has at least two markers integrally associated therewith, which markers are detectable and/or quantifiable during synthesis of the compound. The markers define a code identifying the bead before, during and after synthesis of a compound. Through the use of its plurality of detectable and/or quantifiable markers, preferably optically detectable and/or quantifiable markers, the bead of the present invention provides more "pre-encoded" information compared to other beads of the prior art and thus provides larger combinational library sizes that can be encoded.

This "pre-encoded" information may be read by specialized apparatus such as e.g. flow cytometers and the information can be used to track the synthetic history of an individual bead in a combinatorial process as described hereinafter. An example of a specialised apparatus for recording the "pre-encoded" information contained in an encoded bead is the specialised encoded bead reader apparatus disclosed herein below.

The larger the diversity of detectable and/or quantifiable markers of a bead, the greater the degree of decipherability or resolution of the bead in a large population of beads. In this regard, each detectable and/or quantifiable marker of a bead provides at least a part of the information required to distinctively identify the bead. The larger the number of such markers, the more detailed the identifying information that is compilable for a given bead, which may be used to distinguish that bead from other beads. On the other hand the complication of detection is increased markedly

with the number of markers.

Markers

5 The microparticles can comprise a marker, which is detectable by any form of electromagnetic radiation including fluorescent emission. However, the marker can also be detected by fast spectroscopic techniques other than fluorescence spectroscopy. The microparticles of said beads in one embodiment comprise a spectroscopically detectable marker and/or a fluorescence detectable marker.

10

Fluorescence detectable markers are preferably selected from the fluorescent group of compounds and materials consisting of fluorescent organic poly-cyclic compounds, conjugated vinylic compounds, hetero-cyclic transition metal complexes, rare earth metal compounds, inorganic oxides and glasses.

15

Fluorescence detectable markers can be detected by two photon fluorescence spectroscopy and/or by one photon fluorescence spectroscopy. Fluorescence detectable markers can additionally be detected by time-correlated photon fluorescence spectroscopy.

20

Examples of detection by fast spectroscopic techniques other than fluorescence spectroscopy include, but is not limited to fast spectroscopic techniques such as infrared spectroscopy, raman spectroscopy, visible light spectroscopy, UV spectroscopy, electron spin resonance, and nuclear magnetic resonance.

25

The fluorescence detectable marker is preferably selected from the group consisting of dyes based on the structure of fluorescein, Oregon green, rhodamine, aminobenzoic acid, AlexaTM probes, BODIPY-dyes, cascade blue dye, coumarine, naphthalenes, dansyl, indoles, pyrenes pyridyloxazole, cascade yellow dye, Dapoxyl Dye, Fluorescamine, aromatic ortho di-aldehydes, OPA and NDA, ATTO-Tag's, 7-Nitrobenz-2-Oxa-1,3-Diazole or derivatives thereof. The fluorescence detectable marker in one embodiment is preferably a UV or visible light-excitabile microsphere.

30

Fluorescent dyes may be incorporated into beads and microparticles by any suitable method known in the art, such as copolymerisation of a polymerisable monomer and

35

a dyecontaining co-monomer or addition of a suitable dye derivative in a suitable organic solvent to an aqueous suspension as for example disclosed in Singer et al., (supra including references cited therein), Campian et al. (1994, In "Innovation and Perspectives on Solid Phase Synthesis" Epton, R., Birmingham: Mayflower, 469-472, incorporated herein by reference) and Egner et al. (1997, Chem. Commun. 735-736, incorporated herein by reference). Alternatively, fluorescent beads may be produced having at least one fluorescent spherical zone. Such microparticles may be prepared as for example described in U. S. Patent No. 5,786,219 (Zhang et al.), which is incorporated herein by reference. In a preferred embodiment, one or more fluorescent dyes are incorporated within a microparticle.

Also included in the present invention are markers which are detectable by fast detection techniques other than spectroscopy, such as light scattering, reflection, diffraction or light rotation.

Electromagnetic radiation-related markers are preferably selected from the group consisting of fluorescence emission, luminescence, phosphorescence, infrared radiation, electromagnetic scattering including light and X-ray scattering, light transmittance, light absorbance and electrical impedance.

Preferably, the electromagnetic radiation-related marker is a light emitting, light transmitting or light absorbing marker detectable by illuminating the microparticle with incident light of one or more selected wavelengths or of one or more selected vectors.

It is preferred that at least one of the markers of a bead is an electromagnetic radiation-related marker suitably selected from the group consisting of atomic or molecular fluorescence emission, luminescence, phosphorescence, infrared radiation, electromagnetic scattering including light and X-ray scattering, light transmittance, light absorbance and electrical impedance.

The fluorescence emission can result from e.g. excitation of one or more fluorescent markers attached to, or contained within, the bead. In the case of two or more fluorescent markers being utilised, the markers can be the same and the markers can comprise the same or varying amounts of a fluorophore. In the latter case the mark-

ers are intensity-differentiated.

Alternatively, the markers may be different wherein they are present in a ratio of 1: 1 or varying ratios. Reference may be made in this regard to WO 95/32425 which is
5 incorporated herein by reference.

Exemplary fluorophores which may be used in accordance with the present invention include those listed in WO 93/06121, which is incorporated by reference herein.

10 Any suitable fluorescent dye may be used for incorporation into the bead of the invention. For example, reference may be made to U. S. Patents 5,573,909 (Singer et al., which is incorporated herein by reference) and 5,326,692 (Brinkley et al., which is incorporated herein by reference) which describe a plethora of fluorescent dyes. Reference may also be made to fluorescent dyes described in U. S. Patent Nos.
15 5,227,487, 5,274,113, 5,405,975, 5,433,896, 5,442,045, 5,451,663, 5,453,517, 5,459,276, 5,516,864, 5,648,270 and 5,723,218, which are all incorporated herein by reference.

20 In one embodiment, one or more of the fluorescent markers can preferably be incorporated into a microparticle, such as a polymeric microparticle, or a ceramic microparticle. Such microparticles can preferably be attached to a bead by use of e.g. colloidal interactions as for example disclosed by Trau and Bryant in PCT/AU98/00944, incorporated herein by reference.

25 When the marker is spectroscopically detectable, there is in one embodiment provided a marker capable of being probed by a range of frequencies differing by less than about 20%, such as less than about 10%, based on the numerical highest frequency value. The marker can also be probed by one or more predetermined frequencies.

30 Any suitable method of analysing fluorescence emission is encompassed by the present invention. In this regard, the invention contemplates techniques including, but not restricted to, 2-photon and 3-photon time resolved fluorescence spectroscopy as for example disclosed by Lakowicz et al. (1997, Biophys. J., 72: 567, incorporated herein by reference), fluorescence lifetime imaging as for example disclosed
35

by Eriksson et al. (1993, Biophys. J., 2: 64, incorporated herein by reference), and fluorescence resonance energy transfer as for example disclosed by Youvan et al. (1997, Biotechnology et alia 3: 1-18).

5 Luminescence and phosphorescence may result respectively from a suitable luminescent or phosphorescent label as is known in the art. Any optical means of identifying such label may be used in this regard.

10 Infrared radiation may result from a suitable infrared dye. Exemplary infrared dyes that may be employed in the invention include, but are not restricted to, those disclosed in Lewis et al. (1999, Dyes Pigm. 42 (2): 197), Tawa et al. (1998, Mater. Res. Soc. Symp. Proc. 488 (Electrical, Optical, and Magnetic Properties of Organic Solid-State Materials IV), 885-890), Daneshvar, et al. (1999, J. Immunol. Methods 226 (1-2): 119-128), Rapaport et al. (1999, Appl. Phys. Lett. 74 (3): 329-331) and Durig et al. (1993, J. Raman Spectrosc. 24 (5): 281-5), which are incorporated herein by reference. Any suitable infrared spectroscopic method may be employed to interrogate the infrared dye. For instance, fourier transform infrared spectroscopy as for example described by Rahman et al. (1998, J. Org. Chem., 63: 6196, incorporated herein by reference) may be used in this regard.

20 Suitably, electromagnetic scattering may result from diffraction, reflection, polarisation or refraction of the incident electromagnetic radiation including light and Xrays. In this regard, the beads may be formed of different materials to provide a set of beads with varying scattering properties such as different refractive indexes as for example described supra. Any suitable art recognised method of detecting and/or quantifying electromagnetic scatter may be employed. In this regard, the invention also contemplates methods employing contrast variation in light scattering as, for example, described in van Helden and Vrij (1980, Journal of Colloidal and Interface Science 76: 419-433), which is incorporated herein by reference.

30 Markers other than electromagnetic radiation-related markers can be utilised, optionally in combination with electromagnetic radiation-related markers. Such markers include e.g. size and/or shape of the bead. For example, beads may be shaped in the form of spheres, cubes, rectangular prisms, pyramids, cones, ovoids, sheets or cylinders, including intermediate forms as well as irregular shapes. Electrical imped-

35

ance across a bead may be measured to provide an estimate of the bead volume (Coulter).

5 The marker in one embodiment comprises a chromophoric label. Suitable beads comprising such chromophores are described e.g. by Tentorio et al. (1980, Journal of Colloidal and Interface Science 77: 419-426), which is incorporated herein by reference.

10 A suitable method for non-destructive analysis of organic pigments and dyes, using a Raman microprobe, micro-fluorometer or absorption micro-spectrophotometer, is described for example in Guineau, B. (1989, Cent. Rech. Conserv. Documents Graph., CNRS, Paris, Fr. Stud. Conserv 34 (1): 38-44), which is incorporated herein by reference.

15 Alternatively, the marker may comprise a magnetic material inclusive of iron and magnetite, or an marker that is detectable by acoustic backscatter as is known in the art.

20 It will be understood from the foregoing that the number of beads having different detectable codes will be dependent on the number of different detectable and/or quantifiable markers integrally associated with the beads.

Beads comprising polymers and other materials

25 Beads can comprise any solid material as long as it has sufficient mechanical strength to withstand the mechanical stress invoked on a bead captured at a capture hole. Also the beads must be sufficiently hard to withstand being sucked through the capture hole. On the other hand preferred materials are sufficiently flexible for the bead to conform sufficiently to the capture hole to seal the capture hole when captured and thereby ensuring a maximum difference in pressure between the part of the bead facing the capture hole and the part of the bead facing away from the capture hole, said pressure difference giving rise to a force acting on the bead in a direction opposite to the normal force acting on the bead imposed by the capture body, said opposing forces immobilising the bead at the capture hole. A wide range of materials conform to the above criteria and include cross-linked synthetic poly-

30

35

mers, biological specimens, such as fish spawn, reptile and amphibian eggs, and aquatic animals of proper size and shape. Preferred materials for beads comprise materials capable of providing a basis for combinatorial chemistry, especially polymers capable of providing a basis for combinatorial chemistry. Also inorganic materials capable of providing a solid phase basis for combinatorial chemistry can be used.

Beads comprising polymers

10 Polymers for encoded beads according to the present invention are preferably optically transparent in the optical excitation range of the fluorescent marker and/or the emission wavelength range of the fluorescent marker comprised by the microparticles and/or vacuoles of the polymer matrix.

15 Encoded polymer beads according to the invention can be prepared from a variety of polymerisable monomers, including styrenes, acrylates and unsaturated chlorides, esters, acetates, amides and alcohols, including, but not limited to, polystyrene (including high density polystyrene latexes such as brominated polystyrene), polymethylmethacrylate and other polyacrylic acids, polyacrylonitrile, polyacrylamide, polyacrolein, polydimethylsiloxane, polybutadiene, polyisoprene, polyurethane, polyvinylacetate, polyvinylchloride, polyvinylpyridine, polyvinylbenzylchloride, polyvinyltoluene, polyvinylidenechloride and polydivinylbenzene, as well as PEGA, SPOCC and POEPOP. The beads may be prepared from styrene monomers or PEG based macro-monomers.

25 The polymer is in preferred embodiments selected from the group consisting of polyethers, polyvinyls, polyacrylates, polymethacrylates, polyacrylamides, polyurethanes, polyacrylamides, polystyrenes, polycarbonates, polyesters, polyamides, and combinations thereof.

30 In more preferred embodiments, the polymer is selected from the group consisting of SPOCC, PEGA, HYDRA, POEPOP, PEG-polyacrylate copolymers, polyether-polyamine copolymers, cross-linked polyethylene di-amines, and combinations thereof.

35

Encoded beads other than polymer beads

However, the invention is not limited to the above polymers as beads other than polymer beads can in principle comprise any at least partly transparent solid material capable of providing a base for combinatorial chemistry. As illustrative examples, the beads can be polymeric supports such as polymeric beads, which are preferably formed from polystyrene cross-linked with 1-5% divinylbenzene. Polymeric beads can also be formed from hexa-methylenediaminepolyacryl resins and related polymers, poly N- {2- (4-hydroxyphenyl) ethyl} acrylamide (i. e., (one Q)), silica, cellulose beads, polystyrene beads poly (halomethylstyrene) beads, poly (halostyrene) beads, poly (acetoxystyrene) beads, latex beads, grafted copolymer beads such as polyethylene glycol/polystyrene, porous silicates for example controlled pore-glass beads, polyacrylamide beads for example poly (acryloylsarcosine methyl ester) beads, dimethylacrylamide beads optionally cross-linked with N, N'-bis-acryloyl ethylene di-amine, glass beads coated with a hydrophobic polymer inclusive of cross-linked polystyrene or a fluorinated ethylene polymer which provides a material having a rigid or semi-rigid surface, poly (N-acryloylpyrrolidine) resins, Wang resins, Pam resins, Merrifield resins, PAP and SPARE polyamide resins, polyethylene functionalised with acrylic acid, kieselguhr/polyamide (Pepsyn K), polyHipe™, PS/polydimethylacrylamide copolymers, CPG, PS beads and Tentage™, PEG-PS/DVB copolymers.

Ceramic beads may be comprised of silica, alumina, titania or any other suitable transparent material. A suitable method of making silica beads is described, for example in "The Colloid Chemistry of Silica and Silicates" (Cornell University Press) by Ralph K Iler 1955 and U. S. Patent No 5,439,624, the disclosures of which are incorporated herein by reference. Reference may also be made to W095/25737 and W097/15390, incorporated herein by reference, which disclose examples of such beads.

Dimensions of encoded beads

The beads according to the invention preferably has a ratio $R = a/b$ between a) the volume of the bead and b) the average volume of the microparticles which is in the range of from 10000000:1 to 10:1, such as in the range of from 1000000:1 to 30:1,

for example in the range of from 1000000:1 to 100:1, for example in the range of from 1000000:1 to 200:1, such as in the range of from 1000000:1 to 1000:1, for example in the range of from 100000:1 to 1000:1, such as in the range of from 100000:1 to 2000:1.

5

Independently of the above ratios, the beads according to the invention preferably comprises an average volume of the swelled bead of from 0.000001 μL – 50 μL , such as an average volume of the swelled bead of from 0.00001 μL – 5 μL , for example an average volume of the swelled bead of from 0.001 μL – 1 μL , such as an average volume of the swelled bead of from 0.01 μL – 0.1 μL .

10

Any combination of the above falls within the invention and accordingly, for a ratio $R = a/b$ between a) the volume of the bead and b) the average volume of the micro-particles which is in the range of from 10000000:1 to 10:1, such as in the range of from 1000000:1 to 30:1, for example in the range of from 1000000:1 to 100:1, for example in the range of from 1000000:1 to 200:1, such as in the range of from 1000000:1 to 1000:1, for example in the range of from 100000:1 to 1000:1, such as in the range of from 100000:1 to 2000:1, the average volume of the swelled bead can be from 0.000001 μL – 50 μL , such as an average volume of the swelled bead of from 0.00001 μL – 5 μL , for example an average volume of the swelled bead of from 0.001 μL – 1 μL , such as an average volume of the swelled bead of from 0.01 μL – 0.1 μL .

15

20

Composition comprising a plurality of encoded beads

25

The invention is in one embodiment directed to a plurality of beads comprising a population that is pre-encoded. Accordingly, each bead of that population has a code, which distinctively identifies a respective bead before, during and after said synthesis from other beads. The diversity of the said population of beads, therefore, resides in beads of said population having relative to each other different spatial locations of detectable markers, which are used to provide distinctive codes for detection of each of those beads.

30

The composition of beads of the invention may be used in many applications, such as affinity chromatography for purification and/or isolation of desirable target com-

35

pounds, and combinatorial chemistry procedures that do or do not involve a split-and-combine procedure. Preferably, however, such assemblies are used in combinatorial chemistries, which involve a split-process-recombine procedure.

5 Preparation of beads

A plurality of beads according to the invention may be prepared by any suitable method. Preferably, when colloidal beads including polymeric and ceramic beads are used as beads, the colloid dispersion of such beads is stabilised. Exemplary
10 methods imparting colloidal stabilisation are described for example in Hunter, R. J. (1986, "Foundation of Colloid Science", Oxford University Press, Melbourne) and Napper, D. H. (1983, "Polymeric stabilisation of Colloidal Dispersions" Academic Press, London), the disclosures of which are incorporated herein by reference. In this regard, the most widely exploited effect of nonionic polymers on colloid stability
15 is steric stabilisation; in which stability is imparted by polymer molecules that are absorbed onto, or attached to, the surface of the colloid beads. Persons of skill in the art will recognise that it is possible to impart stability by combinations of different stabilisation mechanisms: e. g., surface charge on the beads can impact colloidal stability via electrostatic stabilisation, and an attached polyelectrolyte can impart
20 stability by a combination of electrostatic and steric mechanisms (electrosteric stabilisation). Polymer that is in free solution can also influence colloid stability. Stabilisation by free polymer is well-documented (Napper 1983, supra) and is called depletion stabilisation.

25 Preferably, steric stabilisation of colloid dispersions is employed. In this regard, steric stabilisation is widely exploited because it offers several distinct advantages over electrostatic stabilisation. For example, one advantage is that aqueous sterically stabilised dispersions are comparatively insensitive to the presence of electrolytes because the dimensions of non-ionic chains vary relatively little with the electrolyte concentration.
30

Any suitable stabilising moiety may be used for stabilising colloidal dispersions. Exemplary stabilising moieties that impact on colloidal stability are given herein below: Poly (oxyethylene), Poly (vinyl alcohol), Poly (acrylic acid), Poly (acrylamide), and
35 sorbitol monolaurate as well as commonly used emulsion stabilizers.

The composition of encoded beads preferably comprises at least 10^2 individually identifiable beads, such as at least 10^3 individually identifiable beads, for example at least 10^5 individually identifiable beads, such as at least 10^7 individually identifiable beads, for example at least 10^9 individually identifiable beads, such as at least 10^{11} individually identifiable beads, for example at least 10^{13} individually identifiable beads, such as at least 10^{15} individually identifiable beads, for example at least 10^{17} individually identifiable beads, such as at least 10^{19} individually identifiable beads, for example at least 10^{21} individually identifiable beads, such as at least 10^{23} individually identifiable beads.

Preparation of encoded beads

It is a further object of the invention to provide a method for generating a composition comprising a plurality of encoded beads, said method comprising the steps of

- iv) synthesizing a monomer and/or macro-monomer and a crosslinker for polymerisation, and,
- v) mixing the monomer and/or macro-monomer with microparticles to give an even dispersion of microparticles in the mixture, and
- vi) polymerising the monomer and/or macro-monomer by either i) suspension polymerisation and/or; ii) inverse suspension polymerisation and/or iii) bulk polymerisation followed by granulation and/or iv) droplet polymerisation.

In particular, spatially encoded PEGA-type polymer beads can be prepared by inverse phase co-polymerisation at 70°C of acrylamide-end-capped polyethyleneglycol and acrylamide in a 1:1 ratio in 2% (w/w) aqueous sorbitan monolaurate in the presence of 0.6% (w/w) di-methylformamide swelled Oregon green (supplied by Molecular probes) dyed microspheres (TentaGel M30202 supplied by RAPP Polymere). After polymerisation the beads are washed with demineralised water and sieved. The resulting 0.5 – 0.7mm diameter fraction is isolated and e.g. analysed in the apparatus described in Example 1 herein. Preferably, more than 60% of the en-

coded beads, such as about 80% or more than 80% of the encoded beads comprise from 4 to 10 microparticles, such as from 4-6 microparticles.

5 In a further aspect there is provided a method for generating a composition comprising a plurality of encoded beads and detecting and/or identifying individually identifiable beads, said method comprising the steps of:

- (a) preparing a plurality of beads comprising spatially immobilised microparticles comprising at least one marker;
- 10 (b) detecting and/or quantifying the said markers of each bead and assigning a code; such as the result of a determination of the location of spatially encoded microparticles or vacuoles, for each bead;
- (c) identifying beads having distinctive codes; and optionally
- (d) identifying beads having similar codes; and further optionally
- 15 (e) sorting the beads having distinctive codes from the beads having non-distinctive codes to thereby provide a plurality of encoded beads.

20 There is also provided the use of such a composition comprising a plurality of encoded beads linked to a bioactive compound for identifying bioactive compound binding partners, and a use of the composition of beads linked to different bioactive compounds for diagnostic purposes, wherein the binding and determination of a predetermined binding partner to a substrate or bioactive compound on the carrier is at least indicative of a positive diagnosis.

25 Bioactive compounds of particular interest are e.g. those which may be so screened include agonists and antagonists for cell membrane receptors, toxins, venoms, viral epitopes, hormones, sugars, co-factors, peptides, enzyme substrates, drugs inclusive of opiates and steroids, proteins including antibodies, monoclonal antibodies, antisera reactive with specific antigenic determinants, nucleic acids, lectins, polysaccharides, cellular membranes and organelles.

30

The present invention also encompasses as bioactive compounds a plurality of unique polynucleotide or oligonucleotide sequences for sequence by hybridisation (SBH) or gene expression analyses. Persons of skill in the art will recognise that

35 SBH uses a set of short oligonucleotide probes of defined sequence to search for

complementary sequences on a longer target strand of DNA. The hybridisation pattern is used to reconstruct the target DNA sequence. Accordingly, in the context of the present invention, an aqueous solution of fluorescence labelled single stranded DNA (ssDNA) of unknown sequence may be passed over the library of polynucleotide or oligonucleotide compounds and adsorption (hybridisation) of the ssDNA will
5 occur only on beads which contain polynucleotide or oligonucleotide sequences complementary to those on the ssDNA. These beads may be identified using an apparatus and the methods of the present invention.

10 Once a compound having the desired activity is obtained, the sequence of reaction steps experienced by the bead on which the compound was synthesised may be deconvoluted simply by analysing the tracking data for that bead as described, for example, hereinafter. The sequence of building blocks defining the compound of interest may thus be ascertained and a molecule comprising this sequence can by
15 synthesised by conventional means (e. g., amino acid synthesis or oligonucleotide synthesis) as is known in the art.

Encoded beads can be sorted according to at least one optical parameter, i.e., a physical property that influences the optical signal arising from the encoded bead,
20 such as size and shape and number of microparticles per encoded bead, whereby it is obtained that the resulting encoded beads are individually identifiable by optical means. Preferred means for sorting encoded beads include sedimentation, centrifugation, sieving, cyclone separation, total fluorescence separation, and separation according to number of microparticles per encoded bead. Accordingly, separation
25 based on total fluorescence and/or separation based on the number of microparticles per encoded bead can be carried out simultaneously and/or sequentially using an apparatus of the present invention further comprising an analysing device and a sorting device.

30 The polymerisation reaction can preferably be a radical initiated chain polymerisation reaction, or an anion initiated ring opening polymerisation reaction, or a cation initiated ring opening polymerisation reaction.

Functional groups on the beads can subsequently be reacted with different bioactive
35 compound building blocks as described herein elsewhere. Each reaction step can

be monitored as essentially each bead of the encoded bead is individually detectable. The below methods describe in more detail the preparation of microparticles.

Sorting microparticles according to size and controlling the size distribution of microparticles.

5

10 Microparticles may be sorted according to at least one optical parameter, i.e., a physical property that influences the optical signal arising from the microparticle, such as size, shape, colour, or fluorescence, whereby it is obtained that the relative positions of said microparticles can be determined by optical means. Preferred means for sorting microparticles include sedimentation, centrifugation, sieving, and cyclone separation.

15

Using spatially immobilised microparticles as microparticles in encoded beads places some limitations on the size of the spatially immobilised microparticles. Too large spatially immobilised microparticles tend to shadow each other and too small spatially immobilised microparticles may pass through the optical set-up unnoticed. Generally the size distribution of spatially immobilised microparticles synthesized by suspension polymerisation or emulsion polymerisation is very broad. Hence, a method for obtaining a fraction of spatially immobilised microparticles with controlled size distribution is required.

20

25 It has been found that the micro beads in di-methylformamide (DMF) solution after centrifugation at 250rpm for 22min are considerably smaller than the micro beads in the sediment. This indicates that it is possible to remove small beads by repeated centrifugation at 250rpm and removing the liquid phase after each run, i.e. the concentration of small beads in the sediment should decrease after each run.

25

Post identification of spatially encoded beads

30

The sequence comprising 1) determination of the spatially immobilised microparticle positions in the images, 2) calculation of the corresponding set of possible 3D-positions of the spatially immobilised microparticles and the corresponding distance matrices, and 3) the distance matrix based identification, may be too time consuming to allow for on-line identification of encoded beads. As an alternative post identi-

35

fication of "hits", i.e., spatially encoded beads carrying compounds which have shown to be of interest in a given assay can be carried out

5 As the hits are not identified until after the full combinatorial chemistry synthesis, the hit identification will have to be carried out after the combinatorial synthesis process has been finished. Following a procedure comprising the following steps can do this:

1. A plurality of spatially encoded polymer beads is synthesized
2. Images or laser scans of each encoded bead is recorded and stored as the
- 10 beads are being split into a number of jars, $J_1, J_2 \dots J_i$ in which jars one combinatorial synthesis step is carried out.
3. All beads are pooled
4. The sequence comprising steps 2 and 3 is repeated a number of times.
5. All spatially encoded beads are screened in a given assay and the *hits* are separated
- 15 rated
6. The jar sequence of each *hit* is determined on the basis of the recordings obtained under step 2 and the use of an ID method.

Method for generating an encoded bead comprising different bioactive compounds

20

It is a yet further object of the invention to provide a method for generating an encoded, bead comprising a bioactive compound, wherein essentially each bead of the polymer matrix is individually identifiable, said method comprising the steps of

- 25 i) spatially immobilizing microparticles in polymer beads,
- ii) isolating encoded beads by automated sorting,
- iii) recording and storing the distance matrix for essentially each bead,
- 30 iv) performing a stepwise synthesis of bioactive compounds by reacting functional groups of the encoded beads with at least one building block,
- v) recording the identity of each bead that enter each reaction step iv),

35

- vi) isolating beads of interest, preferably by performing an assay or a diagnostic screen,
- vii) identifying the bioactive compound attached to at least one individual bead by recording the identity of at least one isolated bead, and optionally comparing said recording with the recording, preferably a distance matrix, recorded for at least a plurality of the remaining beads.

A binding assay for characterising or isolating bioactive compounds bound to the beads can be performed by measuring e.g. the binding of a protein to a ligand bound to the polymer matrix. Also, an assay can be performed by measuring e.g. an enzyme activity on a substrate bound to the polymer matrix. It is also possible to perform an assay by measuring e.g. enzyme inhibition of a molecule bound to the polymer matrix, or to perform an assay by measuring e.g. receptor interaction with a bioactive compound bound to the polymer matrix.

For the above methods, the plurality of microparticles preferably comprise a fluorescence detectable marker, such as a fluorescence detectable marker detectable by two photon fluorescence microscopy, or a fluorescence detectable marker detectable by one photon fluorescence microscopy.

Method for deconvoluting a conventional library

In a further aspect, the invention provides a method for synthesising and deconvoluting a combinatorial library comprising the steps of :

- (a) apportioning in a stochastic manner among a plurality of reaction vessels a plurality of beads on which a plurality of different compounds can be synthesised, wherein said plurality of beads comprises a population of detectably distinct beads each having a code, such as spatially immobilised microparticles or vacuoles, which distinctively identifies a respective bead before, during and after said synthesis from other beads,
- (b) determining and recording the codes, preferably in the form of the spatial position of the immobilised microparticles or vacuoles, of said plurality of beads in order to track the movement of individual detectably distinct beads into particular reaction

vessels of said plurality of reaction vessels, wherein said codes are determined prior to step (d);

(c) reacting the beads in each reaction vessel with a building block;

(d) pooling the beads from each reaction vessel;

5 (e) apportioning the beads in a stochastic manner among the plurality of reaction vessels;

(f) reacting the beads in each reaction vessel with another building block;

(g) recording the codes of said plurality of beads in order to track the movement of individual detectably distinct beads into particular reaction vessels of said plurality of reaction vessels, wherein said codes are recorded after step (e) and/or step (f);

10 (h) pooling the beads from each reaction vessel;

(i) iterating steps (e) through (h) as required in order to create a combinatorial compound library wherein member compounds of the library are associated with the detectably distinct beads and wherein codes of the detectably distinct beads are deconvolutable using tracking data provided by said recordal steps to identify the sequence of reactions experienced by the said detectably distinct beads.

15 The identification steps (step (c) and (d)) may be effected by use of any suitable method or apparatus for analysing the spatially immobilised markers of a bead.

20 Preferably, these steps are effected by flow cytometry, which typically detects optical parameters. For example, a flow cytometer may be used to determine forward scatter (which is a measure of size of a bead), side scatter (which is sensitive to refractive index and size of a microparticle (seen Shapiro 1995, "Practical flow cytometry", 3d ed. Brisbane, Wiley-Liss)), and fluorescent emission.

25 Any suitable algorithm may be employed to track and/or sort individual detectably unique beads. Preferably, a real-time algorithm is employed.

30 Suitably, the step of sorting (step (e)) is characterised in that the population of detectably distinct beads constitutes at least about 50%, preferably at least about 70%, more preferably at least about 90%, and more preferably at least about 95% of the plurality of beads resulting from step (e).

35 From the foregoing, a population of detectably unique beads can be generated from a raw population of beads using e.g. specialised flow cytometric techniques. The

population of detectably unique beads is thereby "pre-encoded" and can be used for combinatorial synthesis.

Building block reactions

5

The beads of the invention are applicable to any type of chemical reaction that can be carried out on a solid support. Such chemical reaction includes, for example:

1. 2 + 2 cycloadditions including trapping of butadiene;
2. [2 + 3] cycloadditions including synthesis of isoxazolines, furans and
10 modified peptides;
3. acetal formation including immobilization of diols, aldehydes and ketones;
4. aldol condensation including derivatization of aldehydes, synthesis of
propanediols;
5. benzoin condensation including derivatization of aldehydes;
- 15 6. cyclocondensations including benzodiazepines and hydantoins, thiazolidines,
-turn mimetics, porphyrins, phthalocyanines;
7. Diels-Alder reaction including cyclization of diesters;
8. Diels-Alder reaction including derivitisation of acrylic acid ;
9. Electrophilic addition including addition of alcohols to alkenes;
- 20 10. Grignard reaction including derivatisation of aldehydes;
11. Heck reaction including synthesis of disubstituted alkenes;
12. Henry reaction including synthesis of nitrile oxides in situ (see 2 + 3
cycloaddition);
13. catalytic hydrogenation including synthesis of pheromones and peptides
25 (hydrogenation of alkenes);
14. Michael reaction including synthesis of sulfanyl ketones,
bicyclo[2.2.2] octanes;
15. Mitsunobu reaction including synthesis of aryl ethers, peptidyl phosphonates
andthioethers;
- 30 16. nucleophilic aromatic substitutions including synthesis of quinolones;
17. oxidation including synthesis of aldehydes and ketones;
18. Pausen-Khand cycloaddition including cyclization of norbornadiene with
pentynol;
19. photochemical cyclisation including synthesis of helicenes;

20. reactions with organo-metallic compounds including derivitisation of aldehydes and acyl chlorides;
21. reduction with complex hydrides and Sn compounds including reduction of carbonyl, carboxylic acids, esters and nitro groups;
- 5 22. Soai reaction including reduction of carboxyl groups;
23. Stille reactions including synthesis of biphenyl derivatives;
24. Stork reaction including synthesis of substituted cyclohexanones;
25. reductive amination including synthesis of quinolones;
26. Suzuki reaction including synthesis of phenylacetic acid derivatives; and
- 10 27. Wittig, Wittig-Horner reaction including reactions of aldehydes; pheromones and sulfanyl ketones.

Reference may also be made to Patel et al., (April 1996, DDT 1 (4): 134-144) who describe the manufacture or synthesis of N-substituted glycines, polycarbarnates, mercaptoacylprolines, diketopiperazines, HIV protease inhibitors, 1-3 diols, hydroxystilbenes, B-lactams, 1,4-benzodiazepine-2-5-diones, dihydropyridines and dihydropyrimidines.

Reference may also be made to synthesis of polyketides as discussed, for example, in Rohr (1995, Angew. Int. Ed. Engl. 34: 881-884).

Chemical or enzymatic synthesis of the compound libraries of the present invention takes place on beads. Thus, those of skill in the art will appreciate that the materials used to construct the beads are limited primarily by their capacity for derivitisation to attach any of a number of chemically reactive groups and compatibility with the chemistry of compound synthesis. Except as otherwise noted, the chemically reactive groups with which such beads may be derivatised are those commonly used for solid state synthesis of the respective compound and thus will be well known to those skilled in the art. For example, these bead materials may be derivatised to contain functionalities or linkers including-NH₂, -NHNH₂, -ONH₂, -COOH, -SH, -SeH, -SO₃H, -GeH, or -SiR₂H groups.

Linkers for use with the beads may be selected from base stable anchor groups as described in Table 2 of Fruchtel et al. (1996, supra, the entire disclosure of which is incorporated herein by reference) or acid stable anchor groups as described in Ta-

ble 3 of Fruchtel et al. (1996, supra). Suitable linkers are also described in W093/06121, which is incorporated herein by reference.

5 In the area of peptide synthesis, anchors developed for peptide chemistry are stable to either bases or weak acids, but for the most part, they are suitable only for the immobilisation of carboxylic acids. However, for the reversible attachment of special functional groups, known anchors have to be derivatised and optimised or, when necessary, completely new anchors must be developed. For example, an anchor group for immobilisation of alcohols is (6 hydroxymethyl)-3,4 dihydro-2H-pyran, 10 whereby the sodium salt is covalently bonded to chloromethylated Merrifieldz resin by a nucleophilic substitution reaction. The alcohol is coupled to the support by electrophilic addition in the presence of pyridinium toluene-4 sulphonate (PPTS) in dichloromethane. The resulting tetrahydropyranyl ether is stable to base but can be cleaved by transesterification with 95% trifluoroacetic acid. Benzyl halides may be 15 coupled to a photolabile sulfanyl-substituted phenyl ketone anchor.

It will also be appreciated that compounds prepared with the beads and/or process of the present invention may be screened for an activity of interest by methods well known in the art. For example, such screening can be effected by specialised flow 20 cytometry invented from standard techniques such as described e.g. by Needels et al. (1993, Proc. Natl. Acad. Sci. USA 90: 1070010704, incorporated herein by reference), Dower et al. (supra), and Kaye and Tracey (WO 97/15390, incorporated herein by reference).

25 Synthesis of a combinatorial compound library

A combinatorial library in accordance with the present invention is a collection of multiple species of chemical compounds comprised of smaller subunits or mono- 30 mers. Combinatorial libraries come in a variety of sizes, ranging from a few hundred to many hundreds of thousand different species of chemical compounds. There are also a variety of library types, including oligomeric and polymeric libraries comprised of compounds such as peptides, carbohydrates, oligonucleotides, and small organic molecules, etc. Such libraries have a variety of uses, such as immobilization and chromatographic separation of chemical compounds, as well as uses for identifying 35 and characterizing ligands capable of binding an acceptor molecule or mediating a

biological activity of interest.

5 The library compounds may comprise any type of molecule of any type of subunits or monomers, including small molecules and polymers wherein the monomers are chemically connected by any sort of chemical bond such as covalent, ionic, coordination, chelation bonding, etc., which those skilled in the art will recognize can be synthesized on a solid-phase support

10 The term polymer as used herein includes those compounds conventionally called heteropolymers, i.e., arbitrarily large molecules composed of varying monomers, wherein the monomers are linked by means of a repeating chemical bond or structure. The polymers of the invention of this types are composed of at least two subunits or monomers that can include any bi-functional organic or herteronuclear molecule including, but not limited to amino acids, amino hydroxyls, amino isocyanates, diamines, hydroxycarboxylic acids, oxycarbonylcarboxylic acids, aminoaldehydes, nitroamines, thioalkyls, and haloalkyls.

15 In the disclosure of the present invention, the terms "monomer," "subunits" and "building blocks" will be used interchangeably to mean any type of chemical building block of molecule that may be formed upon a solid-phase support. The libraries are not limited to libraries of polymers, but is also directed to libraries of scaffolded small molecules.

25 Various techniques for synthesizing libraries of compounds on solid-phase supports are known in the art. Solid-phase supports are typically polymeric objects with surfaces that are functionalized to bind with subunits or monomers to form the compounds of the library. Synthesis of one library typically involves a large number of solid-phase supports.

30 To make a combinatorial library, solid-phase supports are reacted with a one or more subunits of the compounds and with one or more numbers of reagents in a carefully controlled, predetermined sequence of chemical reactions. In other words, the library subunits are "grown" on the solid-phase supports. The larger the library, the greater the number of reactions required, complicating the task of keeping track of the chemical composition of the multiple species of compounds that make up the

35

library. Thus, it is important to have methods and apparatuses which facilitate the efficient production of large numbers of chemical compounds, yet allow convenient tracking of the compounds over a number of reaction steps necessary to make the compounds.

5

Combinatorial libraries represent an important tool for the identification of e.g. small organic molecules that affect specific biological functions. Due to the interaction of the small molecules with particular biological targets and their ability to affect specific biological functions, they may also serve as candidates for the development of therapeutics. Accordingly, small molecules can be useful as drug leads eventually resulting in the development of therapeutic agents.

10

Because it is difficult to predict which small molecules will interact with a biological target, intense efforts have been directed towards the generation of large numbers, or "libraries", of small organic compounds. These libraries can then be linked to sensitive screens to identify the active molecules.

15

A number of libraries have been designed to mimic one or more features of natural peptides. Such peptidomimetic libraries include phthalimido libraries (WO 97/22594), thiophene libraries (WO 97/40034), benzodiazopene libraries (U.S. Pat. No. 5,288,514), libraries formed by the sequential reaction of dienes (WO 96/03424), thiazolidinone libraries, libraries of metathiazanones and their derivatives (U.S. Pat. No. 5,549,974), and azatide libraries (WO 97/35199) (for review of peptidomimetic technologies, see Gante, J., Angew. Chem. Int. Ed. Engl. 1994, 33, 1699-1720 and references cited therein).

20

25

The present invention also resides in a method of synthesising and deconvoluting a combinatorial library as described herein above. The codes of the plurality of beads are determined preferably before the first reaction step, although codes may be determined at any time before the first pooling step (step (d), cf. method steps cited above).

30

Preferably, every time the plurality of beads is apportioned into reaction vessels, each one of the vessels is analysed to determine which of the detectably distinct beads are in each reaction vessel. A database of all the beads (or corresponding

35

gridspace, supra) can thus be updated to show the synthetic history of the compound synthesised on each bead.

5 During a reaction step, the beads in each reaction vessel are reacted with a building block required to assemble a particular compound. Assembly of compounds from many types of building blocks requires use of the appropriate coupling chemistry for a given set of building blocks. Any set of building blocks that can be attached to one another in a step-by-step fashion can serve as the building block set. The attachment may be mediated by chemical, enzymatic, or other means, or by a
10 combination of these. The resulting compounds can be linear, cyclic, branched, or assume various other conformations as will be apparent to those skilled in the art. For example, techniques for solid state synthesis of polypeptides are described, for example, in Merrifield (1963, J. Amer. Chem. Soc. 35: 2149-2156). Peptide coupling chemistry is also described in "The Peptides", Vol. 1, (eds. Gross, E., and J.
15 Meienhofer), Academic Press, Orlando (1979), which is incorporated herein by reference.

To synthesise the compounds, a large number of the beads are apportioned among a number of reaction vessels. In each reaction, a different building block is coupled
20 to the growing oligomer chain. The building blocks may be of any type that can be appropriately activated for chemical coupling, or any type that will be accepted for enzymatic coupling.

Because the reactions may be contained in separate reaction vessels, even building
25 blocks with different coupling chemistries can be used to assemble the oligomeric compounds (see; The Peptides, op. cit). The coupling time for some of the building block sets may be long. For this reason the preferred arrangement is one in which the building block reactions are carried out in parallel. After each coupling step, the beads on which are synthesised the oligomers or compounds of the library are
30 pooled and mixed prior to re-allocation to the individual vessels for the next coupling step. This shuffling process produces beads with many oligomer sequence combinations. If each synthesis step has high coupling efficiency, substantially all the oligomers on a single bead will have the same sequence. That sequence is determined by the synthesis pathway (building block reactions and the order of
35 reactions experienced by the beads) for any given bead. The maximum length of the

oligomers may be about 50, preferably from 3 to 8 building blocks in length, and in some cases a length of 10 to 20 residues is preferred. Protective groups known to those skilled in the art may be used to prevent spurious coupling (see, The Peptides, Vol. 3, (eds. Gross, E., and J. Meienhofer), Academic Press, Orlando
 5 (1981), which is incorporated herein by reference).

With enough beads and efficient coupling it is possible to generate complete sets of certain oligomers, if desired. The appropriate size of the beads depends on (1) the number of oligomer synthesis sites desired; (2) the number of different compounds
 10 to be synthesised (and the number of beads bearing each oligomer that are needed for screening); (3) the effect of the size of the beads on the specific screening strategies e. g. fluorescence-activated cell sorters (FACS) to be used; and (4) the resolution of the encoding/detection methods employed.

15 Examples

Example 1: Handling and imaging of spatially encoded polymer beads.

A bead sorting apparatus with auxiliaries for controlling the bead sorting, for imaging the beads, and for supplying vacuum was constructed comprising (numbers referring
 20 Fig. 7)

a rotating vacuum container comprising
 a 100mm diameter POM capture disc with 100 equidistant 0,2mm diameter capture holes, arranged along an 80mm diameter circular track running 10mm from the edge
 25 of the capture disc, the capture disc being positioned with its planar surfaces vertical,
 a 100mm outer diameter POM capture disc holder for holding the capture disc and for containing the vacuum inside the vacuum container, and
 a 5mm outer diameter and 3mm inner diameter stainless steel shaft with a hole therein for applying a vacuum,
 30

a vacuum container housing comprising
 a stainless steel cylinder (306) of inner diameter 10,2mm surrounding the vacuum container,

a stainless steel circular back plate with a central through-going hole therein for connecting the shaft of the vacuum container to a stepper motor,
three stainless steel separation plates for separating the dry and wet sections of the interior of the cylinder, each separation plate having one central hole equipped with
5 a sealing bearing for holding the shaft of the vacuum container and ensuring smooth rotation of the vacuum container,
a through-going inlet in the side of the stainless-steel cylinder equipped with a connecting piece and being connecting to a first gear pump (Ismatech MCP-Z) via a 4mm inner diameter flexible tube for applying a vacuum to the vacuum container,
10 a PMMA circular front plate comprising
a 3mm wide and 1mm deep guiding channel centered above the capture holes of the capture disc for guiding the beads,
a measuring section at the 12 o'clock position of the guiding channel comprising three through-going cylindrical holes of 2mm diameter in the guiding plate with polished PMMA cylinders of diameter 2mm and length 2mm inserted therein and arranged such that a bead positioned on the surface of the capture disc and at the
15 center-of-the-measuring-section can be simultaneously illuminated through one cylinder by a laser and imaged from two orthogonal directions through the remaining two cylinders,
20 three water feeding holes in the guiding plate at the respective positions 2.30, 3, and 6 o'clock of the guiding channel equipped with connecting pieces and connected via 2mm inner diameter silicone tubes to a water reservoir with a free surface for maintaining 1bar pressure inside the main volume of the guiding channel,
a bead feeding hole in the guiding plate at the 4.30 o'clock position of the guiding
25 channel equipped with a connecting piece and connected to a 5ml manually operated bead feeding syringe containing an aqueous dispersion of beads,
an unloading section comprising,
a bead removal hole in the guiding plate at the 7.30 o'clock position of the guiding channel equipped with a connecting piece and connected to the one end of a cylindrical unloading bead container, the other end of the unloading bead container being
30 connected to a gear pump (Ismatech Reglo-z) for supplying a vacuum at the removal hole, the unloading bead container further being equipped with a filter for retaining unloaded beads, and/or
a bead stopper inserted in the guiding channel and arranged such that beads are
35 forced away from the capture disc when entering the unloading section,

means for rotating the vacuum container comprising
 a stepper motor (VEXTA PH265-01) (313) mounted on the outside of the back plate
 and being connected to the shaft of the vacuum container through the hole in the
 back plate,

5

bead handling apparatus auxiliaries comprising
 a stepper motor controller (702) that causes the stepper motor to rotate anti-
 clockwise in steps of 0.9° , i.e., 400 steps per round, corresponding to four steps per
 capture hole,

10

a first pulse generator (TTi TGP110) (703) with its main output terminal connected to
 the input of the stepper motor controller whereby it is obtained that the stepper mo-
 tor rotates 0.9° for every electric pulse generated by the the pulse generator,
 means for imaging the beads comprising

15

a blue laser (313) for illuminating the central section of the imaging section,
 two CCD-cameras (705), each CCD-camera being equipped with one image inten-
 sifier (706), one microscope objective (8x magnification, 6mm aperture) (707), and
 one green emission filter (701), the CCD-cameras being arranged such that beads
 can be imaged from two orthogonal directions in the imaging section,

20

a second pulse generator (TTi TGP110) (704) with its input terminal connected to
 the AUX output terminal of the first pulse generator such that one delayed pulse is
 generated by the second pulse generator for every pulse generated by the first pul-
 se generator, the main output terminal of the second pulse generator being con-
 nected to the cameras, the image intensifiers, and a computer such that images
 from the two cameras are simultaneously recorded for every pulse generated by the
 second pulse generator whereby it is obtained that images are recorded when the
 capture disc is at rest in-between every step of the capture disc.

25

The bead sorting apparatus and auxiliaries described above were operated in the
 following way:

30

The first gear pump was started at 2500 rpm whereby a vacuum was generated
 inside the vacuum container whereby water was drawn from the guiding channel
 into the capture holes whereby the pressure inside the guiding channel was lowered
 and whereby water was drawn from the water reservoir into the water feeding ho-
 les.

The second gear pump was started at 20% of maximum rotational speed whereby water was drawn from the unloading section of the guiding channel through the unloading bead container towards the second gear pump.

The first pulse generator was started in continuous single pulse mode at 0.5 seconds between pulses and a pulse width of 0.5 milliseconds whereby the axis of the
5 stepper motor was caused to rotate 0.9° every 0.5 seconds.

The bead feeding syringe was gently shaken in order to evenly disperse the beads in the water whereafter approximately 0.1 ml of the bead dispersion was infused into the guiding channel through the feeding hole.

The second pulse generator was started in delayed triggered pulse mode with a delay of 0.1 seconds and a pulse width of 1.5 milliseconds whereby one pair of images of the central section of the measuring section were recorded for every rotational step of the vacuum container corresponding to four pairs of images for every
10 capture hole passing the measuring section.

After 142 seconds the second pulse generator was stopped whereby the imaging was stopped.

After further 120 seconds the first pulse generator was stop whereby the rotation of the vacuum body was stopped.

The first and second gear pumps were stopped.

The water reservoir was disconnected from the guiding channel.
20

The operation of the bead sorting apparatus described above resulted in a portion of the beads being transported from the bead feeding syringe to the unloading bead container, and in

a sequence of 287 image pairs comprising
25

72 capture image pairs being recorded with a capture hole positioned at the central section of the measuring section and

215 non-capture image pairs being recorded in-between the capture image pairs and with no capture hole positioned at the central section of the measuring section.

In the capture image pairs the number of beads captured at each capture hole was noted and plotted against capture image pair number in Fig. 14. From the figure it can be seen that only two capture states of the capture holes were observed: no bead captured or one bead captured, which demonstrates that indeed single beads are captured by the present method. It is further apparent from the table that the bead
30 frequency is significantly lower at the beginning as well as towards the end of the
35

sequence compared to the bead frequency at the intermediate part of the sequence. The initial low bead frequency can be explained by the fact that it takes a certain time to transport a captured bead from the loading section to the measuring section. The few scattered captured beads at the beginning of the sequence indicate that a few beads were captured downstream from the loading section, i.e., closer to the measuring section. The absence of beads towards the end of the sequence is due to the loading section being emptied for beads.

A sub-sequence of the sequence of capture image pairs are shown in Fig. 13 with capture image pair number and projection, xz or yz, indicated for each image. The fluorescent microparticles embedded in the beads show up in the images as bright spots on a dark background. On the basis of such images the three-dimensional positions of the centres of the microparticles can be determined and from this data the microparticle centre distance matrix be derived. This demonstrates the applicability of the present method for decoding of multiple distance encoded beads.

The present method is easily up-scaled in terms of total number of beads measured by keeping the first and second pulse generators running and by repeating the infusion of suspended beads at suitable time intervals such as every 140 seconds.

Furthermore the throughput of the current method can be increased by lowering the time between pulses generated by the first pulse generator and reducing the time interval between infusion of suspended beads.

For practical purposes the total number of image pairs should be reduced by a factor of four by only recording capture image pairs.

Example 2: Upscaled handling and Imaging of spatially encoded polymer beads.

The bead handling apparatus and auxiliaries described in Example 1 were operated with the following operation parameters:

The first gear pump was running at 2500 rpm.

The second gear pump was running at 40% of maximum rotational speed.

The first pulse generator was running in continuous single pulse mode with 0.08 seconds between pulses and a pulse width 0.5 milliseconds.

The bead feeding syringe was mounted on a syringe pump set to run in continuous withdrawal/infusion mode with volume setting 0.1milliliter and rate setting 1.0ml/min.

It was noted that the actual volume of infused bead dispersion per withdrawal/infusion cycle was substantially less than the nominal value of 0.1milliliter due to

the combined mechanical bias of the syringe mounting and of the flexible plastic syringe itself.

The second pulse generator was running in delayed triggered pulse mode with a delay of 0.1 seconds and a pulse width of 0.5 milliseconds.

- 5 After approximately one minute of operation an apparent steady state with regards to bead capture rate was reached and a 26seconds sequence of image pairs was recorded.

After further two minutes the first pulse generator was stopped.

- 10 The operation of the bead handling apparatus described above resulted in a portion of the beads being transported from the bead feeding syringe to the unloading bead container, and in a sequence of image pairs comprising 80 capture image pairs and 242 non-capture image pairs

The following distribution of beads per capture hole was observed:

18 capture holes with no beads captured,

58 capture holes with one bead captured, and

4 capture holes with two beads captured.

- 20 The 58 single beads captured in the 26 seconds correspond to a throughput of approximately 8.000 beads per hour.

The problem with more than one bead captured at a capture hole can be overcome by sorting away the more than one captured beads by methods described elsewhere in the present invention and run them through the apparatus a second time.

Example 3: High focal depth imaging of spatially encoded beads

- 30 The bead handling apparatus auxiliaries described in example 1 was modified in the following way: One of the 0.8x magnification, 6mm aperture microscopes was replaced by a 10x magnification, 1.5mm aperture microscope.

- 35 The bead handling apparatus described in example 1 and the modified auxiliaries was operated in the same way as described in example 1 with the exception that only images from the camera equipped with the low aperture optics were recorded.

Four images from the resulting image sequence are given in Fig. 15 and show a marked increase in focal depth compared to the images from example 1. It is also clear that the decrease in aperture has led to darker images, as one would expect.

5 Indeed, fluorescence imaging with the use of low aperture optics and exposure times in the millisecond range is a challenging task. However, the dot code clearly appears in the images in figure 15. It can be concluded that the use of low aperture optics and the resulting high focal depth image generation are enabled by the combined use of the bead handling apparatus of the present invention that freeze
10 the movement of the encoded beads and image intensifiers that amplify the emitted light from the fluorescent microparticles by a factor of about 10.000.

Example 4: Total fluorescence based bead sorting

In order to develop novel ligands for use in chromatographic purification of proteins
15 a ligand library is prepared by the following method:

Compound synthesis

200.000 PEGA-type polymer beads with diameters in the range 0.5 – 0.7mm are subjected to a four step solid phase split-process-recombine combinatorial synthesis
20 route involving ten different building blocks per step, whereby approximately 10.000 compounds, here ligands, are generated, each bead carrying one ligand, and each ligand being carried by 20 beads on the average.

In order to evaluate the affinity of the ligands towards a specific protein, the beads
25 are exposed to an aqueous solution of a fluorescence labelled modification of the protein and subsequently weakly adhering fluorescence labelled protein is removed by washing. Now the beads that carry a ligand with high affinity towards the fluorescence labelled protein are strongly fluorescent, whereas beads carrying low affinity ligands are weakly fluorescent or non-fluorescent.

30 The bead handling apparatus auxiliaries described in example 1 is modified in the following way: The microscopes, the intensifiers, and the CCD cameras are replaced by an optical fibre connected at one end to an imaging window of the measuring section and at the other end to a photo-multiplier tube (PMT) equipped
35 with a fluorescence emission filter for blocking the laser light and transmitting the

fluorescence emission and further equipped with an electronic amplifier for amplifying the electronic output from the PMT and an A/D-converter for converting the analogues signal from the amplifier into a digital signal (measuring result).

- 5 The bead handling apparatus from example one is equipped with a sorting section at the 10.30 o'clock position comprising a
- 10 a first cylindrical through-going hole in the guiding plate with a cylindrical high pressure 2mm inner diameter connecting piece (1103) therein comprising a first end extending 5mm above the surface of the guiding plate (408) and connected to the outlet of a sorting valve, such as a 2/2-way mini Flipper Solenoid Valve supplied by bürkert, via a high pressure tube, the state (open/closed) of said valve being controlled by a computer, and the inlet of said valve being connected to a pressurised water source, said pressure being generated by a water pump,
- 15 a second end positioned 0.1mm from the surface of the capture body (416), an interior high pressure volume (1104), a circular 0.5mm diameter high pressure outlet (1105) near the surface of the capture-body-and-positioned-such-that-the-distance-between-the-high-pressure-outlet and a passing capture hole be at its minimum in the time interval between the step-wise motion of the capture holes,
- 20 a second cylindrical through-going hole in the guiding plate with a 3mm inner diameter cylindrical vacuum connecting piece (1106) therein comprising a first end extending from the surface of the guiding plate (408) connected via a tube to a bead filter, said filter being connected to a vacuum via a tube, said vacuum being generated by a water pump,
- 25 a second end positioned 0.1 mm from the surface of the capture body, an interior vacuum volume (1101) with a 3mm inner diameter, a circular 1mm diameter vacuum outlet (1102) near the surface of the capture body and positioned opposite the high pressure outlet of the high pressure connecting piece, said vacuum outlet connecting the vacuum volume to the guiding channel.
- 30 The bead handling apparatus described in example 1 and the modified auxiliaries is operated in the same way as described in example 1 with the exception that instead of imaging the beads in the measuring section their total fluorescence is measured by the photo-multiplier tube. The measuring result is fed to a computer that
- 35 generates an analysis result, in this case a sorting result, for each bead being

measured by the following scheme: if the measuring result is greater than a preset value the sorting result = 1, whereas, if the measuring result is less than or equal to the value, the sorting result = 0.

- 5 Each bead, its associated sorting result, and its position on the capture disc from the measuring section and forward is recorded by a computer.

At the sorting section each bead is removed from its capture hole, by briefly (50milliseconds) opening the sorting valve, and transferred to the second bead filter (309) if its associated sorting result = 1, whereas the bead is left on the capture disc if its analysis result = 0,

At the unloading section all beads that were not removed at the sorting section are removed from the capture disc and transferred to the first bead filter (312),

15 In this way, two fractions of beads are generated, one fraction containing beads with a total fluorescence above the specified value, i.e. a fraction of beads carrying ligands with high affinity towards the fluorescence labelled protein and one fraction containing beads with a total fluorescence below the specified value, i.e. a fraction of beads carrying ligands with low affinity towards the fluorescence labelled protein.

Now, the chemical structure of the ligands carried by the fraction of strongly fluorescent beads can be analysed and determined to some degree of certainty by methods known by those skilled in the art. Prior art instrumentation and methods for total fluorescence based bead sorting exist, however, the performance of the apparatus and method of the present invention to our best knowledge supersedes prior art disclosures in terms of accuracy, i.e., fraction of correctly sorted beads, due to the precise spatial control of beads of the present invention.

30 The preset value involved in the generation of the sorting result must be sufficiently high for generating only a small fraction of beads with sorting result = 1, such as 1% or less, such as 0.1% or less, whereby it is obtained that only beads carrying very high affinity ligands are separated. A proper preset value can be found by a trial and error method: After exposure to fluorescence labelled protein and washing a random fraction of the beads are run through the bead handling apparatus with a random

preset value. If the fraction of beads with sorting result = 1 is too low the experiment is repeated with a lower preset value, whereas, if the fraction of beads with sorting result = 1 is too high the experiment is repeated with a higher preset value. This procedure is repeated until a proper preset value has been found.

5

The above method can also be used within drug discovery for synthesis and screening of drug candidates. In the case of drug discovery the compounds synthesised on the beads can be drug candidates, and can be screened against a relevant biological compound, such as e.g. an antibody.

10

The above method can further be used within catalyst development for synthesis and screening of catalyst candidates, in which case the compounds synthesised on the beads can be catalyst candidates, and can be screened against a relevant set of reactants.

15

Furthermore, the above method or the bead sorting by itself finds use within diagnostics; e.g. for screening biological fluids with regards to the presence of specific DNA or DNA-analogue (e.g. RNA, m-RNA, LNA) sequences. In the case of diagnostics the beads can carry single stranded DNA or DNA-analogue sequences, and can be screened against a biological compound comprising single stranded DNA or DNA-analogue sequences.

20

Example 5: Combined bead identification and total fluorescence bead sorting

25

The method for ligand development described in example 4 involves the difficult step of determining the chemical structure of the high affinity ligands. This step is by far the most time consuming, and often leads to ambiguous results. However, the need for this step can be eliminated by keeping track of each bead through its combinatorial synthesis route, i.e. its individual reaction vessel sequence, and after bead sorting identifying the beads carrying high affinity ligands. In this way the chemical structures of the high affinity ligands is derived from the track of its host bead.

30

The method for compound synthesis described in example 4 is repeated but in this example with spatially encoded PEGA-type beads and with the added steps of

- fluorescence imaging of all beads entering each reaction vessel in each synthesis step by the method, apparatus, and auxiliaries described in example 2,
- storing the resulting image pair sequences, each such sequence corresponding to a unique combination of synthesis step number and reaction vessel number, on a storage medium in separate files, each such file being named according to synthesis step number and reaction vessel number,
- identifying the majority, such as more than 90%, such as more than 99%, of all beads of all resulting image pair sequences by the methods for identification of spatially encoded beads described elsewhere,
- fluorescence imaging of the high total fluorescence beads by the method, apparatus, and auxiliaries described in example 2,
- identifying each bead of the high total fluorescence bead fraction resulting from the total fluorescence based sorting procedure, on the basis of its associated fluorescence image pair by the methods for identification of spatially encoded beads described elsewhere,
- tracking each bead of the high total fluorescence bead fraction resulting from the total fluorescence based sorting procedure through the combinatorial synthesis.

By this method the combinatorial synthesis route of each bead carrying a high affinity ligand is determined, on which basis the chemical structure of its ligand can be derived, whereby the undesired ligand analysis is avoided.

- It is preferred that the emission wavelength of the dot-code be sufficiently separate from the wavelength of the protein fluorescence marker, such as e.g. more than 100nm separate, for avoiding interference between the bead imaging and the total fluorescence measurement.

Example 6: Preparing spatially encoded polymer beads

Spatially encoded PEGA-type polymer beads are prepared by inverse phase copolymerisation at 70°C of acrylamide-end-capped polyethyleneglycol and acrylamide in a 1:1 ratio in 2% (w/w) aqueous sorbitan monolaurate in the presence of 0.6% (w/w) di-methylformamide swelled Oregon green (supplied by Molecular

probes) dyed microspheres (TentaGel M30202 supplied by RAPP Polymere). After polymerisation the beads were washed with demineralised water and sieved. The resulting 0.5 – 0.7mm diameter fraction is isolated and analysed in the apparatus described in example 1. 80% of the encoded beads comprise from 4 to 10 microparticles.

5

Claims

1. Apparatus for measuring a plurality of optically detectable beads, such as polymer beads, said apparatus comprising
- 5
- a) a vacuum container comprising at least one planar capture body capable of rotating around a central axis,
- wherein said capture body comprises a plurality of through-going inlets,
- 10
- wherein the diameter of each inlet is smaller than the average diameter of the beads to be measured and/or analysed and/or sorted,
- b) a pressure controlling device capable of controlling the pressure in the vacuum container, and
- 15
- c) a device for rotating the vacuum container around the axis of the capture disc.
- 20
- d) a device for measuring at least one property of at least one bead
2. The apparatus according to claim 1 wherein the ratio R between a) the average diameter of the beads being manipulated, and b) the diameter of the through-going inlets, $R=a/b$, is more than 2, such as more than 4, for example more than
- 25
- 6, such as more than 8, for example more than 10, such as more than 12, for example more than 14, such as more than 16, for example more than 18, such as more than 20, for example more than 25, such as more than 30, for example more than 35, such as more than 40, for example more than 50, and preferably less than 100.
- 30
3. The apparatus according to any of claims 1 and 2, wherein the capture body is a planar disc.
4. The apparatus according to any of claims 1 to 3 wherein the distance between
- 35
- the axis of rotation of the capture body and each of the through-going inlets of

the capture body is the same for each of the through-going inlets of the capture body.

- 5 5. The apparatus according to claim 4 wherein the distance between neighbouring through-going inlets is the same for all pairs of neighbouring through-going inlets.
- 10 6. The apparatus according to any of claims 1 to 5 further comprising a circular capture disc support supporting the capture disc at a distal end and being connected at a proximal end to a hollow shaft, wherein the hollow shaft is fitted with a shaft opening so that a vacuum can be applied to the interior of the vacuum container,
- 15 7. The apparatus according to claim 6 further comprising a vacuum container housing comprising an outer cylinder comprising an opening for connecting the shaft hole with the pressure controlling device, and a guiding plate comprising at least one opening allowing the through-going inlets to be accessible to beads to be loaded onto the capture disc, said guiding plate being attached to the top part of the outer cylinder, thereby defining in the space between the guiding plate and the capture disc a guiding channel for harbouring beads, said guiding plate confining the vacuum container to the interior of the vacuum container housing.
- 20 8. The apparatus according to any of claims 1 to 7, wherein the vacuum container is connected to a device for rotating the vacuum container, such as a stepper motor, operably linked to a momentum transfer split for transferring the momentum from the stepper motor to the vacuum container thereby causing the vacuum container to rotate in a controlled step-wise fashion.
- 25 9. The apparatus according to any of claims 1 to 8 wherein the pressure controlling device comprises a pump.
- 30 10. The apparatus according to any of claims 1 to 9, wherein the measuring device comprises at least one source of illumination and at least one image capturing device.

35

11. The apparatus according to claim 10 wherein the source of illumination comprises at least one laser
- 5 12. The apparatus according to claim 11 wherein the at least one laser is a focussed scanning laser.
13. The apparatus according to any of claims 10 to 12, wherein the at least one image capturing device comprises at least one CCD camera.
- 10 14. The apparatus according to any of claims 10 to 13 further comprising at least one pulse generator, at least one image intensifier, and at least one fluorescence filter.
- 15 15. The apparatus according to any of claims 13 and 14 comprising one pulse generator, two image intensifiers, two fluorescence filters, and two CCD-cameras.
16. The apparatus according to any of claims 1 to 9, wherein the measuring device comprises at least one spectrophotometer.
- 20 17. The apparatus according to any of claims 1 to 9, wherein the measuring device comprises at least one source of illumination and at least one photo-sensor.
18. The apparatus according to claim 17, wherein the at least one source of illumination comprises at least one laser.
- 25 19. The apparatus according to any of claims 17 and 18, wherein the at least one photo-sensor comprises a photo-multiplier tube.
- 30 20. The apparatus according to any of claims 17 to 19 further comprising at least one optical fibre and at least one fluorescence filter
21. The apparatus according to any of claims 19 and 20 comprising one laser, one optical fibre, one fluorescence filter, and one photo-multiplier tube.

22. The apparatus according to any of claims 1 to 21 further comprising an analysing device for analysing results being generated from the measurement of the at least one property of the at least one bead, wherein said analysis enables individual beads to be characterised and/or identified and optionally also sorted.
- 5
23. The apparatus according to claim 22, wherein the analysing device comprises a computer capable of executing a data analysis program.
24. The apparatus according to any of claims 22 to 23 further comprising a data storage medium for storing data generated by the measuring device and/or analysing device.
- 10
25. The apparatus according to any of claims 22 to 24 further comprising at least one device for sorting a plurality of beads on the basis of the result generated by the analysing device.
- 15
26. The apparatus according to claim 25, wherein the sorting device comprises a plurality of sorting channels for separating the plurality of beads into fractions thereof and at least one bead displacement device for displacing at least one bead of the plurality of beads from the capture body in accordance to the result generated by the analysing device.
- 20
27. The apparatus according to claim 26, wherein the at least one bead displacing device comprises a cylinder for physically removing at least one bead from its capture hole by suction and a valve for connecting and disconnecting a vacuum to the inside of the cylinder.
- 25
28. The apparatus according to claim 26, wherein the at least one bead displacing device comprises a bead displacing body for physically removing at least one bead from its capture hole, and a device for spatially manipulating the bead displacing body.
- 30
29. The apparatus according to claim 28, wherein the bead displacing body comprises a magnetic material, and wherein the device for spatially manipulating the bead displacement body comprises an electromagnet.
- 35

- 5 30. The apparatus according to claim 26, wherein the at least one bead displacing device comprises a cylinder for blowing away at least one bead from its capture hole, a high pressure fluid source for generating the flow for blowing away the at least one bead from its capture hole, and a valve for connecting said cylinder to said high pressure fluid source.
- 10 31. The apparatus according to any of claims 1 to 30 further comprising a treating device for treating at least one bead optionally having been subjected to measuring or analysing.
- 15 32. The apparatus according to claim 31, wherein the treating device comprises a laser for etching at least one bead or part thereof.
33. The apparatus according to claim 31, wherein the treating device comprises a laser for bleaching at least one bead or part thereof.
- 20 34. The apparatus according to claims 31 to 33, wherein the treating device comprises a plurality of compartments comprising chemical building blocks said compartments being connected to the treating section by at least one tube for diverting individual chemical building blocks to the treating section.
- 25 35. The apparatus according to any of the previous claims further comprising a bead loading device for loading beads onto the capture disc.
- 30 36. The apparatus according to claim 35, where the bead loading device comprises a syringe pump comprising a dispersion of beads to be loaded onto the capture disc.
37. The apparatus according to any of the previous claims further comprising a bead unloading device for unloading beads from the capture disc.
- 35 38. The apparatus according to claim 37, wherein the bead unloading device comprises a blocking device positioned in the track defined by the rotating through-going inlets of the capture body and at a distance less than half the average

bead diameter from the surface of the capture disk for physically removing the beads from the through-going inlets.

- 5 39. The apparatus according to claim 37, wherein the bead unloading device comprises a suction device for physically removing the beads from the through-going inlets and subsequently from the capture body.
- 10 40. The apparatus according to claim 37, wherein the bead unloading device comprises a blocking device for physically removing the beads from the through-going inlets and a suction device for removing the beads from the capture body.
- 15 41. The apparatus according to any of claims 39 and 40, where the suction device comprises a pump and a filter for retaining beads removed from the capture body.
- 20 42. The apparatus according to any of the previous claims further comprising an excess bead flushing device for flushing away non-captured beads from captured beads.
- 25 43. The apparatus according to claim 42, where the excess bead flushing device comprises a pump and a dispersion liquid outlet positioned adjacent to the track defined by the rotating through-going inlets in the capture disc at a distance greater than the average bead diameter from the surface of the capture disc.
- 30 44. The apparatus according to any of claims 7 to 43 wherein the guiding plate comprises a plurality of openings each such opening defining a section selected from the group consisting of loading section for loading beads onto the capture disc and unloading section for removing beads from the capture disc.
- 35 45. The apparatus according to claim 44 further comprising guiding plate openings selected from the group consisting of excess bead unloading section for unloading excess beads, flushing section for flushing away non-captured beads from captured beads, and sorting section for separating at least one bead from the plurality of beads.

- 5 46. The apparatus according to claims 44 and 45, wherein the orientation of sections with respect to each other, in the direction of the rotation of the capture disc, is defined by the following order: excess bead unloading section, when present, bead loading section, excess bead flushing section, when present, sorting section, when present, and bead unloading section.
- 10 47. The apparatus according to any of claims 44 to 46 wherein the guiding plate further comprises at least one measuring section for measuring at least one property of at least one bead.
48. The apparatus according to claim 47, wherein the at least one measuring section of the guiding plate comprises at least one transparent window for allowing the measuring device to record at least one property of at least one bead.
- 15 49. A method for measuring at least one property of at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of
- i) providing a plurality of beads each comprising at least one label,
 - 20 ii) providing an apparatus for measuring at least one property of at least one bead according to any of claims 1 to 48,
 - iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in
25 step ii),
 - iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container, and
 - 30 v) using the measuring device of the apparatus for measuring at least one property of at least one bead.

50. A method for analysing data generated by measuring at least one property of at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- 5 i) providing a plurality of beads each comprising at least one label,
- ii) providing an apparatus for analysing at least one property of at least one bead according to any of claims 22 to 48,
- 10 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- iv) rotating the capture body to transfer at least one bead from the loading
15 section of the vacuum container to the measuring section of the vacuum container,
- v) using the measuring device of the apparatus for measuring at least one property of at least one bead, and
- 20 vi) analysing data generated by the measuring device for measuring at least one property of at least one bead.

51. A method for identifying at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- 25 i) providing a plurality of beads each comprising at least one label,
- ii) providing an apparatus for analysing at least one property of at least one bead according to any of claims 22 to 48,
- 30 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),

35

- iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
 - 5 v) using the measuring device of the apparatus for measuring at least one property of at least one bead, and
 - vi) using the analysing device for analysing data generated by the measuring device for measuring at least one property of at least one bead, and
 - 10 vii) identifying at least one bead of a plurality of beads by analysing the data generated by the measuring device for measuring at least one property of at least one bead.
- 15 52. A method for sorting at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of
- i) providing a plurality of beads each comprising at least one label,
 - 20 ii) providing an apparatus for sorting at least one bead according to any of claims 25 to 48,
 - iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in
 - 25 step ii),
 - iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
 - 30 v) using the measuring device of the apparatus for measuring at least one property of at least one bead,
 - vi) using the analysing device for analysing data generated by the measuring
 - 35 device for measuring at least one property of at least one bead, and

- vii) sorting the at least one bead of a plurality of beads based on the result of the analysis performed in step vi).

5 53. A method for sorting at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- i) providing a plurality of beads each comprising at least one label,
- 10 ii) providing an apparatus for sorting at least one bead according to any of claims 25 to 48,
- iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in
- 15 step ii),
- iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
- 20 v) using the measuring device of the apparatus for measuring at least one property of at least one bead, and
- vi) using the analysing device for analysing data generated by the measuring device for measuring at least one property of at least one bead,
- 25 vii) identifying at least one bead of a plurality of beads by analysing the data generated by the measuring device for measuring at least one property of at least one bead, and
- 30 viii) sorting the at least one bead of a plurality of beads based on the identification performed in step vii).

54. A method for treating at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- 5 i) providing a plurality of beads each comprising at least one label,
- ii) providing an apparatus for treating at least one bead according to any of claims 31 to 48,
- 10 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
- 15 v) using the measuring device of the apparatus for measuring at least one property of at least one bead,
- 20 vi) analysing data generated by the measuring device for measuring at least one property of at least one bead, and
- vii) treating at least one bead of a plurality of beads based on the result of the analysis performed in step vi).

25

55. A method for treating at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- 30 i) providing a plurality of beads each comprising at least one label
- ii) providing an apparatus for treating at least one bead according to any of claims 31 to 48,

- iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- 5 iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
- v) using the measuring device of the apparatus for measuring at least
10 one property of at least one bead, and
- vi) using the analysing device for analysing data generated by the measuring device for measuring at least one property of at least one
15 bead,
- vii) identifying at least one bead of a plurality of beads by analysing the data generated by the measuring device for measuring at least one
20 property of at least one bead, and
- viii) treating at least one bead of a plurality of beads based on the identification obtained in step vii).

56. A method for treating at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- 25 i) providing a plurality of beads each comprising at least one label,
- ii) providing an apparatus for treating at least one bead according to any of claims 31 to 48,
- 30 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),

- iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
- 5 v) using the measuring device of the apparatus for measuring at least one property of at least one bead,
- vi) analysing data generated by the measuring device for measuring at least one property of at least one bead,
- 10 vii) sorting the at least one bead of a plurality of beads based on the result of the analysis performed in step vi), and
- 15 viii) treating the at least one bead of a plurality of beads having been sorted in step vii).

57. A method for treating at least one bead of a plurality of beads, such as polymer beads, said method comprising the steps of

- 20 i) providing a plurality of beads each comprising at least one label,
- ii) providing an apparatus for treating at least one bead according to any of claims 31 to 48,
- 25 iii) contacting at least one bead of the plurality of beads provided in step i) with the vacuum container capture body of the apparatus provided in step ii),
- 30 iv) rotating the capture body to transfer at least one bead from the loading section of the vacuum container to the measuring section of the vacuum container,
- v) using the measuring device of the apparatus for measuring at least one property of at least one bead, and

35

- vi) using the analysing device for analysing data generated by the measuring device for measuring at least one property of at least one bead,
- 5 vii) identifying at least one bead of a plurality of beads by analysing the data generated by the measuring device for measuring at least one property of at least one bead,
- viii) sorting the at least one bead of a plurality of beads based on the
10 identification performed in step vii), and
- ix) treating the at least one bead of a plurality of beads having been sorted in step vii).
- 15 58. The method of any of claims 49 to 57, wherein the measuring of at least one property of at least one optically detectable bead located in the measuring section of the apparatus comprises the steps of
 - i) activating a source of illumination,
 - 20 ii) capturing at least one image of the at least one optically detectable bead, and
 - iii) optionally storing the at least one image of the at least one optically
25 detectable bead.
- 59. The method of any of claims 50 to 57, wherein the optically detectable beads to be analysed comprises a plurality of immobilised microparticles each comprising at least one label.
- 30 60. The method of claim 59, wherein the analysis of data generated by measuring at least one property of at least one optically detectable bead comprises determining spatial positions of a plurality of immobilised microparticles in each bead, wherein said microparticles are defined by at least one set of coordinates

(x_n, y_n, z_n) , where $n = 1, 2, \dots, N$; N being the total number of microparticles of the at least one bead.

- 5 61. The method of claim 60, wherein the determination of the spatial positions (x_n, y_n, z_n) of each immobilised microparticle of the at least one bead comprises the steps of
- 10 i) recording at least two 2D-projections of the microparticles of each bead, and
 - 15 ii) determining, on the basis of the relative positions in space of centers (x, y, z) of the immobilised microparticles, either a) the distance matrix for individual microparticles, or b) a set of geometrical figures, such as triangles, derivable from the relative positions in space of centers (x, y, z) of the immobilised microparticles.
- 20 62. The method of any of claims 60 and 61, wherein 3 2D-projections are recorded along 3 orthogonal axis x , y and z to generate 3 sets of 2D-coordinates (y, z) , (x, z) and (x, y) , respectively, from which the 3D-coordinates (x, y, z) of a microparticle center can be derived.
- 25 63. The method of claim 62, wherein a plurality or stack of 2D projections are generated by confocal or focal microscopy to recreate the 3D image matrix of the bead from which the relative microparticle position (x, y, z) in space can be determined.
- 30 64. The method of any of claims 60 to 63, wherein the step of analysing data generated by the measuring device comprises using at least one focussed scanning laser for detection of relative positions in space of centers (x, y, z) of immobilised microparticles.
- 35 65. The method of claim 64, wherein coordinates x and y of a microparticle position are determined by fast scanning two orthogonally aligned lasers over three cross sections of a bead attached to the capture body.

66. The method of any of claims 60 to 63, wherein coordinates x and y of a micro-particle position in a bead are determined by using a single laser and a rotating mirror which reflects, via 2 or 3 geometrically arranged static mirrors, the laser beam along 2 or 3 orthogonal axes.

5

67. The method of claim 60, wherein the analysis comprises a determination of the at least one distance matrix of at least one bead comprising a plurality of spatially immobilised microparticles comprising an optically detectable label, wherein the distance matrix is determined by

10

i) activating at least one source of illumination of the measuring device,

15

ii) recording at least one image of the at least one bead by sending substantially simultaneously a pulse generated by a pulse generator to both a) at least one image intensifier of the analysing device, and b) at least one CCD camera of the analysing device capable of recording said at least one image, and

20

iii) determining for individual beads a distance matrix based on the at least one image obtained for each bead in step ii

25

68. The method of any of claims 61 to 67, wherein a set of multiple distance matrices is determined for a subpopulation of the beads based on more than one set of individual distances recorded for the subpopulation of beads.

69. The method of any of claims 61 and 68, wherein each distance matrix is recorded individually.

30

70. The method of any of claims 61 to 69, wherein at least one image of each bead is recorded per second.

35

71. The method of any of claims 61 to 70, wherein a total of more than 4000 beads are measured per hour, such as more than 5000 beads per hour, for example more than 10000 beads per hour, such as more than 15000 beads per hour, for

example more than 20000 beads per hour such as more than 25000 beads per hour, for example more than 30000 beads per hour such as more than 40000 beads per hour, for example more than 50000 beads per hour such as more than 60000 beads per hour, for example more than 70000 beads per hour, such as more than 80000 beads per hour, for example more than 90000 beads per hour such as more than 100000 beads are recorded per hour.

5

10

72. The method of any of claims 51, 53, 55, and 56, wherein the optically detectable beads to be identified comprises a plurality of immobilised microparticles each comprising at least one label.

15

20

25

30

35

73. The method of claim 71, wherein the step of identifying at least one bead of a plurality of beads comprises the steps of

- i) determining at least one set of spatial positions of three or more microparticles in the at least one bead to be identified,
- ii) deriving from the at least one set of spatial positions, a set of corresponding matrices of the distances between the three or more microparticles,
- iii) deriving from the corresponding set of matrices all possible triangles defined by the three or more microparticles,
- iv) identifying said at least one identifiable spatially encoded bead based on comparison of all possible triangles for said bead with all sets of possible triangles for the plurality of beads.

74. The method of any of claims 60 to 73 comprising the further step of performing a digital 3D registration of at least some of the identified beads, said 3D registration comprising generating a digital 3D reconstruction of the at least some identified beads based on the orthogonal pairs of images, and wherein the identification of individual beads is aided by an analysis of which of the generated 3D reconstructions represents the best fit to the original 3D registration.

- 5 75. The method of any of claims 54 to 57, wherein the step of treating at least one bead of a plurality of beads comprises one or more of the treating steps selected from the group consisting of etching the at least one bead, bleaching the at least one bead, heating the at least one bead, and exposing the at least one bead to at least one chemical building block under reaction conditions suitable for the reaction of said building block.
- 10 76. A method for recording individual reaction steps involved in the step-wise synthesis of a chemical compound on an optically detectable bead, said method comprising the steps of
- 15 a) spatially immobilizing a plurality of microparticles in each optically detectable bead,
 - b) isolating, preferably by automated selection, at least a subset of the spatially encoded beads provided in step a),
 - 20 c) recording and storing a distance matrix or a geometrical figure derivable from the distance matrix for each bead, wherein said distance matrix or geometrical figure is preferably generated by any of the methods disclosed herein,
 - d) stepwise synthesising chemical compounds on functional groups present on the encoded beads, wherein the identity of each bead is recorded and stored for each reaction step, and
 - e) obtaining for each bead a record of the individual reaction steps.
- 25 77. A method for identifying a chemical compound having been synthesised on an optically detectable bead comprising a plurality of spatially immobilised microparticles comprising at least one label, said method comprising the steps of
- 30 a) performing the recording method of claim 75,
 - b) selecting beads of interest by using an assay or a diagnostic screen selective for the chemical compound having been synthesized on the bead,
 - c) recording the distance matrix for each of the beads selected in step b),

- d) comparing the distance matrix recorded in step c) with all of the distance matrices recorded and stored in step c) of claim 75, thereby obtaining information about the identity of the selected bead,
 - 5 e) identifying for each selected bead the sequence of individual steps having lead to the synthesis of the chemical compound, and
 - f) identifying, based the sequence of individual steps, the chemical structure of the compound.
- 10 78. The method of claim 77, wherein the assay is a binding assay performed by measuring the binding of a protein to a ligand bound to the polymer matrix.
79. The method of claim 77, wherein the assay is performed by measuring an enzyme activity on a substrate bound to the polymer matrix.
- 15 80. The method of claim 77, wherein the assay is performed by measuring enzyme inhibition of a molecule bound to the polymer matrix.
81. The method of claim 77, wherein the assay is performed by measuring receptor interaction with a compound bound to the polymer matrix.
- 20 82. The method of any of claims 77 to 81, wherein said plurality of beads comprise a fluorescence detectable marker.
- 25 83. The method of claim 82, wherein said fluorescence detectable marker is detectable by two photon fluorescence microscopy.
84. The method of claim 82, wherein said fluorescence detectable marker is detectable by one photon fluorescence microscopy.
- 30 85. The method of claim 82, wherein said fluorescence detectable marker is a UV or visible light-excitabile microparticles.

86. The method of any of claims 49 to 75, wherein the at least one bead comprises a plurality of spatially immobilised microparticles each comprising at least one label, wherein each microparticle is individually detectable.
- 5 87. The method of any of claims 49 to 75, wherein the at least one bead has different optical or spectroscopic properties from those of the immobilised microparticles each comprising at least one label.
- 10 88. The method of claim 86, wherein the size distribution of immobilised microparticles is mono-disperse.
89. The method of claim 86, wherein the size distribution of immobilised microparticles is hetero-disperse.
- 15 90. The method of claim 86, wherein the immobilised microparticles are spherical.
91. The method of claim 86, wherein the immobilised microparticles are irregular microparticles.
- 20 92. The method of claim 86, wherein the at least one bead comprises at least 2 microparticles.
93. The method of claim 86, wherein the at least one bead comprises 3 or more microparticles.
- 25 94. The method of claim 86, wherein the at least one bead comprises 4 or more microparticles.
- 30 95. The method of any of claims 86 to 94, wherein the at least one bead comprises 10 or less microparticles.
96. The method of any of claims 86 to 94, wherein the at least one bead comprises less than 5 microparticles.

97. The method of any of claims 86 to 96, wherein the at least one bead is essentially spherical.
- 5 98. The method of any of claims 86 to 97, wherein the at least one bead comprises at least two of said microparticles, and wherein said at least two microparticles have essentially the same diameter.
- 10 99. The method of any of claims 86 to 98, wherein all of said microparticles are essentially mono-disperse.
100. The method of any of claims 86 to 99, wherein all of said microparticles are less than 10 micrometer in diameter.
- 15 101. The method of any of claims 86 to 100, wherein all of said microparticles are less than 5 micrometer in diameter.
102. The method of any of claims 86 to 101, wherein all of said microparticles are less than 1 micrometer in diameter.
- 20 103. The method of any of claims 86 to 102, wherein all of said microparticles are less than 0.1 micrometer in diameter.
104. The method of any of claims 86 to 103, wherein all of said microparticles comprise a spectroscopically detectable marker.
- 25 105. The method of any of claims 86 to 103, wherein all of said microparticles comprise a fluorescence detectable marker.
- 30 106. The method of claim 105, wherein the fluorescence detectable marker is selected from the group consisting of dyes based on the structure of fluorescein, Oregon green, rhodamine, aminobenzoic acid, AlexaTM probes, BODIPY-dyes, cascade blue dye, coumarine, naphthalenes, dansyl, indoles, pyrenes pyridyloxazole, cascade yellow dye, Dapoxyl Dye, Fluorescamine, aromatic ortho dialdehydes, OPA and NDA, ATTO-Tag's, 7-Nitrobenz-2-Oxa-1,3-Diazole, and derivatives thereof.
- 35

107. The method of claim 105, wherein the fluorescence detectable marker is selected from the group consisting of fluorescent organic poly-cyclic compounds, conjugated vinylic compounds, hetero-cyclic transition metal complexes, rare earth metal compounds, inorganic oxides and glasses.
108. The method of claim 105, wherein the fluorescence detectable marker is detectable by two photon fluorescence spectroscopy.
109. The method of claim 105, wherein the fluorescence detectable marker is detectable by one photon fluorescence spectroscopy.
110. The method of claim 105, wherein the fluorescence detectable marker is detectable by time-correlated photon fluorescence spectroscopy.
111. The method of any of claims 105 to 110, wherein the bead is optically transparent in the optical excitation ranges of said fluorescent marker and/or the emission wavelength ranges of said fluorescent marker.
112. The method of claim 111, wherein the bead comprises a polymer matrix selected from the group consisting of polyethers, polyvinyls, polyacrylates, polyacrylamides, polystyrenes, polycarbonates, polyesters, polyamides, and combinations thereof.
113. The method of claim 111, wherein the bead comprises a material selected from the group consisting of silica, alumina, and titania.
114. The method of any of claims 111 and 112, wherein the bead comprises a polymer matrix selected from the group consisting of SPOCC, PEGA, HYDRA, POEPOP, PEG-polyacrylate copolymers, polyether-polyamine copolymers, cross-linked polyethylene di-amines, and combinations thereof.
115. The method of claim 111, wherein the beads comprise a marker, which is detectable by fast spectroscopic techniques other than fluorescence spectroscopy.

116. The method of claim 115, wherein the fast spectroscopic technique comprise Infrared spectroscopy, raman spectroscopy, visible light spectroscopy, UV spectroscopy, electron spin resonance, and nuclear magnetic resonance.
- 5 117. The method of claim 111, wherein said beads comprise a marker, which is detectable by fast detection techniques other than spectroscopy such as light scattering, reflection, diffraction or light rotation.
- 10 118. The method of any of claims 86 to 117, wherein the marker is detected by probing the marker with a range of frequencies differing by less than 10% based on the numerical highest frequency value.
- 15 119. The method of any of claims 86 to 118, wherein the marker is detected by probing the marker with one or more predetermined frequencies.
- 20 120. The method of any of claims 86 to 119, wherein the ratio $R = a/b$ between a) the volume of the bead and b) the average volume of the microparticles is in the range of from 10000000:1 to 10:1.
- 25 121. The method of any of claims 86 to 119, wherein the ratio $R = a/b$ is in the range of from 1000000:1 to 30:1.
122. The method of any of claims 86 to 119, wherein the ratio $R = a/b$ is in the range of from 1000000:1 to 100:1.
123. The method of any of claims 86 to 119, wherein the ratio $R = a/b$ is in the range of from 1000000:1 to 200:1.
- 30 124. The method of any of claims 86 to 119, wherein the ratio $R = a/b$ is in the range of from 1000000:1 to 1000:1.
- 35 125. The method of any of claims 86 to 119, wherein the ratio $R = a/b$ is in the range of from 100000:1 to 1000:1.

126. The method of any of claims 86 to 119, wherein the ratio $R = a/b$ is in the range of from 100000:1 to 2000:1.
- 5 127. The method of any of claims 86 to 119, wherein the at least one bead has an average volume of $0.000001 \mu\text{L} - 50 \mu\text{L}$.
128. The method of any of claims 86 to 119, wherein the at least one bead has an average volume of $0.00001 \mu\text{L} - 5 \mu\text{L}$.
- 10 129. The method of any of claims 86 to 119, wherein the at least one bead has an average volume of $0.001 \mu\text{L} - 1 \mu\text{L}$.
130. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads are individually identifiable.
- 15 131. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads comprises at least 10^2 individually identifiable beads.
- 20 132. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads comprises at least 10^3 individually identifiable beads.
- 25 133. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads comprises at least 10^5 individually identifiable beads.
- 30 134. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads comprises at least 10^7 individually identifiable beads.
- 35 135. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads comprises at least 10^9 individually identifiable beads.

136. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads comprises at least 10^{11} individually identifiable beads.
- 5 137. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads comprises at least 10^{13} individually identifiable beads.
- 10 138. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads comprises at least 10^{15} individually identifiable beads.
- 15 139. The method of any of claims 86 to 129, wherein the plurality of different, spatially encoded, beads comprises at least 10^{17} individually identifiable beads.
- 20 140. The method of any of claims 86 to 139, wherein each bead comprises at least one site for functionalisation to which a ligand or a bioactive species can be attached.
- 25 141. The method of claim 140, wherein the site for functionalisation comprises a reactive group or a scaffold comprising two or more of such reactive groups.
- 30 142. The method of any of claims 49 to 141 comprising the further step of attaching a plurality of ligands or bioactive species to the bead, wherein different ligands or different bioactive species are attached to different beads, wherein more than about 95% of all of said different beads are individually identifiable.
143. The method of claim 142, wherein essentially all of said beads are individually identifiable.
144. The method of any of claims 49 to 142, wherein the optically detectable microparticle is selected from the group consisting of light reflecting micro-

particles, light absorbing microparticles, microparticles comprising one or more dyes, fluorescent microparticles, and auto-fluorescent microparticles.

5 145. The method of any of claims 49 to 144, wherein the optically detectable microparticles comprise fluorescence labelled polyethylene-grafted polystyrene microspheres.

10 146. The method of claim 145, wherein the diameter of the microspheres are from 10 to 30 micrometers, such as e.g. 10 micrometers, 20 micrometers, or 30 micrometers.

15 The method of claim 58, wherein the source of illumination is a laser, and wherein the optical power of the laser is in the range of from 1 mWatt to preferably less than about 500 mWatt, such as about 10 mWatt, for example about 50 mWatt, such as about 200 mWatt, for example about 100 mWatt.

20 148. The method of claim 147, wherein the wave length of the laser is in the range of from about 450 nm to preferably less than 700 nm, such as about 500 nm, for example about 600 nm.

25 149. The method of claim 66, wherein the exposure time of the image intensifiers and the CCD cameras is preferably in the range from about 0.1 millisecond to 100 milliseconds, such as in the range from 1 millisecond to 10 milliseconds, for example 5 milliseconds.

30 150. The method of any of claims 49 to 149, wherein the size distribution of the particles or beads is in the range of from 0.1 millimeter to preferably less than 2 millimeter, such as about 0.5 millimeter, for example about 1 millimeter, such as about 1.5 millimeter, and independently thereof, wherein the diameter of the microparticles is preferably less than 40 micrometer, for example less than 30 micrometer, for example in the range of from 10 to 20 micrometers.

35 151. The method of any of claims 49 to 149, wherein the majority of the particles or beads, such as more than 75% of the particles or beads, for example

more than 90% of the particles or beads, are in the range of from 0.5 millimeter to 1 millimeter, and independently thereof, wherein the diameter of the spatially immobilised microparticles of said particles or beads is in the range of from 10 to 20 micrometers.

5

10

15

20

25

30

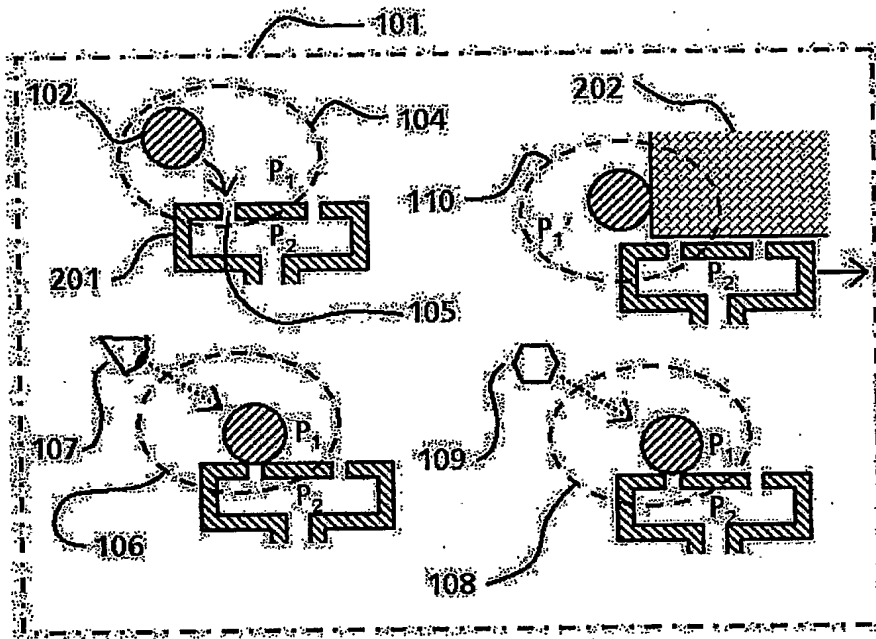


Fig. 2.

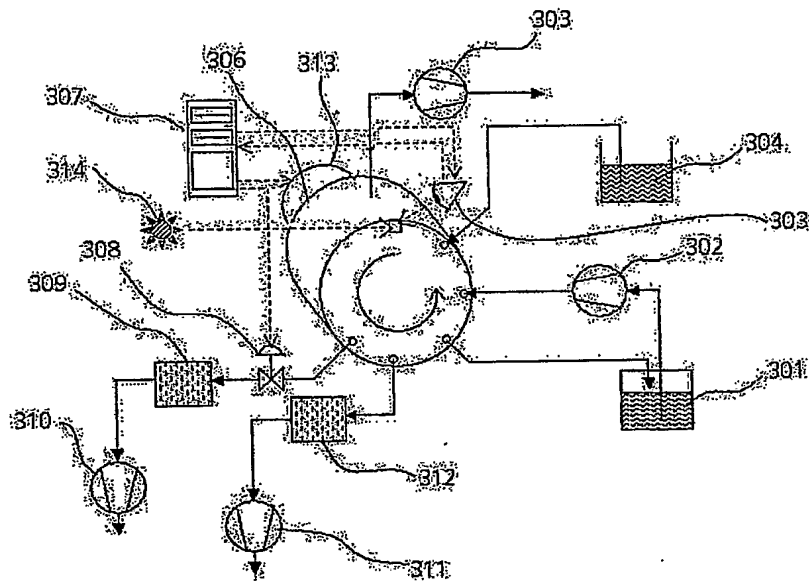


Fig. 3.

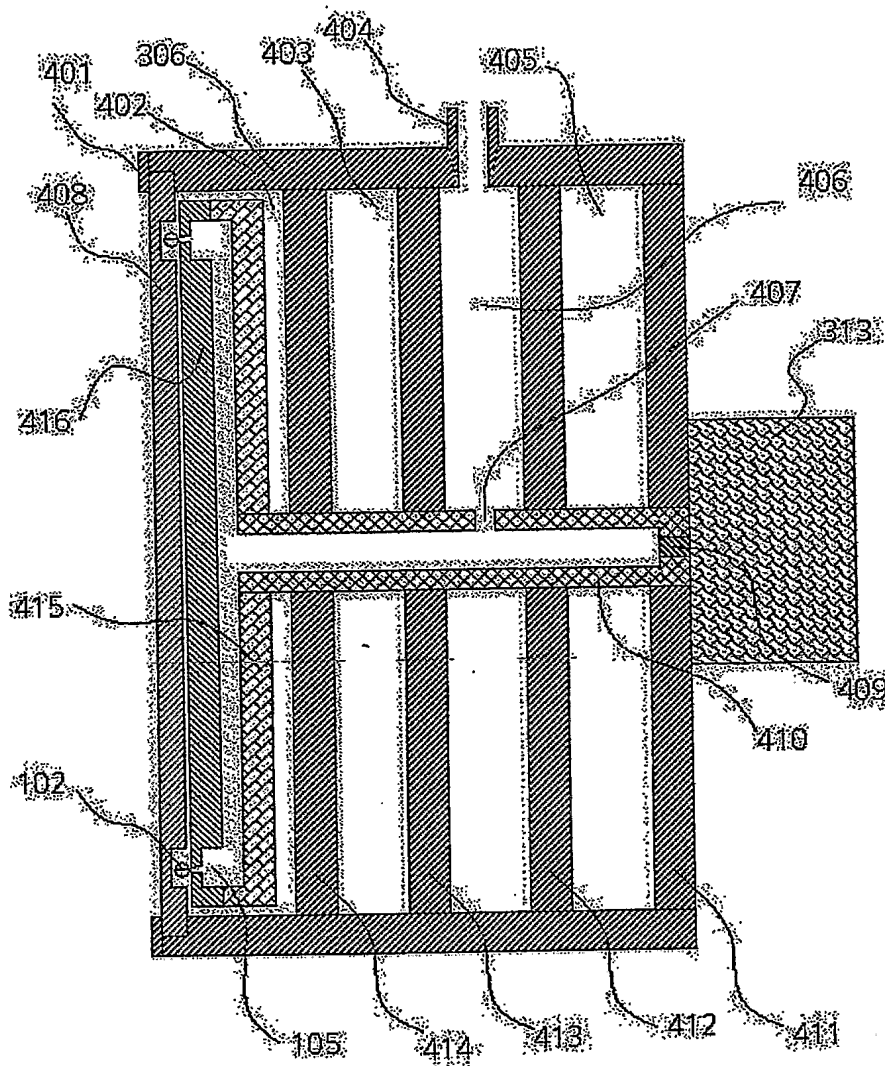


Fig. 4.

130

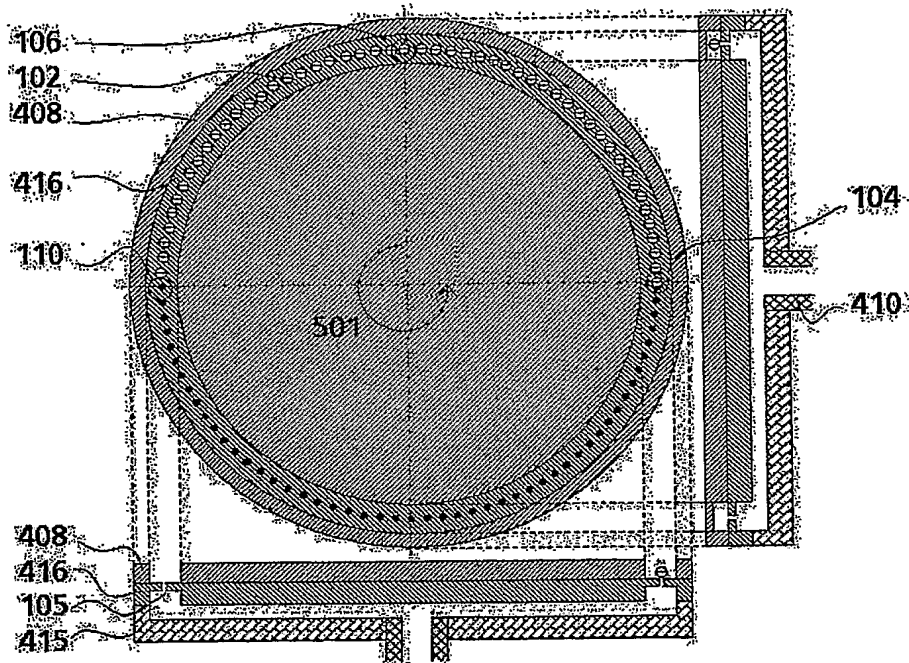


Fig. 5.

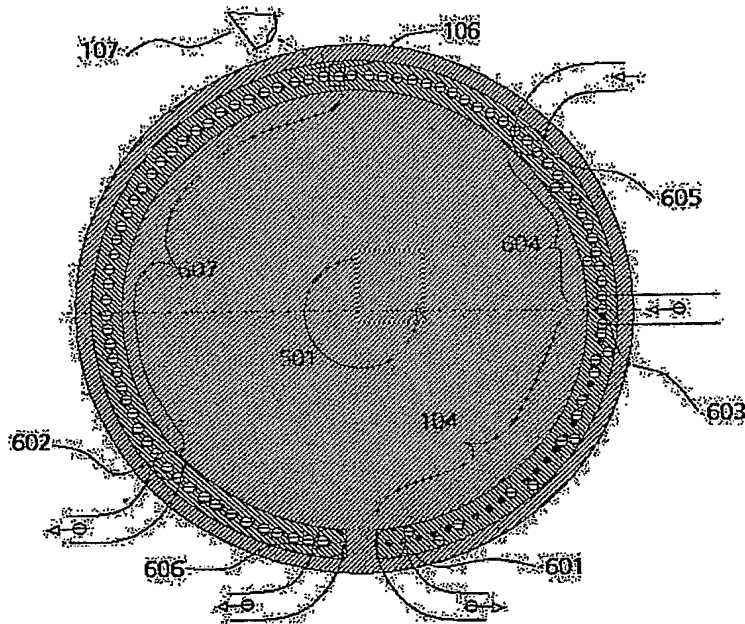


Fig. 6.

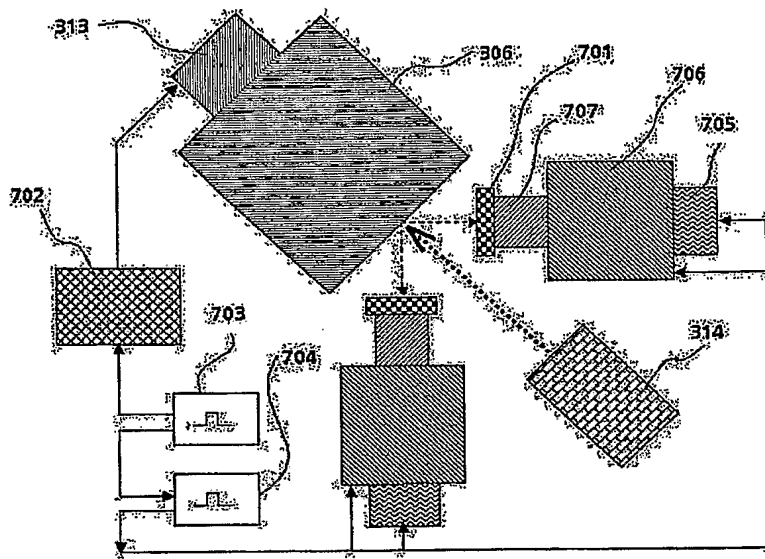


Fig. 7.

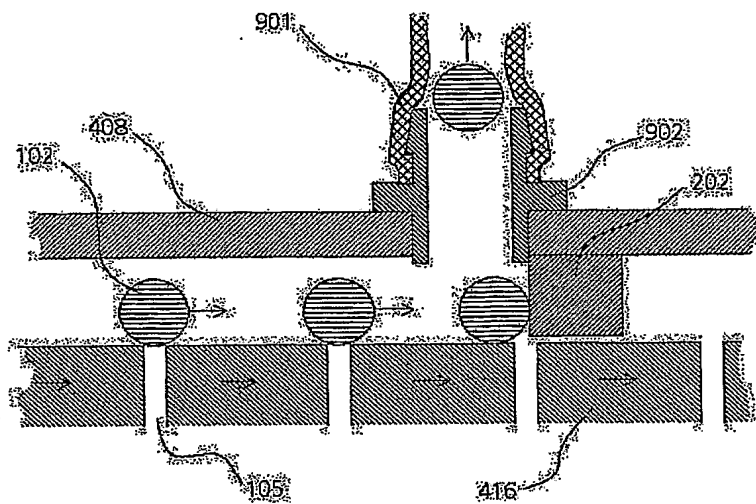


Fig. 9.

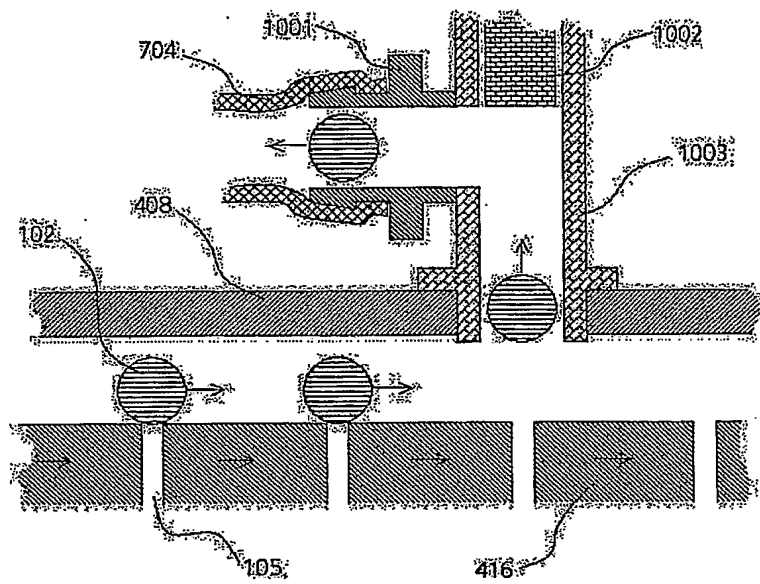


Fig. 10.

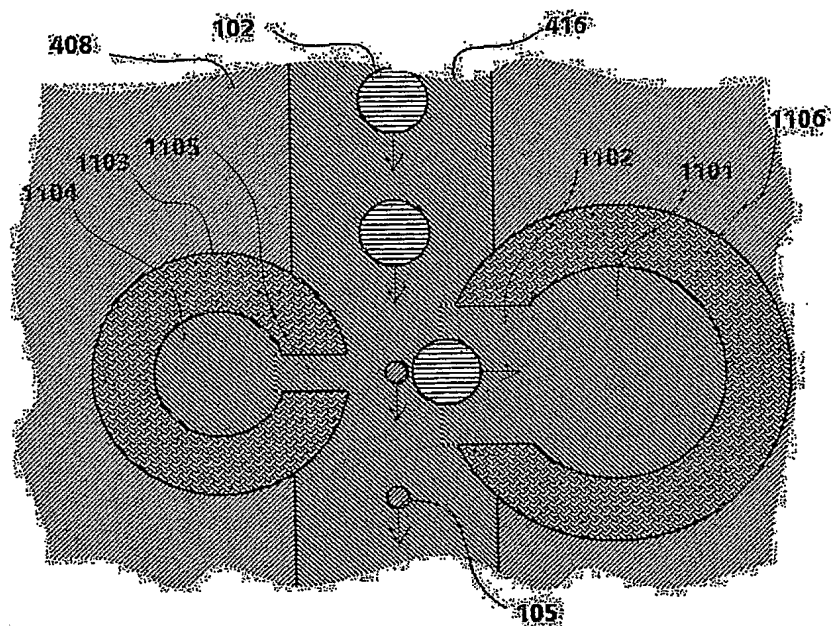


Fig. 11.

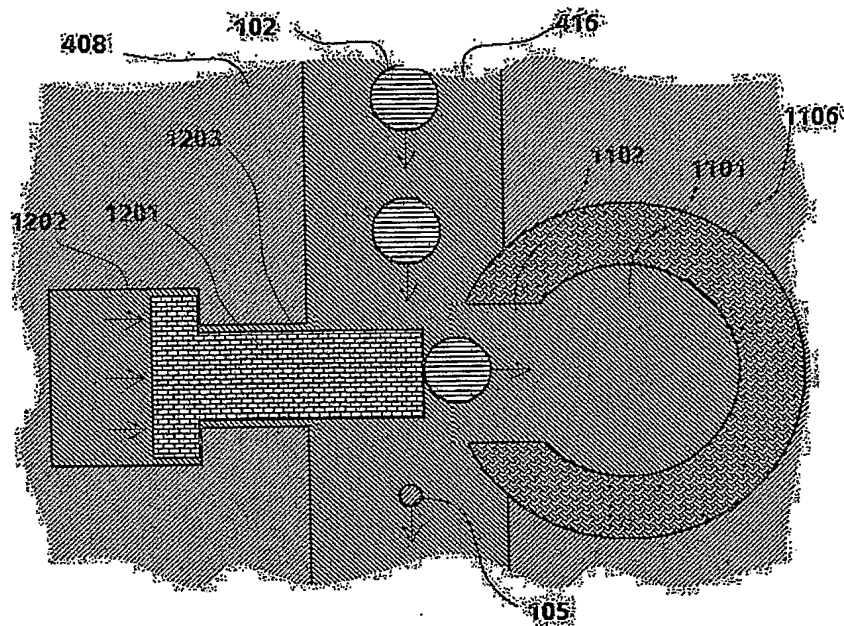


Fig. 12.

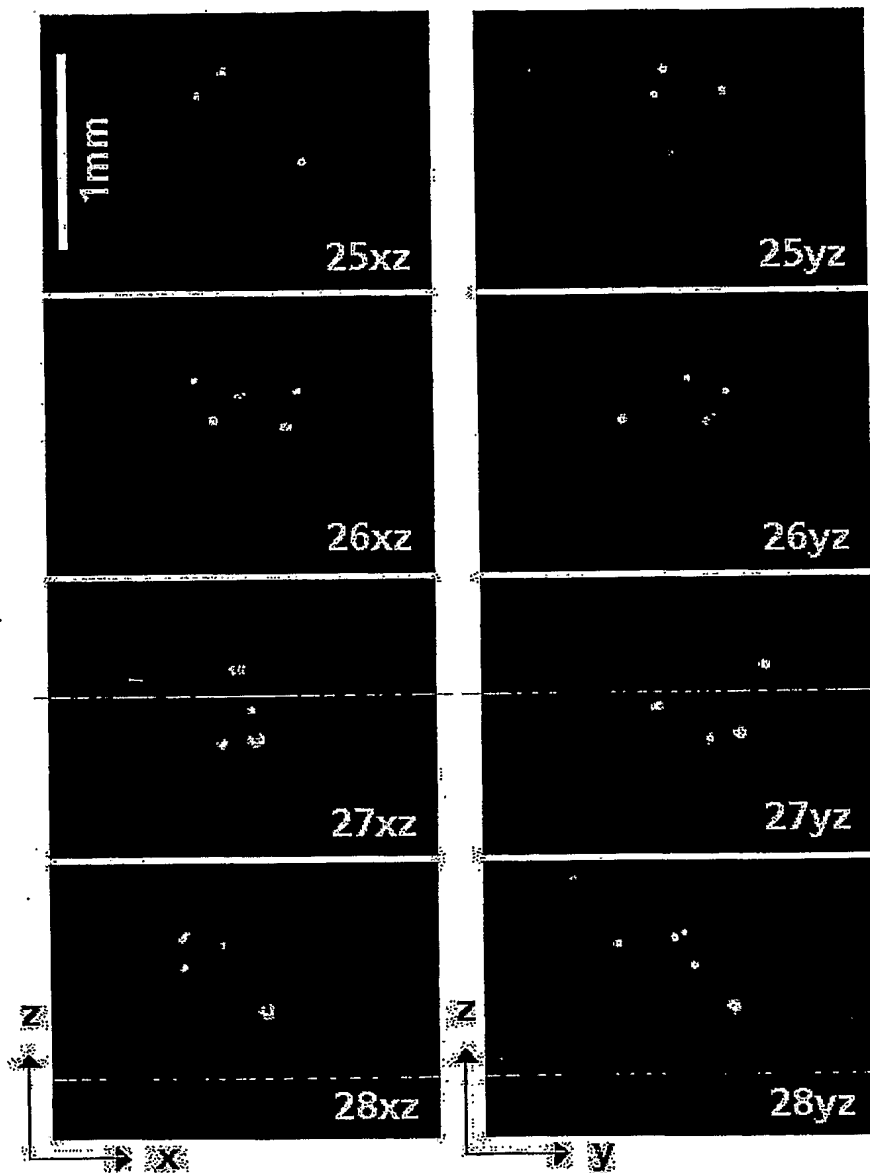


Fig. 13.

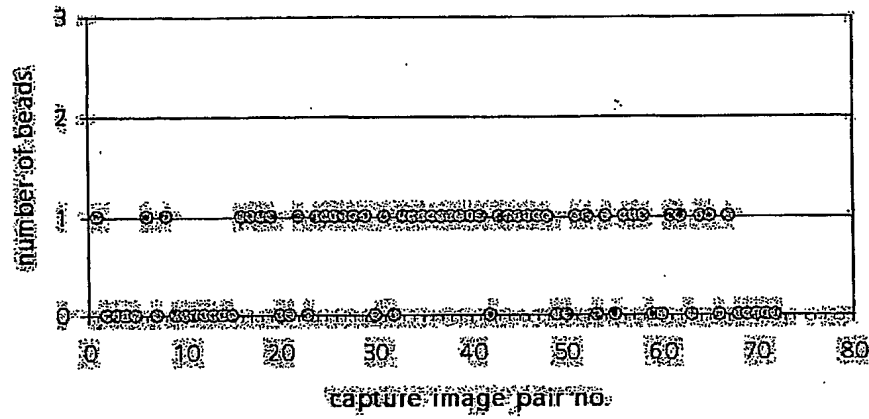


Fig. 14.

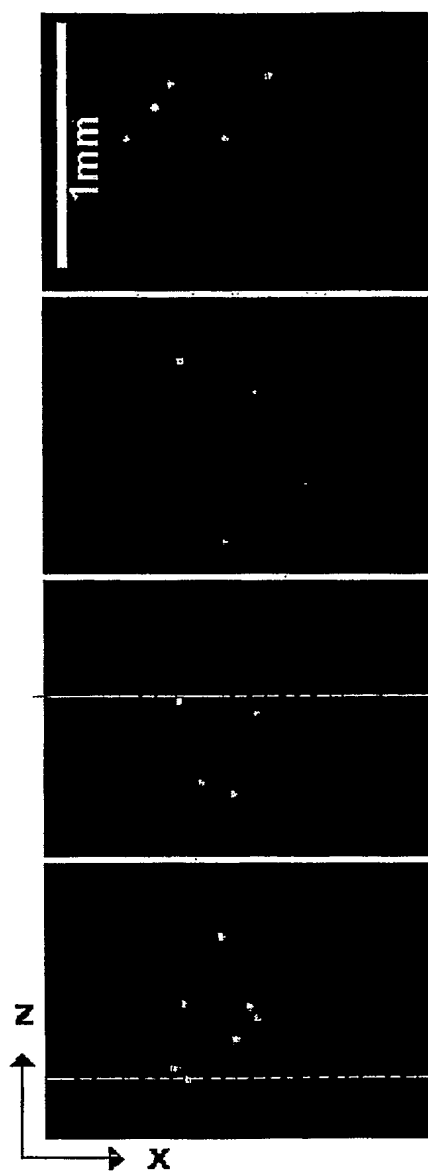


Fig. 15.